

WALL TYPE LEGEND

- 1 NEW PARTITION WALL - 5/8" GWB BOTH SIDES ON 20 GA 3 5/8" METAL STUDS @ 16" O.C. UP TO DECK. PROVIDE BATT INSULATION.
- 1A NEW PARTITION WALL - 5/8" GWB ONE SIDE ON 20 GA 3 5/8" METAL STUDS @ 16" O.C. UP TO MIN. 6" ABOVE CEILING.
- 1B NEW PARTITION WALL - 5/8" GWB ONE SIDE ON 20 GA 3 5/8" METAL STUDS @ 16" O.C. UP TO MIN. 6" ABOVE CEILING.
- 1C NEW PARTITION WALL - 5/8" GWB BOTH SIDES ON 20 GA 3 5/8" METAL STUDS @ 16" O.C. UP TO CERTAIN HEIGHT - SEE PLAN FOR HEIGHT.
- 2 NEW PARTITION WALL - 5/8" GWB BOTH SIDES ON 20 GA 6" METAL STUDS @ 16" O.C. UP TO DECK. PROVIDE SOUND BATT INSULATION.
- 2A NEW PARTITION WALL - 5/8" GWB ONE SIDE ON 20 GA 6" METAL STUDS @ 16" O.C. UP TO MIN 6" ABOVE CEILING, U.N.G. PROVIDE SOUND BATT INSULATION.



GENERAL WALL / FLOOR PLAN NOTES

1. USE MOISTURE RESISTANT GWB AT ALL EXPOSED RESTROOM WALLS, KITCHEN AREA WALLS, WITHIN 4'-0" OF DRINKING FOUNTAIN AND SERVICE SINK, AND AT OTHER WET AREAS.
2. USE SOUND BATT INSULATION AT RESTROOM WALLS AND CEILING.
3. ALL WALLS TO BE TAPED, MUDDING, SANDED AND MADE READY FOR TENANT FINISHES.
4. BRACE ALL STUD PARTITIONS TO STRUCTURE ABOVE AS REQUIRED.
5. SEE FINISH SCHEDULE FOR ALL FINISHES, SCOPE OF WORK, AND RESPONSIBILITY.
6. NEW INFL. SLAB AREAS TO BE 4" THICK REINFORCED SLAB OVER 4" GRAVEL OVER MIN. 10 MIL VAPOR BARRIER SYSTEM TO BE COMPATIBLE WITH EXISTING SLAB.
7. G.C. TO VERIFY EXISTENCE OF HORIZONTAL SLAB REINFORCING ADJACENT TO EXTERIOR COLUMNS. IF PRESENT, NOTIFY ARCHITECT IMMEDIATELY PRIOR TO SLAB CUTS.


Door Schedule							
DOOR NO.	DOOR TYPE	DOOR		FRAME		HARDWARE	COMMENTS
		WIDTH	HEIGHT	MATERIAL	MATERIAL		
101	1	3'-0"	7'-0"	HM	HM	3 BUTT HINGES, SURFACE MOUNTED CLOSER, PUSH/PULL PLATE, KICK PLATE, DOOR SILENCER SET, WALL MOUNT STOP	RESTROOM DOOR
102	1	3'-0"	7'-0"	HM	HM	3 BUTT HINGES, SURFACE MOUNTED CLOSER, PUSH/PULL PLATE, KICK PLATE, DOOR SILENCER SET, WALL MOUNT STOP	RESTROOM DOOR
100D	3	12'-0"	14'-0"	PER MANUF.	PER MANUF.		OVERHEAD DOOR
100E	3	12'-0"	14'-0"	PER MANUF.	PER MANUF.		OVERHEAD DOOR
100B	1	3'-0"	7'-0"	HM	HM	3 BUTT HINGES, SURFACE MOUNTED CLOSER, EXTERIOR LOCKSET, PANIC HARDWARE, DOOR SILENCER SET, WALL MOUNT STOP	EXTERIOR DOOR
100A	1	3'-0"	7'-0"	HM	HM	3 BUTT HINGES, SURFACE MOUNTED CLOSER, EXTERIOR LOCKSET, DOOR SILENCER SET, WALL MOUNT STOP	EXTERIOR DOOR
100C	1	3'-0"	7'-0"	HM	HM	3 BUTT HINGES, SURFACE MOUNTED CLOSER, EXTERIOR LOCKSET, PANIC HARDWARE, DOOR SILENCER SET, WALL MOUNT STOP	EXTERIOR DOOR
100F	1	3'-0"	7'-0"	HM	HM	3 BUTT HINGES, SURFACE MOUNTED CLOSER, EXTERIOR LOCKSET, PANIC HARDWARE, DOOR SILENCER SET, WALL MOUNT STOP	EXTERIOR DOOR

DOOR / HARDWARE NOTES

1. EXACT DOOR STYLE, OPTIONS, MATERIAL AND FINISH TO BE APPROVED BY ARCHITECT AND OWNER.
2. HARDWARE SPEC'S TO BE APPROVED BY ARCHITECT AND OWNER.
3. EXACT FINISH, FUNCTION AND OPTIONS FOR DOOR HARDWARE TO BE APPROVED BY ARCHITECT AND OWNER OR TENANT.

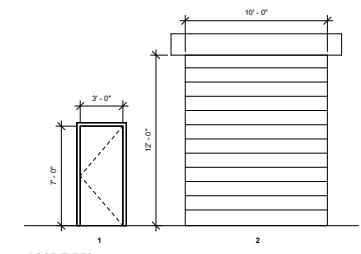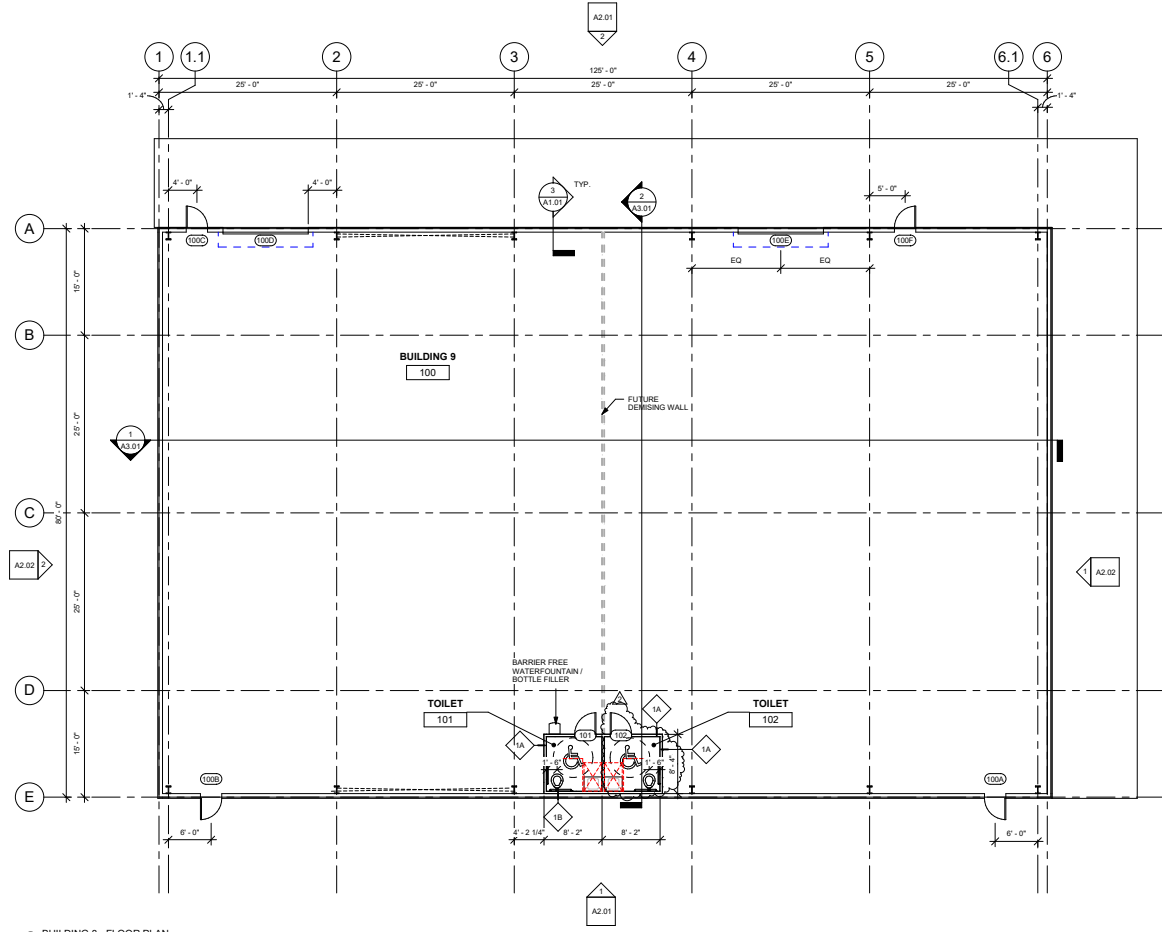


DOOR TYPES
 1/4" = 1'-0"



MINIMUM REQUIRED CLEARANCES AT ALL DOORS. NOTIFY ARCHITECT PRIOR TO INSTALLING FRAME IF THESE CLEARANCES CANNOT BE MAINTAINED.

TYP. DOOR CLEARANCE DETAIL
 1/4" = 1'-0"



TYP. WALL SECTION - SIDEWALL
 1/2" = 1'-0"



MARSH BELL
 FAIRFIELD BUSINESS PARK -
 BUILDING 9
 GREENVILLE COUNTY, SC

DATE	PROJECT NUM:	ISSUE DATE
		24917
REVISIONS:	NO. DESCRIPTION	DATE
	0 PERMIT/CONSTRUCTION	11/01/2024
	2 REVISION	03/07/2025

DRAWING:
 BUILDING 9 - FLOOR PLAN

A1.01

THIS DRAWING AND ASSOCIATED ELECTRONIC FILES ARE THE PROPERTY OF CARYTAD ARCHITECTURE COMPANY, LLC (CAC) AND ARE TO ONLY BE USED FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN. DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED, MODIFIED, OR USED FOR OTHER PROJECTS OR SITES IN ANY FORM WITHOUT WRITTEN PERMISSION FROM CAC. COPYRIGHT 2025 CARYTAD ARCHITECTURE COMPANY, LLC. ALL RIGHTS RESERVED.
 3/7/2025 2:41:58 PM C:\Users\ashah\My Documents\Architect\Architect\Company\911 - Greenville\2025\A1.01 - Fairfield Business Park\FairfieldBldg_1\251017