


REVISIONS/DATES

NO.	DATE	DESCRIPTION

OWNER AND CONTRACTOR AGREE TO HOLD ARCHITECT HARMLESS FROM AND AGAINST ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES, INCLUDING REASONABLE ATTORNEY'S FEES, ARISING FROM ANY AND ALL SUCH CLAIMS, DAMAGES, LOSSES AND EXPENSES, WHETHER CAUSED IN WHOLE OR IN PART BY NEGLIGENCE OR OTHERWISE, AND WHETHER OR NOT SUCH CLAIMS, DAMAGES, LOSSES AND EXPENSES ARE PREVENTED BY COPYRIGHT LAW.

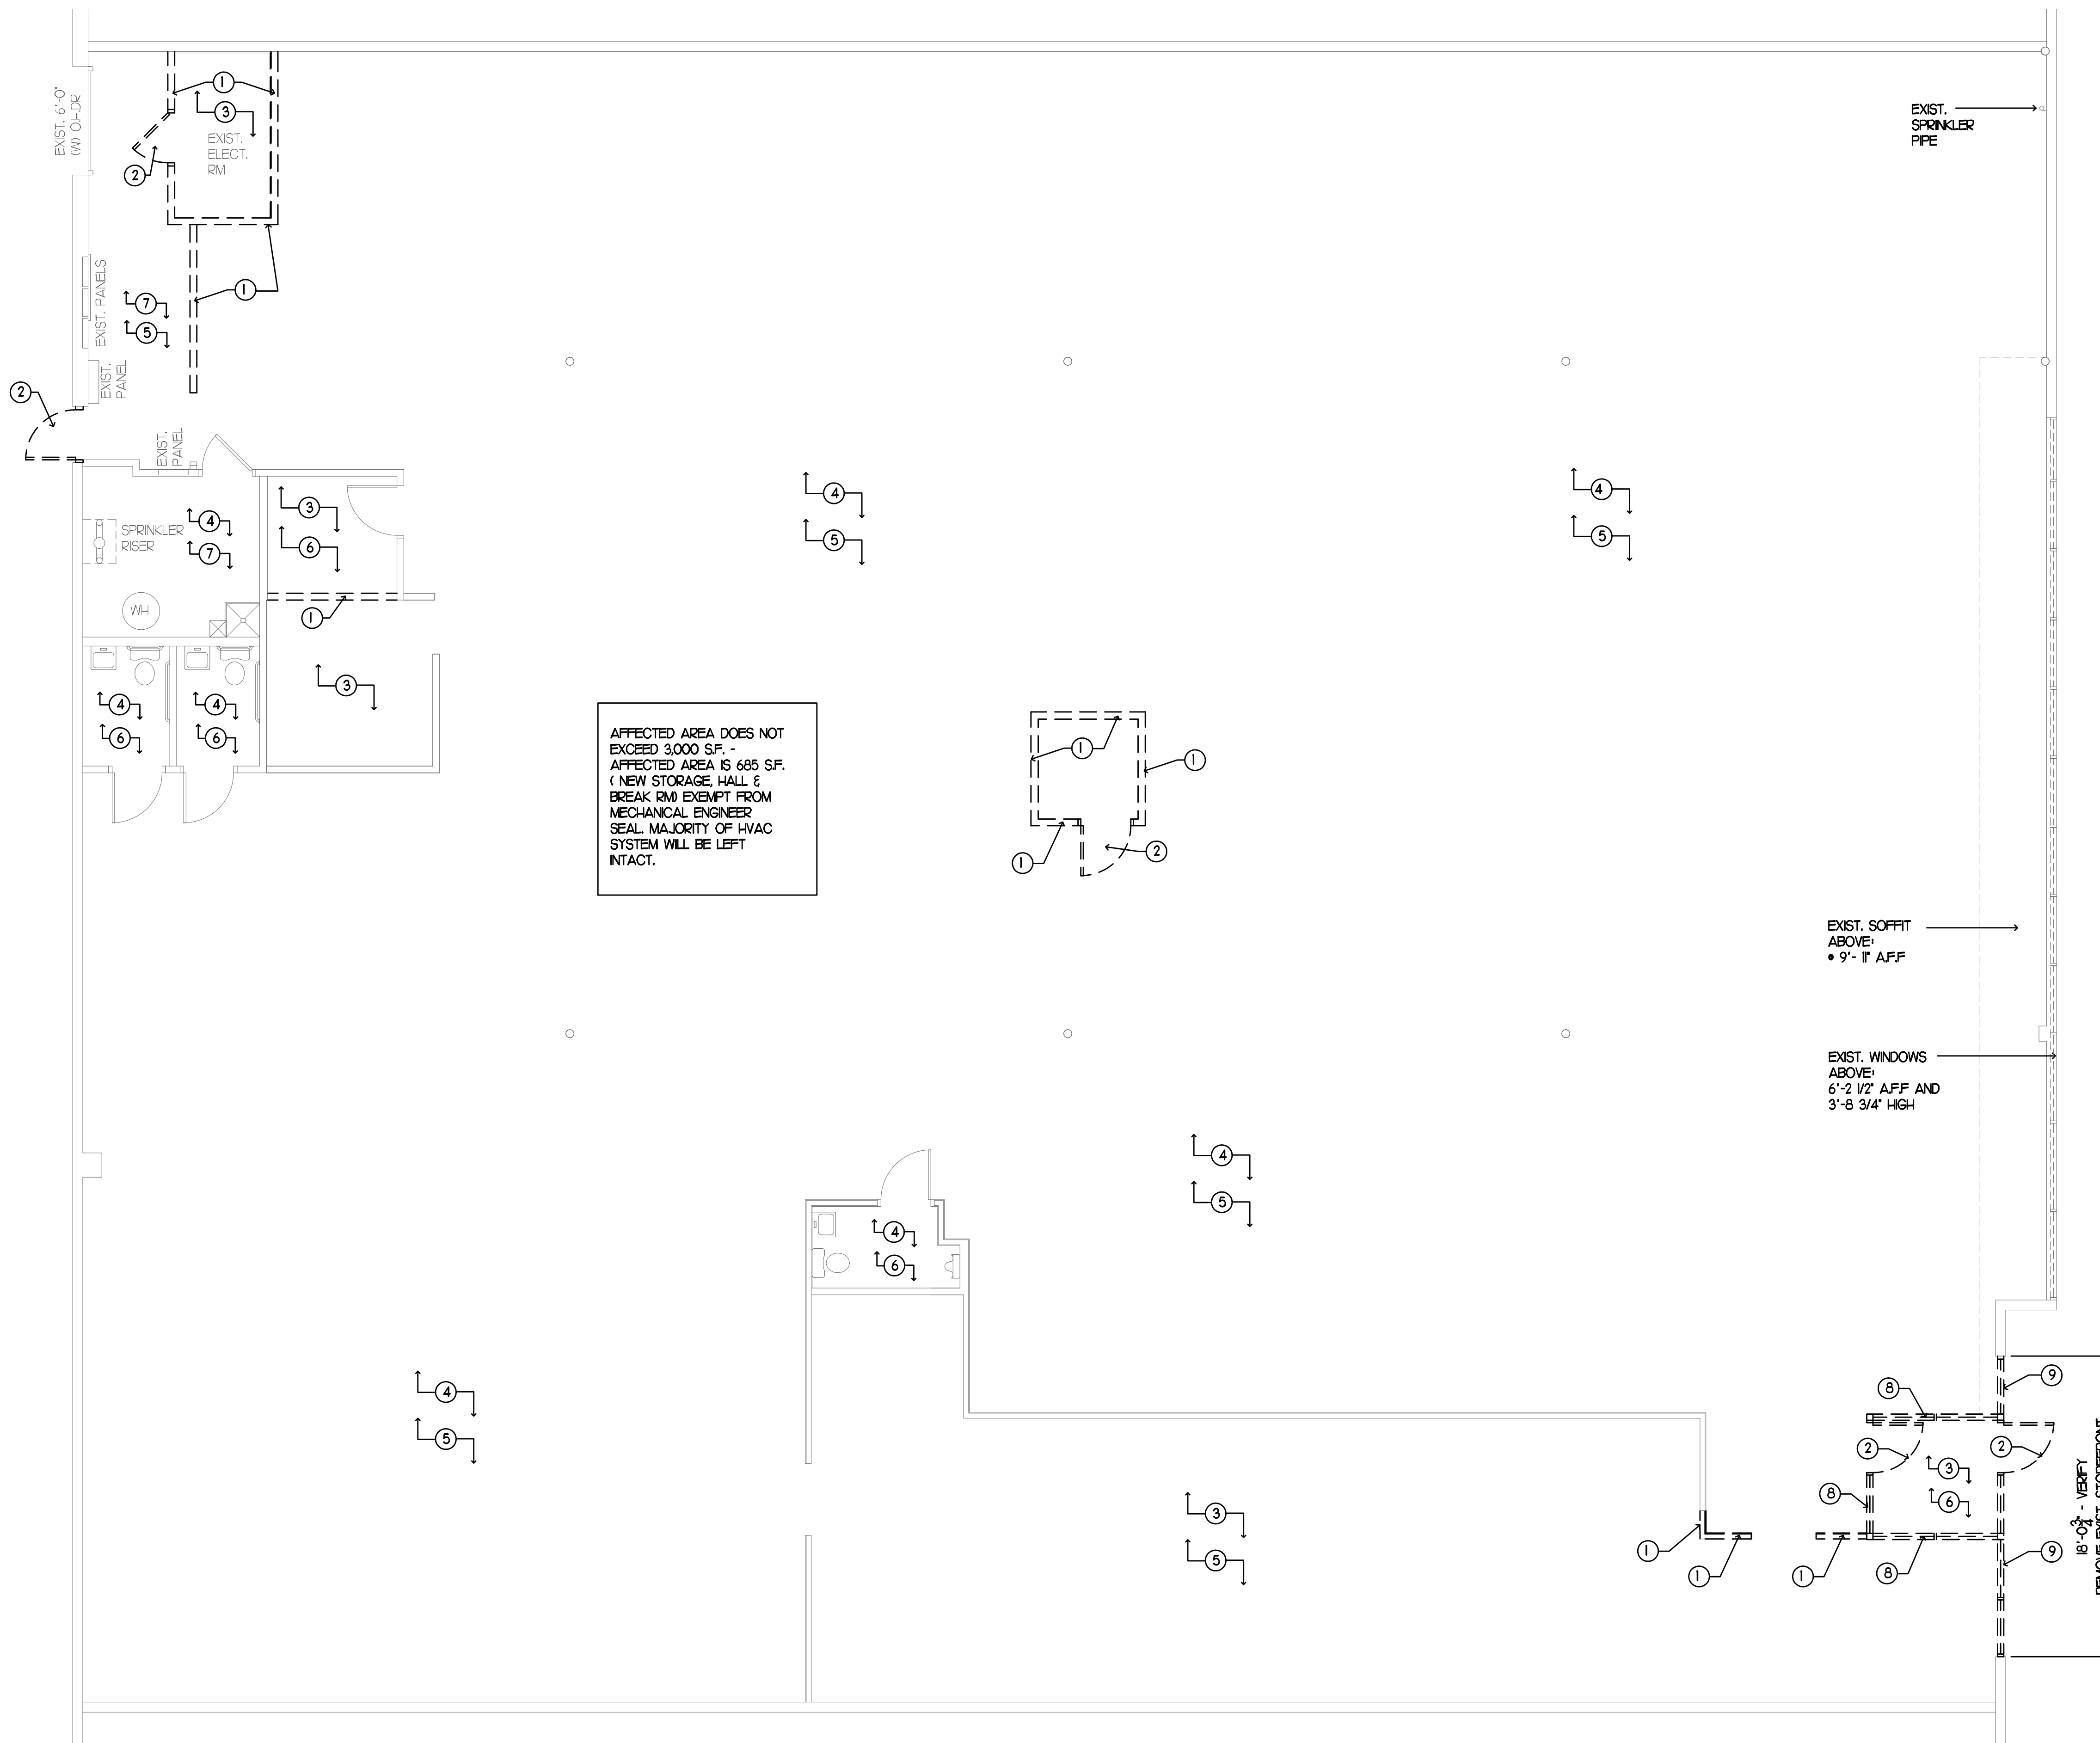


AFFECTED AREA DOES NOT EXCEED 3,000 S.F. - AFFECTED AREA IS 685 S.F. (NEW STORAGE HALL & BREAK RM) EXEMPT FROM MECHANICAL ENGINEER SEAL. MAJORITY OF HVAC SYSTEM WILL BE LEFT INTACT.

- CODED DEMO NOTES:** PATCH & REPAIR ALL EXISTING WALLS AS REQ.
- 1 REMOVE EXISTING WALLS w/GYP, BD, FINISHES & ALL ACCESSORIES
 - 2 REMOVE EXISTING DOOR, DOOR FRAMES, DOOR STOPS, CLOSERS, HARDWARE, ETC. SEE PROPOSED FLOOR PLAN FOR DOOR RELOCATION. GO TO RELOCATE / RE-USE ALL DOORS THAT ARE POSSIBLE
 - 3 EXISTING FLOORING TO REMAIN - EXISTING BASE TO BE REMOVED. SEE PROPOSED PLANS.
 - 4 EXISTING FLOORING & BASE TO REMAIN. SEE PROPOSED PLANS.
 - 5 EXISTING EXPOSED STRUCTURE TO REMAIN. SEE PROPOSED PLANS.
 - 6 EXISTING GYP, BD CEILING TO REMAIN. SEE PROPOSED PLANS.
 - 7 EXISTING CONCRETE FLOOR TO REMAIN
 - 8 REMOVE EXISTING VESTIBULE, GLASS, DOORS & ALL ACCESSORIES
 - 9 REMOVE EXISTING STOREFRONT, GLASS, DOORS & ALL ACCESSORIES



- GENERAL DEMOLITION NOTES:**
1. SUBCONTRACTOR SHALL CUT AND CAP ALL UNUSED EXISTING FLOOR CONDUIT AT FINISHED FLOOR LEVEL, FILLING WITH INSULATION AND PATCHING WITH CONCRETE. VERIFY ALL LOCATIONS
 2. PATCH ALL EXISTING WALLS TO REMAIN WHERE ADJACENT WALLS HAVE BEEN REMOVED. MATCH EXISTING MATERIALS, TEXTURE AND FINISH WHERE NOTED
 3. REMOVE ALL DEMOLISHED MATERIALS FROM THE SITE AS NECESSARY, HOWEVER, MATERIAL REMOVAL MAY BE REQUIRED MORE FREQUENTLY SO SCRAP MATERIALS DO NOT HINDER THE PROGRESS OF OTHER TRADES.
 4. FACE OF NEWLY EXTENDED WALLS SHALL BE FLUSH WITH THE FACE OF THE EXISTING WALL
 5. ALL SUBCONTRACTORS TO USE CAUTION DURING DEMOLITION. DO NOT DAMAGE SALVAGEABLE MATERIALS OR FINISHES TO REMAIN. THE COST OF ANY ITEMS DAMAGED WILL BE DEDUCTED FROM THE CONTRACT AMOUNT.
 6. SUBCONTRACTOR SHALL VISIT THE SITE BEFORE SUBMITTING A BID. VERIFY THAT ALL SALVAGEABLE MATERIALS ARE IN GOOD WORKING CONDITION. SUBCONTRACTORS ARE RESPONSIBLE FOR REPLACING ANY INADEQUATE MATERIAL WITH NEW * SUBCONTRACTOR'S SOLE COST & EXPENSE IF NOT BROUGHT TO TENANT'S ATTENTION PRIOR TO BID SUBMITTAL.
 7. ALL EXISTING WALLS TO REMAIN SHALL BE PATCHED/SKIM COATED AS REQUIRED TO MAKE SMOOTH W/NEW ADJACENT WALLS.
 8. ALL INTERIOR SURFACES DAMAGED OR LEFT UNFINISHED BY DEMOLITION SHALL BE PATCHED TO MATCH EXISTING ADJACENT SURFACES IN MATERIAL, COLOR & TEXTURE.
 9. CUT & PATCH CONCRETE AS REQUIRED -COORDINATE LOCATION OF ALL PROPOSED PLUMBING/HVAC AND OTHER CUTS OR PATCHING REQUIRED FOR DEMO AND PROPOSED ITEMS.
 10. THE CONTRACTOR SHALL COORDINATE WITH THE LANDLORD/OWNER ALL PROVISIONS REQUIRED FOR DUST CONTROL, DEBRIS REMOVAL SHUT-OFFS, ETC.
 11. CONTRACTOR SHALL USE OWNERS ACCESS ROUTE FOR WORKMEN, MATERIAL SUPPLY AND REMOVAL TO CONSTRUCTION DEBRIS CONTAINER. INTERIOR FINISHES SHALL BE PROTECTED AT ALL TIMES.
 12. ANY WORK THAT AFFECTS ADJACENT AREAS OF THE SPACE WILL NEED TO BE COORDINATED WITH OWNER.
 13. REMOVE EXISTING INTERIOR DOORS, DOOR FRAMES, DOOR STOPS, CLOSERS, HARDWARE, ETC. WHERE NOTED
 14. ALL WALLS DESIGNATED FOR DEMOLITION TO BE REMOVED COMPLETELY INCLUDING ALL MATERIALS ABOVE CEILING HEIGHT (IE. METAL STUD KICKERS, SUPPORTS, FASTENERS, BRACING, ETC.). ALL FASTENERS TO THE FLOOR SHALL BE REMOVED BELOW, OR FLUSH WITH THE CONCRETE FLOOR.
 15. FRAMING SUBCONTRACTORS SHALL PROVIDE WOOD BLOCKING IN WALLS FOR ALL WALL MOUNTED FIXTURES, SIGNS, EQUIPMENT, CABINETS, COAT RACKS, DOOR BUMPERS STOPS, TOILET ACCESSORIES, ETC. AS NEEDED.
 16. CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS. CONTACT ARCHITECT WITH ANY DISCREPANCIES OR CONFLICTS THAT OCCUR ON THE PLAN WITH FIELD CONDITIONS.

REVISIONS/DATES		
NO.	DATE	DESCRIPTION

OWNER AND CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL INFORMATION AND CONDITIONS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL INFORMATION AND CONDITIONS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL INFORMATION AND CONDITIONS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL INFORMATION AND CONDITIONS PRIOR TO CONSTRUCTION.

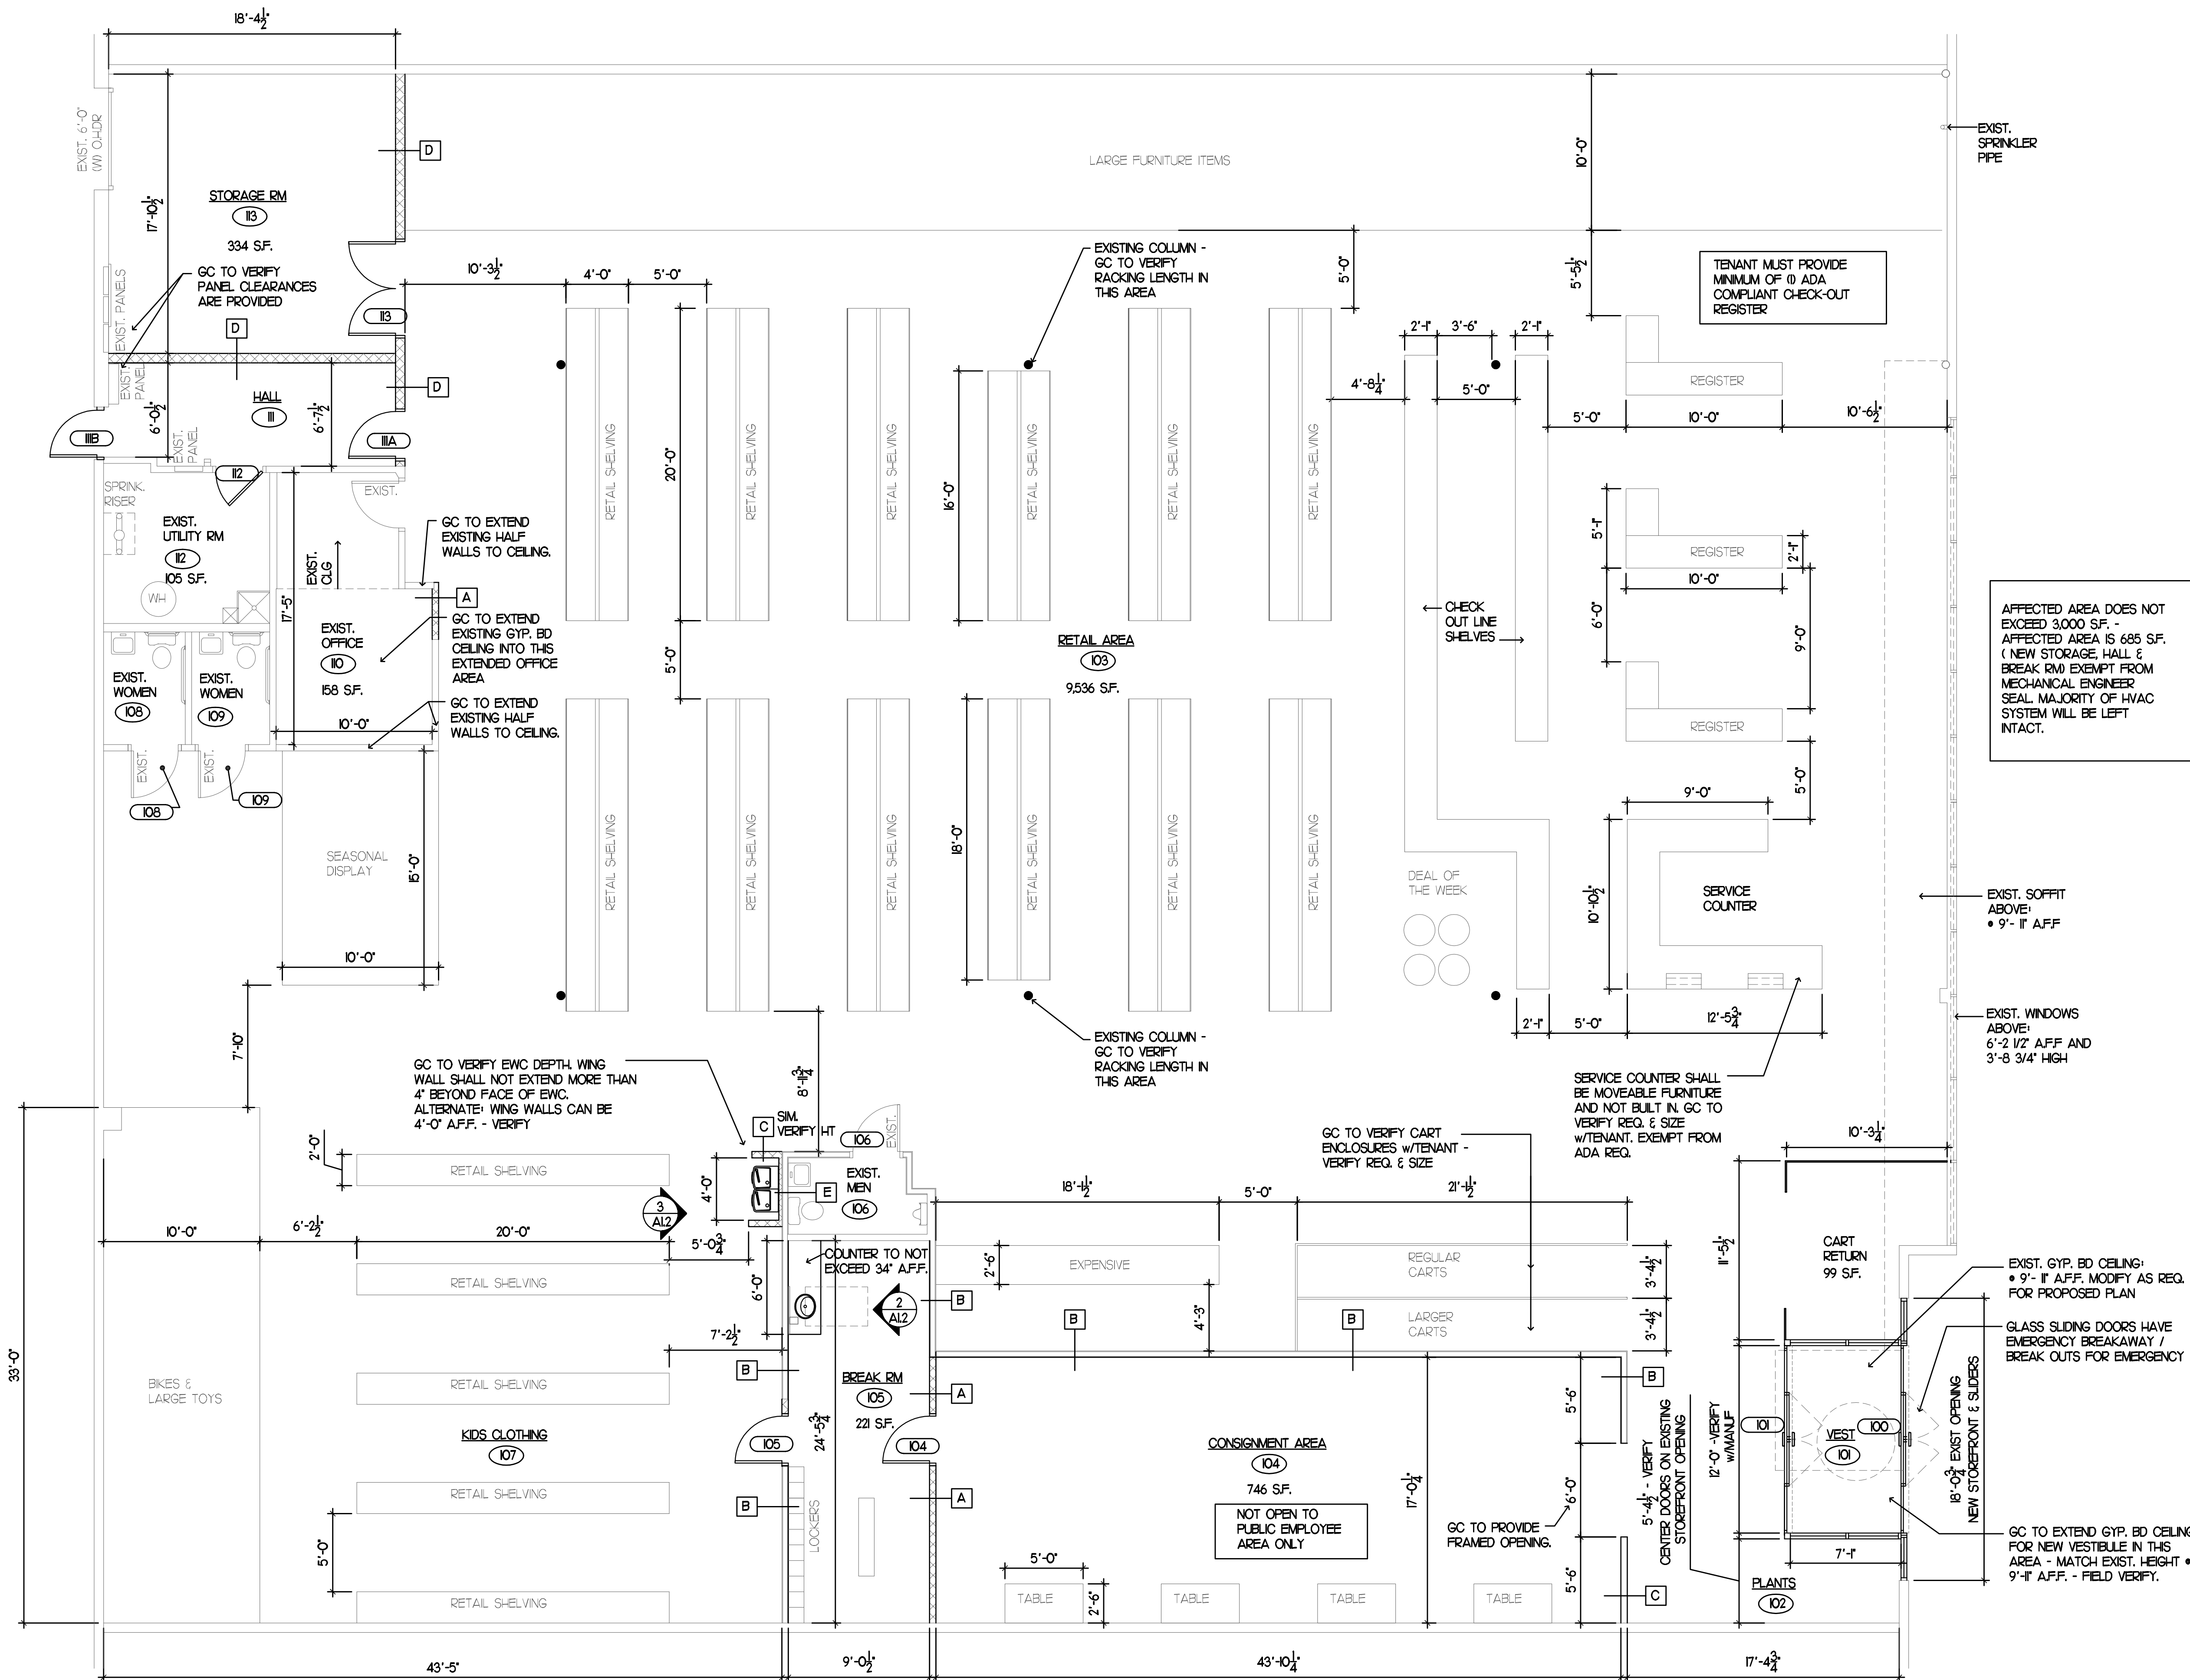

AFFECTED AREA DOES NOT EXCEED 3000 SF. - AFFECTED AREA IS 685 SF. (NEW STORAGE HALL & BREAK RM) EXEMPT FROM MECHANICAL ENGINEER SEAL. MAJORITY OF HVAC SYSTEM WILL BE LEFT INTACT.

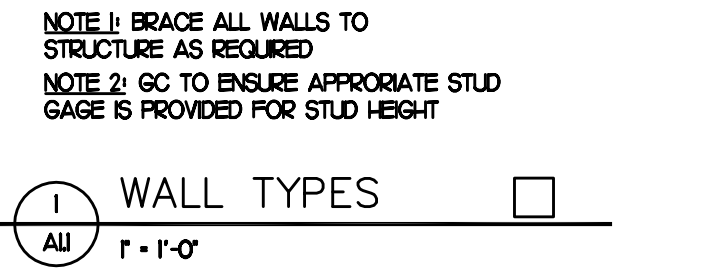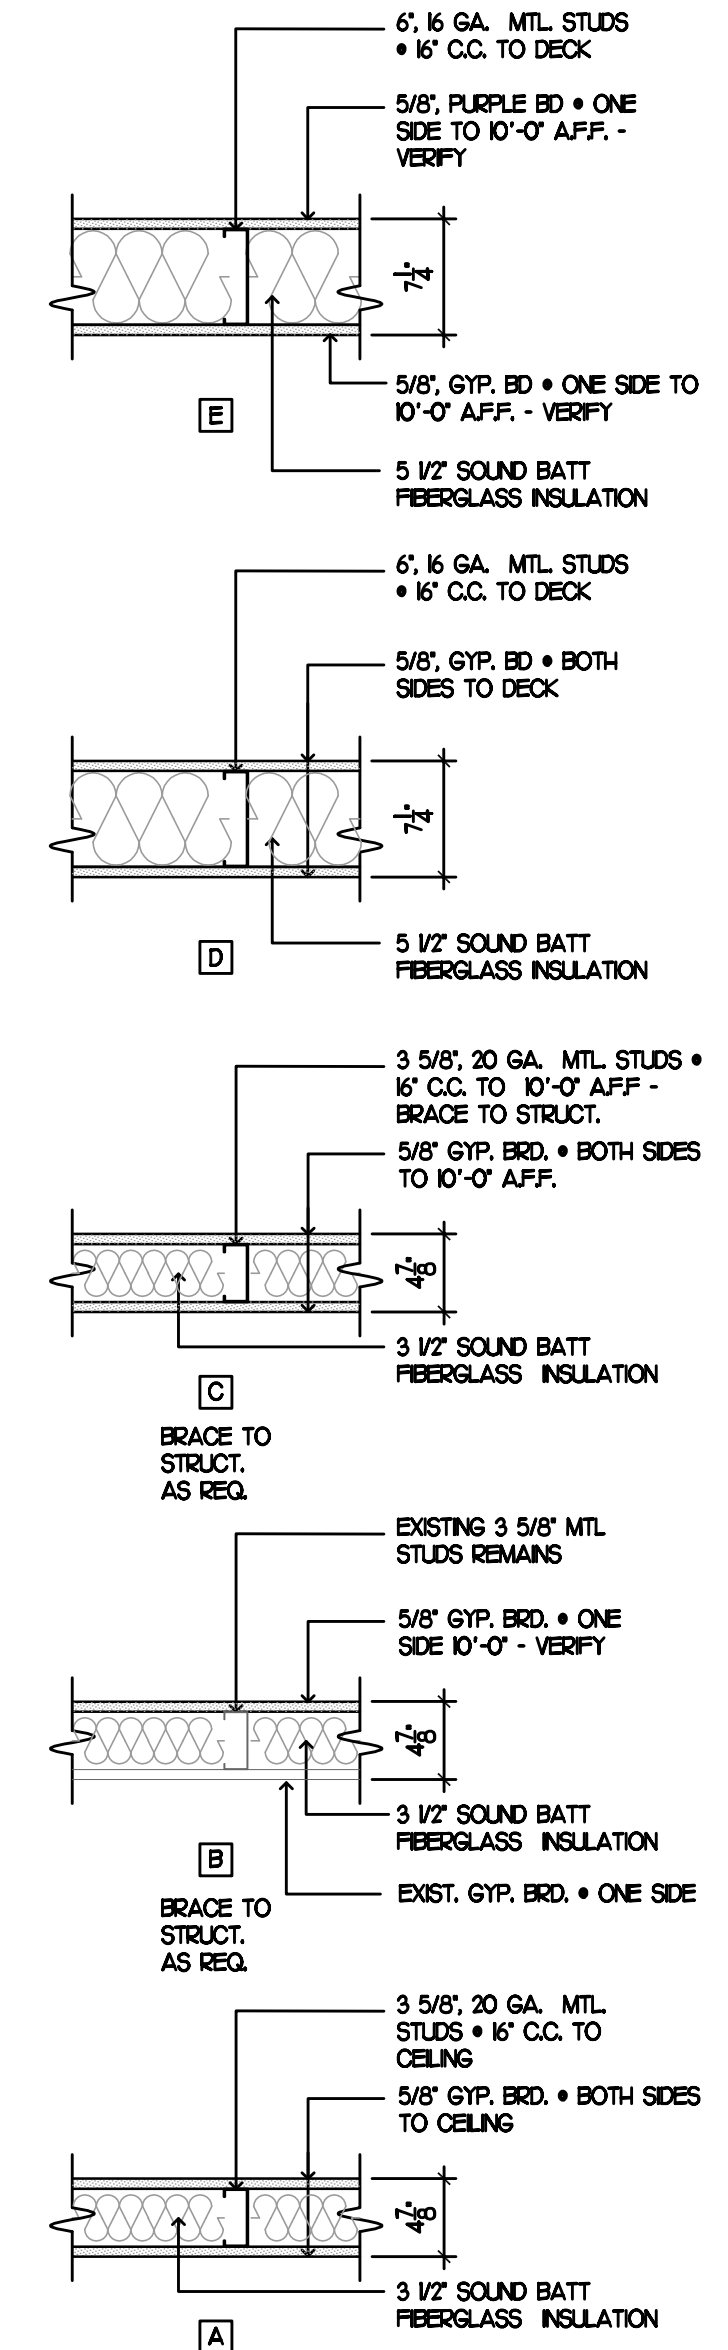

- WALL TYPES NOTES:**
- BRACE ALL WALLS TO STRUCTURE AS REQUIRED. IF WALLS GO TO STRUCTURE PROVIDE DEFLECTION ANGLE TO ALLOW FOR MOVEMENT AS REQ.
 - PROVIDE PURPLE BOARD OR EQUAL FOR ALL WET WALLS AS REQUIRED.
 - TYPICAL GC TO PROVIDE GYP. BD FOR ALL EXTERIOR EXIST. WALLS IF NOT PRESENT. VERIFY THAT INSULATION & VAPOR BARRIER ARE PRESENT
 - TYPICAL - SEE SCHEDULES FOR WALL FINISH IN REGARDS TO PAINT, ETC.

PROPOSED PLAN
3/16\"/>



ECO THRIFT - TENANT FINISH
9777 Q STREET
OMAHA, NEBRASKA

GRID
ARCHITECTURE, LLC
T. (402) 966-6625
F. (866) 443-7621



06/03/22

A1.1
PROPOSED FLOOR PLAN

DOOR SCHEDULE

VERIFY HARDWARE & FINISHES w/TENANT

DOOR MARK	DOORS LOCATION	LEAF SIZE (WxHxT)	MATERIAL	FINISH	TYPE	FRAME		HARDWARE		NOTES
						MATERIAL	FINISH	SET NO.	LOCK TYPE	
100	VESTIBULE	8H-PART SLIDER VERIFY SIZE	ALUM / GLASS	ANODIZED	A	ALUMINUM	ANODIZED	1	VERIFY w/MANUF	DOORS MUST HAVE BREAK-AWAY IN EVENT OF POWER FAILURE
101	VESTIBULE	8H-PART SLIDER VERIFY SIZE	ALUM / GLASS	ANODIZED	B	ALUMINUM	ANODIZED	1	VERIFY w/MANUF	DOORS MUST HAVE BREAK-AWAY IN EVENT OF POWER FAILURE
104	CONSIGNMENT AREA	3'-0" x 7'-0" x 1 3/4"	H.C. WOOD	PANDED	C	WOOD	PANT	2	PASSAGE	
105	BREAK RM	3'-0" x 7'-0" x 1 3/4"	H.C. WOOD	PANDED	C	WOOD	PANT	2	PASSAGE	
106	EXIST. MEN	EXISTING	EXISTING	EXISTING	EXIST.	EXISTING	EXISTING	3	PRIVACY	MODIFY EXIST. AS REQUIRED
108	EXIST. WOMEN	EXISTING	EXISTING	EXISTING	EXIST.	EXISTING	EXISTING	3	PRIVACY	MODIFY EXIST. AS REQUIRED
109	EXIST. WOMEN	EXISTING	EXISTING	EXISTING	EXIST.	EXISTING	EXISTING	3	PRIVACY	MODIFY EXIST. AS REQUIRED
11A	HALL	3'-0" x 7'-0" x 1 3/4"	H.M.	PANDED	D	H.M.	PANT	4	PASSAGE	
11B	HALL	3'-0" x 7'-0" x 1 3/4"	H.M.	PANDED	E	H.M.	PANT	5	ENTRANCE	INSULATED - DOOR TO REMAIN UNLOCKED DURING BUSINESS HRS
12	EXIST. UTILITY RM.	3'-0" x 7'-0" x 1 3/4"	H.M.	PANDED	D	H.M.	PANT	6	STOREROOM	
13	STORAGE RM	(FR) 3'-0" x 8'-0" x 1 3/4"	H.M.	PANDED	F	H.M.	PANT	7	PANIC	

HARDWARE SET:

VERIFY ALL KEYING REQUIREMENTS w/TENANT
GC TO CONFIRM / VERIFY ALL HARDWARE & FINISHES w/TENANT

HARDWARE SET #1:
FIELD VERIFY ROUGH OPENING FOR WIDTH AND HEIGHT FOR DOOR OPENING

MANUFACTURER TO PROVIDE ALL REQUIRED HARDWARE - VERIFY ALL OPTIONS w/TENANT

GLASS SLIDING DOORS HAVE EMERGENCY BREAKAWAY / BREAK-OUTS FOR EMERGENCY
GC TO PROVIDE POWER AS REQ.

LOCKING - 2 OR THREE POINT - VERIFY w/TENANT
8 1/4" RAIL - 4" STANDARD - VERIFY
2 COMBINED ACTIVATION / SAFETY SENSORS THRESHOLD - VERIFY w/MANUF. - EXTERIOR DOOR ONLY

DOOR SHALL ALWAYS OPEN FROM INTERIOR DURING NORMAL BUSINESS HOURS

HARDWARE SET #2:

3 EA. HINGES, STANLEY, FEBRA, 45 X 45, NRP,
1 EA. PASSAGE LATCH-SET, LEVER LOCK - FALCON, BROS DANE 626
1 EA. CLOSER, LCN, 404L, AL
1 EA. WALL STOP - 'ROCKWOOD', 409

HARDWARE SET #3: (MODIFY EXIST. AS REQUIRED)

3 EA. HINGES, STANLEY, FEBRA, 45 X 45, NRP,
1 EA. PRIVACY LATCH-SET, LEVER LOCK - FALCON, BROS DANE 626
1 EA. CLOSER, LCN, 404L, AL
1 EA. WALL STOP - 'ROCKWOOD', 409

SIGNAGE FOR RESTROOM:

ADA RESTROOM SIGNAGE - 'ROCKWOOD', (WOMEN & MEN)
BLACK - VERIFY COLOR w/TENANT
MOUNT SIGNAGE TO WALL ADJACENT TO LATCH SIDE OF DOOR + 60" AFF. TO CENTERLINE OF SIGNAGE PER ADA REQUIREMENTS

HARDWARE SET #4:

3 EA. HINGES, STANLEY, FEBRA, 45 X 45, NRP,
1 EA. PASSAGE LATCH-SET, LEVER LOCK - FALCON, BROS DANE 626
1 EA. CLOSER, LCN, 404L, AL
1 EA. WALL STOP - 'ROCKWOOD', 409
3 EA. SILENCER - 'IVES', SR64, GR7

HARDWARE SET #5:


3 EA. HINGES, STANLEY, FEBRA, 45 X 45, NRP,
1 EA. ENTRANCE LATCH-SET, LEVER LOCK - FALCON, BROS DANE 626
1 EA. CLOSER, LCN, 404L, AL
1 EA. 1/2" THRESHOLD, PENKO, 27A
1 EA. SWEEP, PENKO, 350N
1 EA. HEAD & JAMB WEATHERSTRIPPING, PENKO, 290AS
1 EA. DRP CAP, PENKO, 346C
1 EA. KICK PLATE - 'ROCKWOOD', 10050 12" X 34", US26D, (VERIFY F REQUIRED)

HARDWARE SET #6:

3 EA. HINGES, STANLEY, FEBRA, 45 X 45, NRP,
1 EA. STOREROOM LEVER LOCK - FALCON, BROS DANE 626
1 EA. CLOSER, LCN, 404L, AL
1 EA. WALL STOP - 'ROCKWOOD', 409
3 EA. SILENCER - 'IVES', SR64, GR7

HARDWARE SET #7:

3 EA. HINGES, STANLEY, FEBRA, 45 X 45, NRP, 26D
1 EA. PANIC HARDWARE, 9L, 3", VON DURIN (VERIFY FUNCTION)
1 EA. CLOSER, LCN, 404L, AL

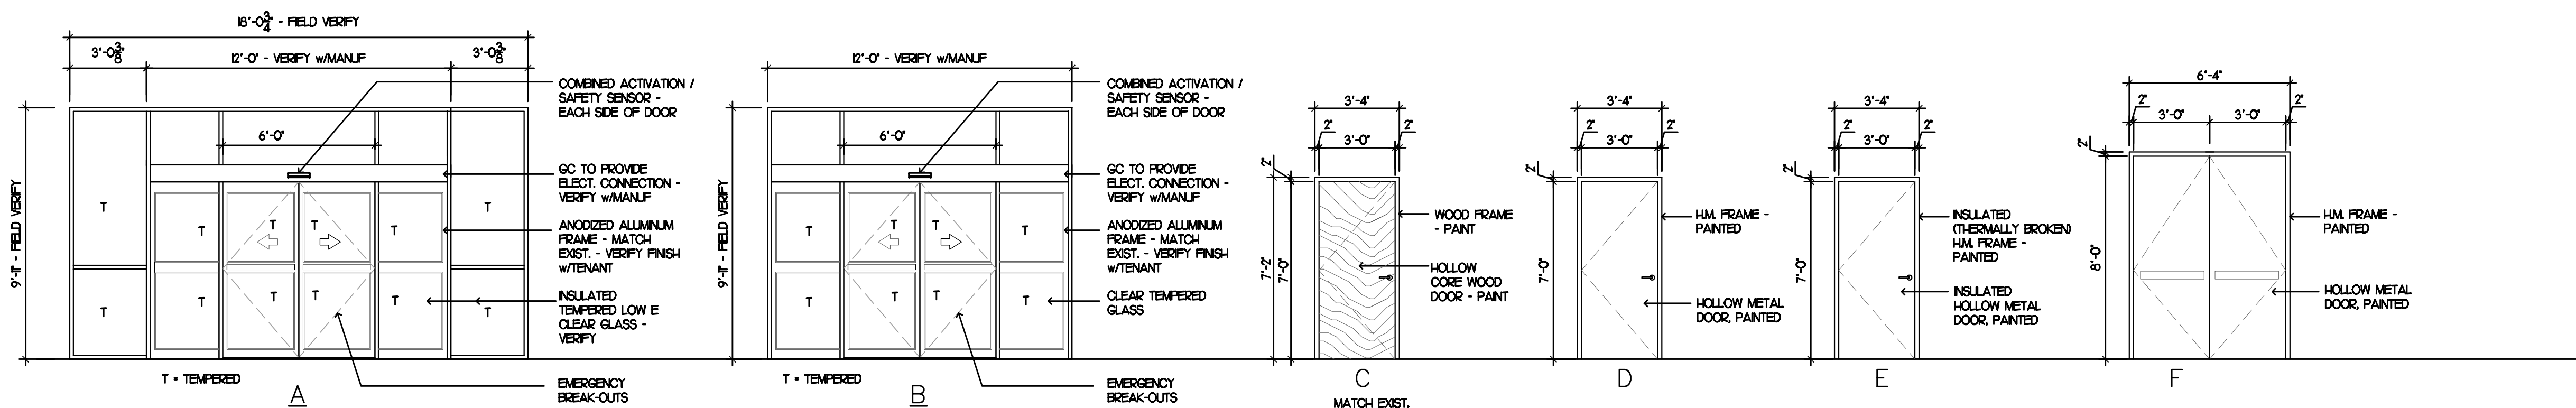

DOOR TYPES

1/4" = 1'-0"

ROOM FINISH SCHEDULE

ALL FINISHES BY TENANT
VERIFY ANY REQUIREMENTS / PREP REQUIRED

ROOM #	ROOM NAME	FLOOR FINISH	BASE FINISH	WALL FINISHES	CEILING FINISH	CEILING HEIGHT	NOTES
101	VESTIBULE	LVT	VINYL	GLASS VESTIBULE	EXIST./ NEW GYP. BD - PAINT, LATEX	9'-4" VERIFY	
102	PLANT AREA	EXISTING	EXIST.	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	
103	RETAIL AREA	EXISTING	EXIST.	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	
104	CONSIGNMENT AREA	EXISTING	VINYL	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	
105	BREAK RM	EXISTING	VINYL	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	GYP. BD - PAINT, LATEX	10'-0"	
106	EXIST. MENS	EXISTING	EXIST.	EXISTING - PATCH AS REQ. GYP. BD - PAINT, EPOXY	EXIST. GYP. BD - PAINT, EPOXY	EXIST.	
107	KIDS CLOTHING	EXISTING	EXIST.	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	
108	EXIST. WOMEN	EXISTING	EXIST.	EXISTING - PATCH AS REQ. GYP. BD - PAINT, EPOXY	EXIST. GYP. BD - PAINT, EPOXY	EXIST.	
109	EXIST. WOMEN	EXISTING	EXIST.	EXISTING - PATCH AS REQ. GYP. BD - PAINT, EPOXY	EXIST. GYP. BD - PAINT, EPOXY	EXIST.	
110	EXIST. OFFICE	OPT	VINYL	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST./ NEW GYP. BD - PAINT, LATEX	9'-4" VERIFY	
111	HALL	EXIST. CONCRETE SEAL	VINYL	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	
112	EXIST. UTILITY RM	EXIST. CONCRETE SEAL	EXIST.	EXISTING - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	
113	STORAGE RM	EXIST. CONCRETE SEAL	VINYL	EXIST./ NEW - PATCH AS REQ. GYP. BD - PAINT, LATEX	EXIST. EXP. STRUCT.	VARES	

FINISHES

ALL FINISHES BY TENANT
VERIFY ANY REQUIREMENTS / PREP REQUIRED


OPT	VERIFY MAKE, MANUF, COLOR & PATTERN w/TENANT.
LVT	VERIFY MAKE, MANUF, COLOR & PATTERN w/TENANT.
VINYL BASE	VINYL BASE SHALL BE 4" JOHNSONITE 1/8" THICK W/COVE.
FIRE EXTINGUISHER CABINETS & EXTINGUISHER (PROVIDE AS REQ.)	FIRE EXTINGUISHER CABINET SHALL BE BY J. INDUSTRIES - COSMOPOLITAN, FULL GLAZING, CLEAR TEMPERED GLASS - WITH STEEL, POWDER COAT FINISH - PAINT TO MATCH WALL COLOR. SEMI PER J. INDUSTRIES CLEAR WITH COSMIC ICE EXTINGUISHER - 10 LB CAPACITY DRY CHEMICAL.

ACCESSIBILITY WORK SCOPE

- M OCCUPANCY GOING INTO M OCCUPANCY, GC SHALL UPDATE WHATEVER IS POSSIBLE TO COMPLY W/ADA FOR ALL ACCESSORIES, MODIFY / PROVIDE PER BELOW STANDARDS WHERE POSSIBLE, PROVIDING MIN. 20% OF TOTAL COSTS FOR UPGRADE TO ADA COMPLIANCE.
- ADA TANK TYPE WATER CLOSET, SEAT HEIGHT AT 18" AFF.
- GRAB BARS BY AMERICAN SPECIALTIES, INC. SERIES 3800, OR APPROVED EQUAL, MOUNT AT 2'-0" AFF.
 O 3'-0" LONG BAR AT BACK WALL - HOLD 6" FROM CORNER
 O 3'-6" LONG BAR AT SIDE WALL - HOLD 12" FROM CORNER AND MOUNT + 25" AFF. TO CENTERLINE
 O VERTICAL GRAB BAR - MOUNT + 39" AFF. AND 39" FROM BACK WALL, GRAB BAR TO BE A MINIMUM OF 18" LONG.
- SURFACE MOUNTED LAV W/ ADA LEVER FAUCET & TUBERO HIGHER SNAP-ON DRAIN PIPE INSULATION AT EXPOSED PLUMBING ONLY.
- MIRROR - MOUNT SO THE BOTTOM EDGE OF THE REFLECTIVE SURFACE IS 40" MAX. AFF. FIELD COORDINATE. ALL MIRROR SIZES SHALL BE FIELD VERIFIED.
- SURFACE MOUNTED DUAL TOILET PAPER DISPENSER BY AMERICAN SPECIALTIES, INC. OR APPROVED EQUAL, MOUNT + 2'-0" AFF. TO CENTERLINE AND 3'-0" TO FARTHEST EDGE FROM REAR WALL.
- SANITARY NAPKIN DISPOSAL, BY AMERICAN SPECIALTIES, INC OR APPROVED EQUAL, MOUNT + 1'-8" AFF. TO CENTERLINE - (IN WOMEN'S ONLY)
- SURFACE MOUNTED ROLL PAPER TOWEL DISPENSER, MOUNT SO BOTTOM OF PAPER SLOT IS 4'-0" AFF. (MAX)
- SURFACE MOUNTED SOAP DISPENSER BY AMERICAN SPECIALTIES OR APPROVED EQUAL - MOUNT + 3'-4" AFF TO BOTTOM OF DISPENSER.
- NEW LEVER DOOR HARDWARE & SIGNAGE
- NEW HALO DRINKING FOUNTAIN
- NEW ACCESSIBLE CHECK-OUT COUNTER


GENERAL MILLWORK NOTES:

- PROVIDE ONE-PIECE FINISHED END PANELS AT ALL EXPOSED CASEWORK SIDES.
- PROVIDE CONTINUOUS BLOCKING WITHIN NEW WALLS AS REQUIRED FOR ALL WALL MOUNTED CASEWORK, FIXTURES, ACCESSORIES AND EQUIPMENT. ANCHOR BLOCKING BETWEEN STUDS, AT THE FACE OF THE STUDS, FOR THE ENTIRE WIDTH OF THE ITEM TO BE MOUNTED ON THE WALL. VERIFY VERTICAL LOCATION OF THE BLOCKING WITH THE MOUNTING HEIGHT REQUIRED AND THE REQUIREMENTS OF THE ITEM TO BE MOUNTED ON THE WALL. IF WOOD BLOCKING IS INSTALLED, USE FIRE RETARDANT LUMBER.
- PROVIDE LOCKS ON CABINETS DOORS AND/OR DRAWERS WHERE INDICATED AND AS REQUIRED BY OWNER. VERIFY LOCK REQUIREMENTS w/OWNER.
- RADIUS ALL OUTSIDE CORNERS AT COUNTERTOPS.
- PROVIDE CONTINUOUS SEALANT BEAD AT PERIMETER OF ALL COUNTERTOP EDGES - COLOR SHALL MATCH LAMINATE COLOR.
- PROVIDE WOOD FILLER STRIPS AT CABINETS AS REQUIRED. FILLER STRIPS SHALL BE MANUFACTURED BY CABINET MANUFACTURER AND SHALL MATCH CABINET FINISH.
- VERIFY ALL APPLIANCE DIMENSIONS SUPPLIED BY OWNER FOR CLEARANCE AND INSTALLATION REQUIREMENTS PRIOR TO INSTALLATION OF MILLWORK.
- SCORE ALL COUNTERTOPS TO WALLS FOR ACCURATE FIT. APPLY SEALANT CONT. @ PERIMETER EDGES - 1/8" JOINT MAXIMUM.
- EXTERIOR SURFACES & EXPOSED TO VIEW SURFACES SHALL BE FINISH SPECIFIED. INTERIOR SURFACES SHALL BE MELAMINE - UNLESS NOTED OTHERWISE.
- PROVIDE COVER CAPS OVER ALL EXPOSED SCREWS, COLOR TO MATCH ADJACENT MATERIAL.

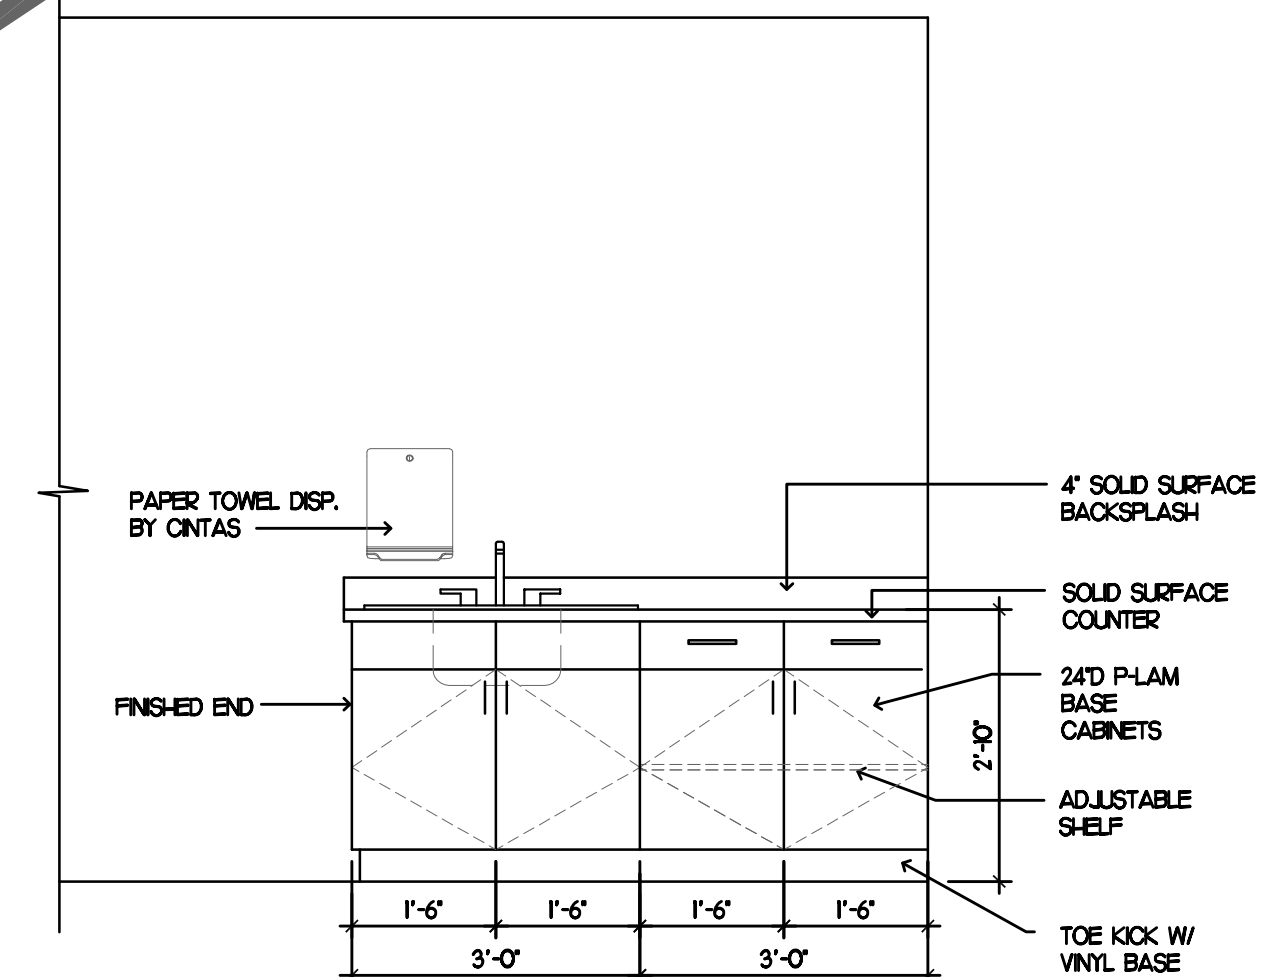

2 BREAK / HALL (RM 105)
1/2" = 1'-0"

PER ANSI A117.1 EXCEPTION #1 UNDER SINK ACCESS NOT REQ. WITH PARALLEL APPROACH AND NO RANGE IN COUNTER.

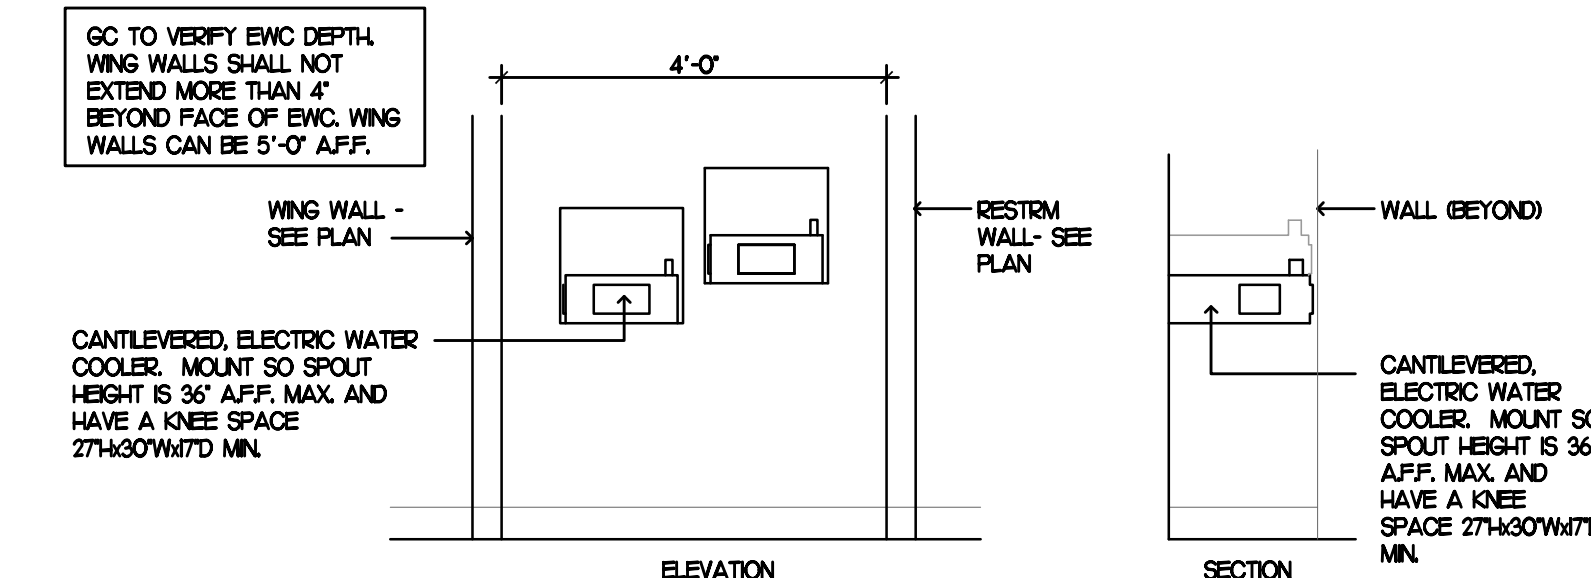

3 ELEVATION
1/2" = 1'-0"

REVISIONS/DATES		
NO.	DATE	DESCRIPTION
1	7/18/22	CITY COMMENTS

OWNER AND CONTRACTOR INDICATE AT PERIMETER OF REVISIONS AND DATE OF REVISIONS. THE REVISIONS SHALL BE MADE BY THE ARCHITECT. THE ARCHITECT SHALL BE RESPONSIBLE FOR VERIFYING THE REVISIONS. THE ARCHITECT SHALL BE RESPONSIBLE FOR VERIFYING THE REVISIONS. THE ARCHITECT SHALL BE RESPONSIBLE FOR VERIFYING THE REVISIONS.

ECO THRIFT - TENANT FINISH
9717 Q STREET
OMAHA, NEBRASKA

CREATE • BUILD • ENHANCE

GRID ARCHITECTURE, LLC
T. (402) 966-9825
F. (866) 445-7821

ARCHITECT
STATE OF NEBRASKA
4-1103
07/18/22

A1.2
SCHEDULES & INTERIOR ELEVATIONS