DOOR/WINDOW SCHEDULE

NO.	SIZE	DOOR/WINDOW				FRAME			HARDWARE									NOTES
		ELEV.	MATERIAL	LABEL	FINISH	MATERIAL	ELEV	FINISH	LOCKSET	PASSAGE SET	PRIVACY SET	PUSH/PULL	PANIC SET	DBL. ACTING HINGE	H/C CLOSER	STOP		
EX	EXISTING TO REMAIN	---	---	---	---	---	---	---										---
102	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT	●							●		---
103	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT			●				●	●		---
104	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT			●				●	●		---
107	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT	●							●		---
202	(2) 3'-0" X 7'-0" X 1 3/4"	D-2	SCWD	---	PNT	HM	F-2	PNT		●						●		---
203	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT			●				●	●		---
204	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT			●				●	●		---
205	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT	●							●		---
206A	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT		●						●		---
206B	3'-0" X 7'-0" X 1 3/4"	D-1	SCWD	---	PNT	HM	F-1	PNT		●						●		---
207	(2) 3'-0" X 7'-0" X 1 3/4"	D-2	SCWD	---	PNT	HM	F-2	PNT	●							●		---

DOOR/WINDOW SCHEDULE NOTES:

1. ALL DOORS TO BE INSTALLED IN ACCORDANCE WITH SECTION 1008.1 NORTH CAROLINA BUILDING CODE. LOCKING DEVICES SHALL COMPLY WITH SECTION 1008.1.8.3. PANIC DEVICES SHALL COMPLY WITH SECTION 1008.1.9.

2. ALL DOORS TO BE INSTALLED IN ACCORDANCE WITH CHAPTER 11 AND ANSI 117.1-03 OF THE INTERNATIONAL BUILDING CODE. DOOR CLOSERS SHALL COMPLY WITH SECTIONS 7.6 AND 7.7. DOOR THRESHOLDS SHALL COMPLY WITH SECTION 7.8. DOOR HARDWARE SHALL COMPLY WITH SECTION 7.9.

ABBREVIATIONS

XX	DOOR TAG
GL	GLASS
HM	HOLLOW METAL
PT	PAINT
SCWD	SOLID CORE WOOD DOOR
ST	STAIN
AL	ALLUMINUM STORE FRONT

WALL LEGEND

	EXISTING WALLS TO REMAIN
	NEW WALL
	DEMO WALL
#	NEW WALL TYPE
EX	EXISTING WALL TYPE

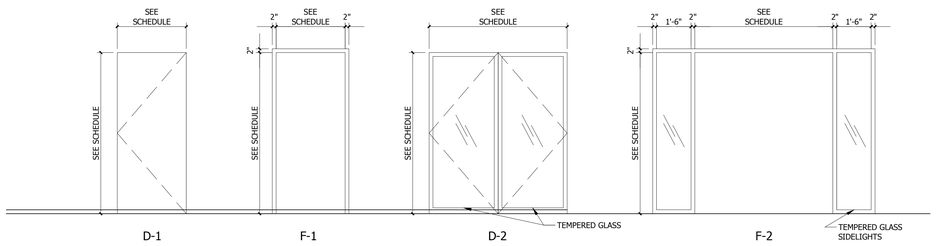

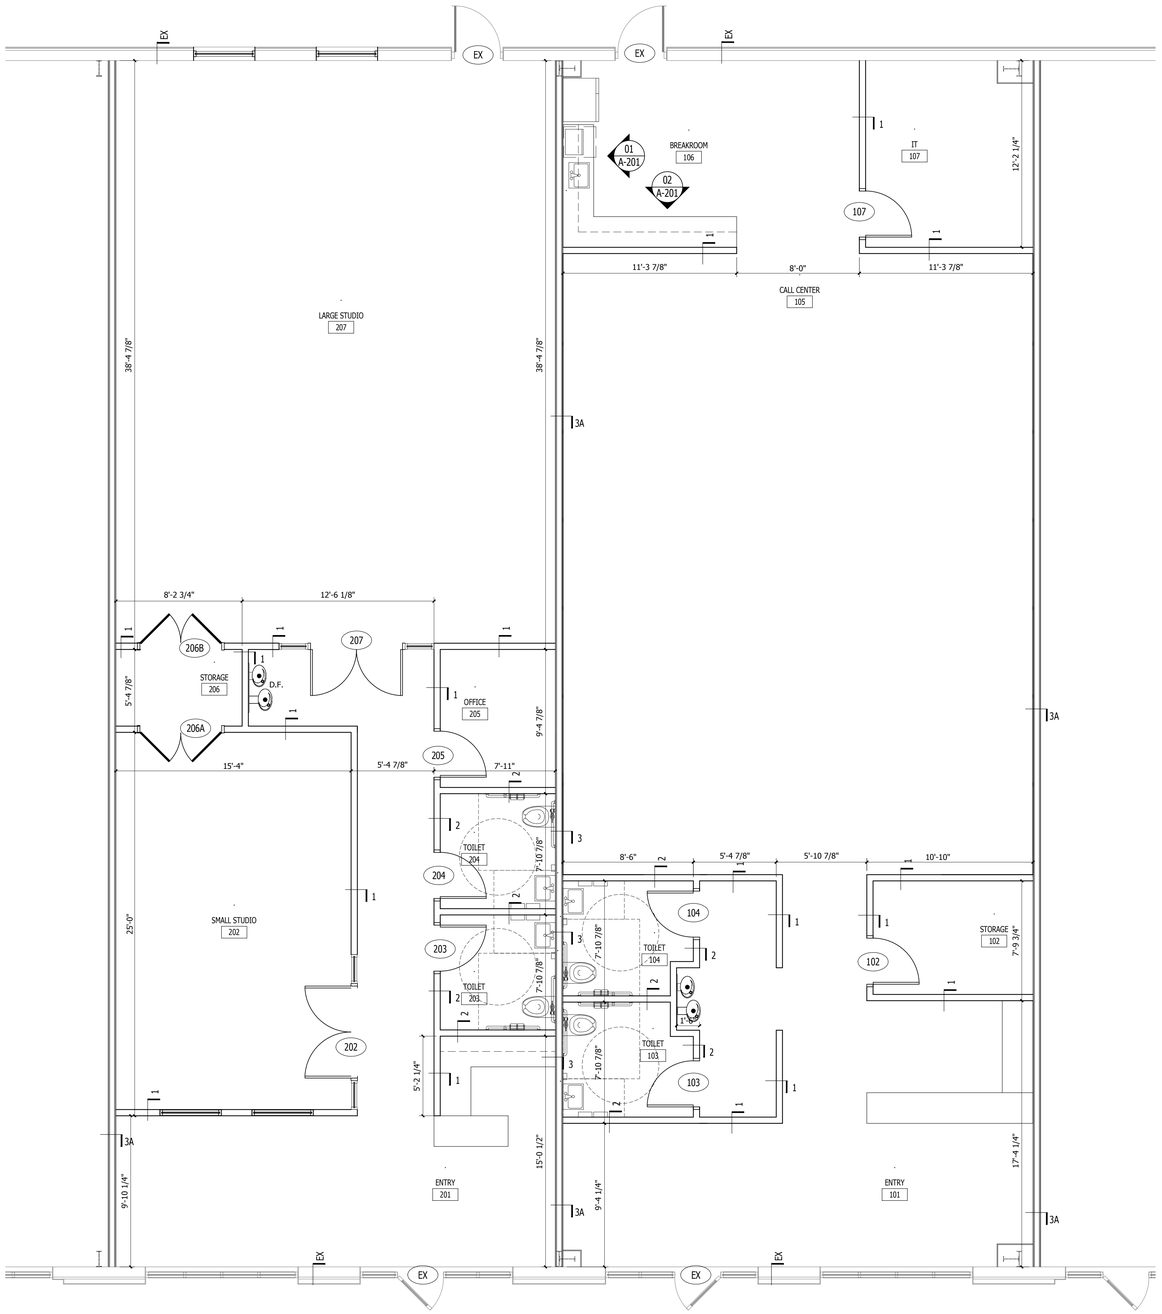

TYPICAL HEAD & JAMB DETAILS



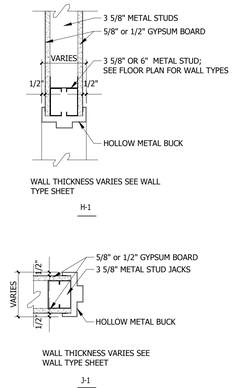

03 WALL TYPE 3 — scale: 1 1/2"=1'-0"

05 TYP. DETAILS — scale: 1 1/2"=1'-0"





02 WALL TYPE 2 — scale: 1 1/2"=1'-0"

01 WALL TYPE 1 — scale: 1 1/2"=1'-0"

01 FLOOR PLAN — scale: 1/4"=1'-0"

ODa
overcash demmitt
2010 south tryon st. suite 1a
charlotte north carolina 28203
office.704.332.1615
web.www.odarch.com

STATE OF SOUTH CAROLINA — STEPHEN F. OVERCASH — CHARLOTTE, N. C. — 3864 — REGISTERED ARCHITECT

07.05.2017

160 FLEX SPACE
TENANT UPFITS
FORT MILL, SOUTH CAROLINA

ODA Project No. 173180

REVISIONS

No.	Description	Date
	FOR CONSTRUCTION	7.05.2017

FLOOR PLAN,
WALL TYPES,
DOOR SCHEDULE

A-101

Copyright 2016 Overcash Demmitt Architects