



- REVISIONS**
1. Silt fence
 2. Construction entrance - utilize existing asphalt drive approach
 3. Construction entrance limit, site is amended.
 4. Silt fence protection - street grade on top of catch basin, top of catch basin on top of a separating wall during construction, construction shall keep silt fence from sidewalk.

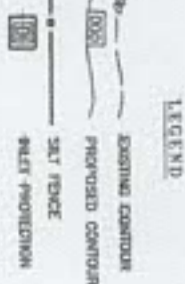

INLET PROTECTION IN SWALES/DITCH LINES OR YARD INLETS

1. THE PROPOSED SILT FENCE SHALL BE CONSTRUCTED USING THE FOLLOWING METHOD: A. THE SILT FENCE SHALL BE CONSTRUCTED USING 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH. B. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. C. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. D. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. E. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. F. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. G. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. H. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. I. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. J. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. K. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. L. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. M. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. N. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. O. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. P. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. Q. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. R. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. S. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. T. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. U. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. V. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. W. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. X. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. Y. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. Z. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT.

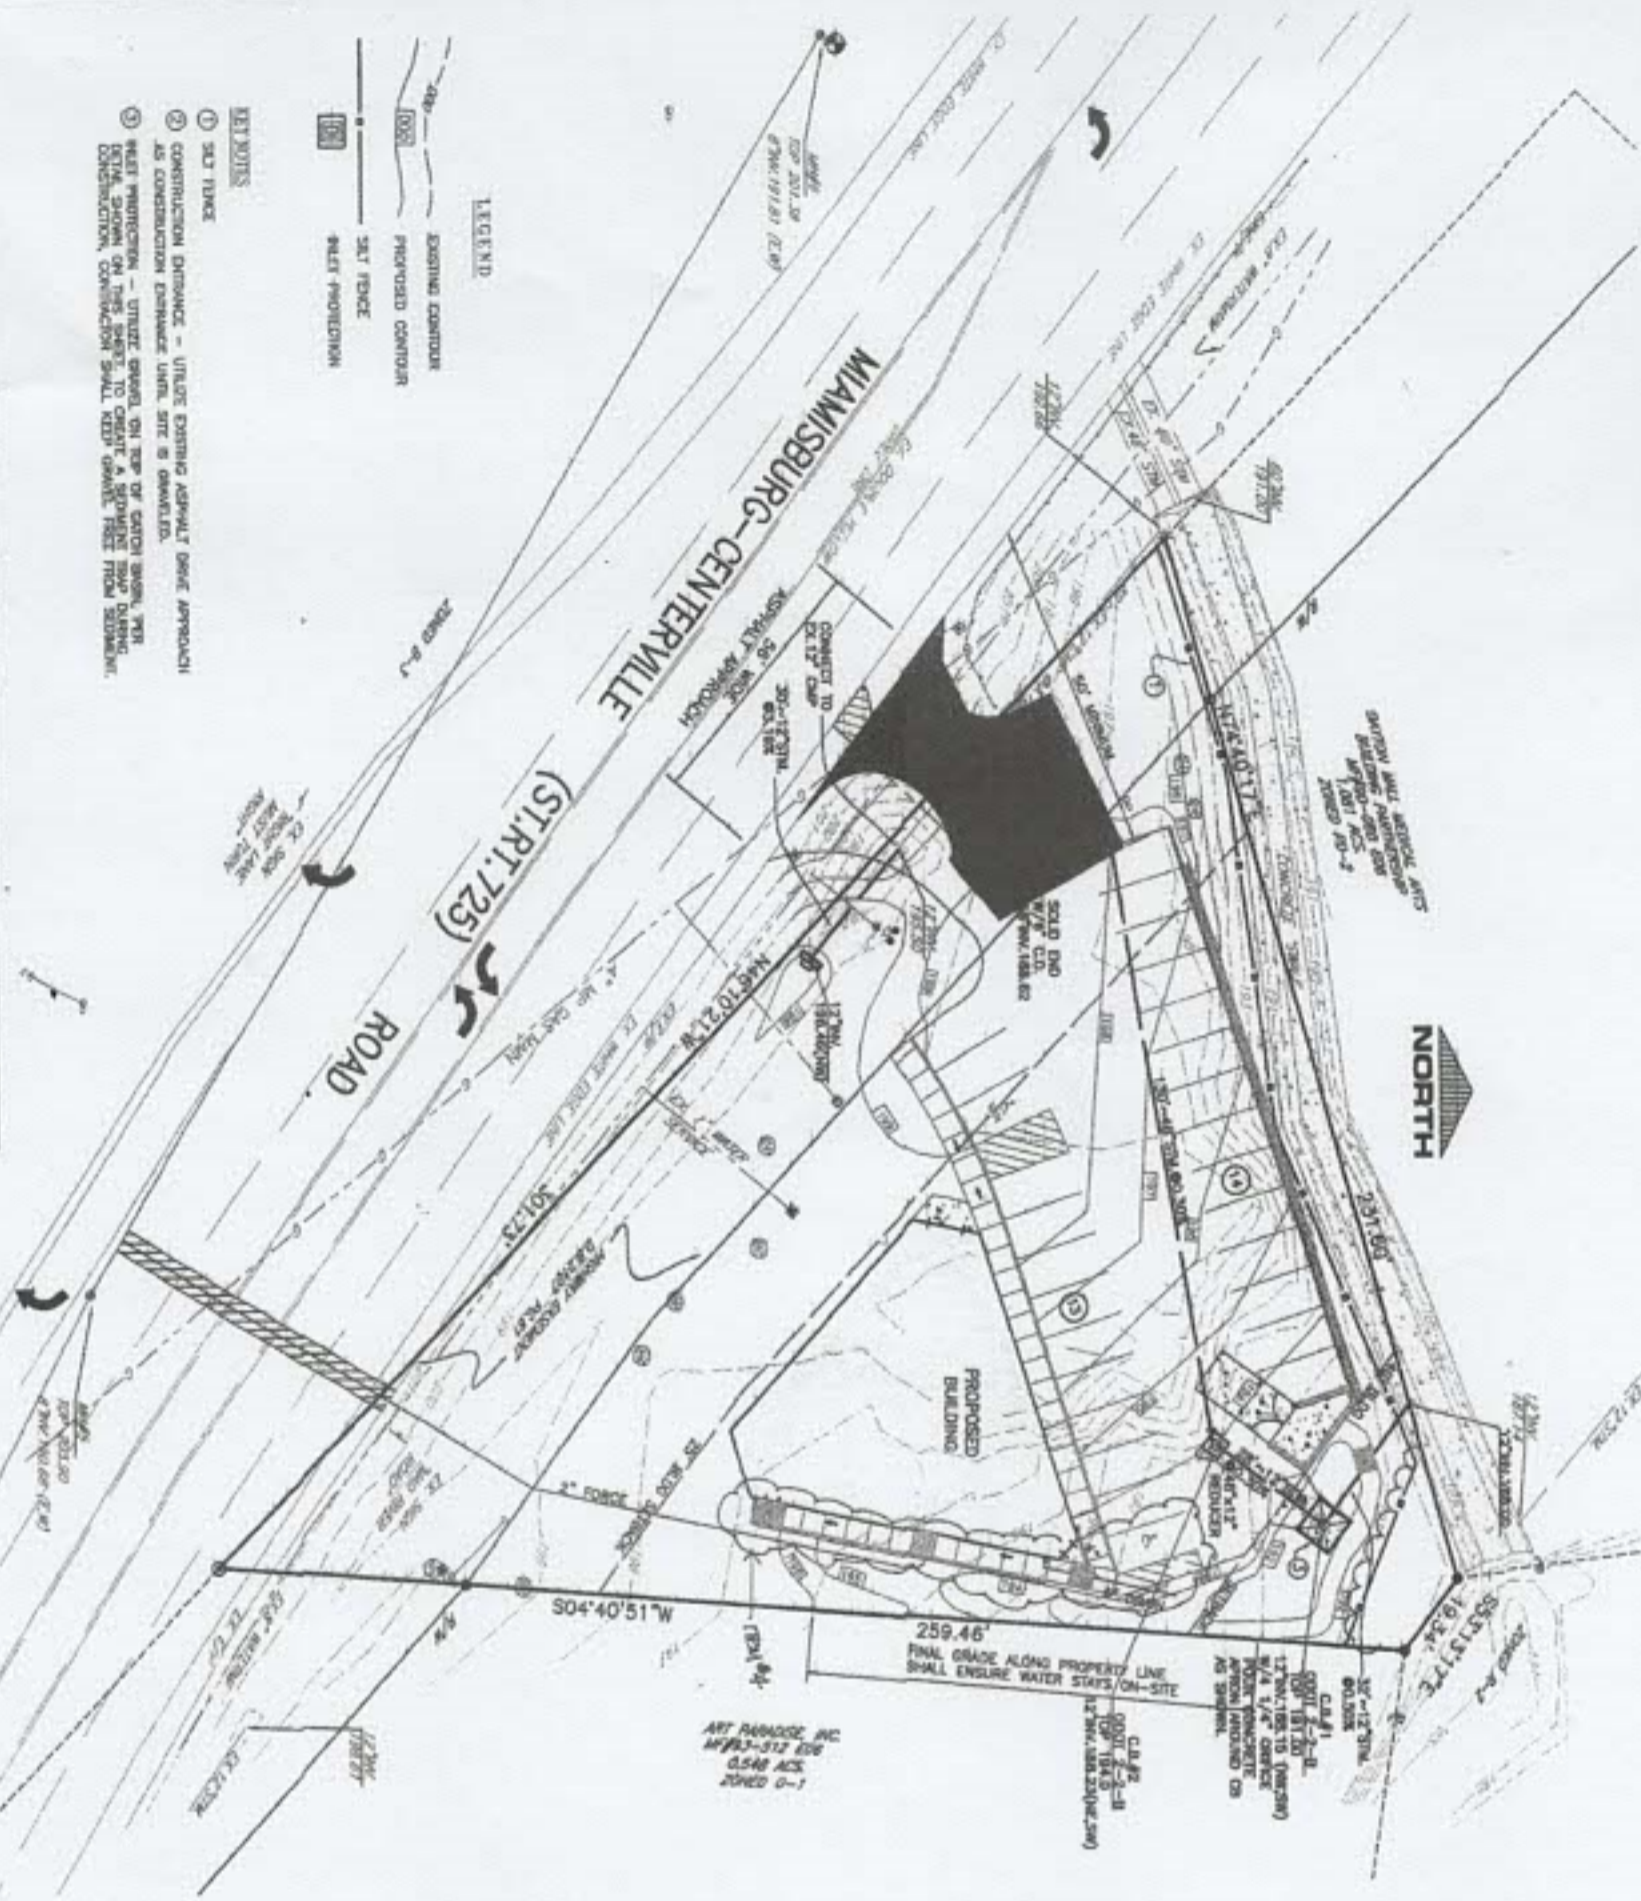


FINAL GRADE ALONG PROPERTY LINE SHALL ENSURE WATER STAYS ON-SITE


ART PARADISE, INC. 4745-512 EDE 0548 ACX ZONED G-1

EROSION CONTROL NOTES

1. All silt fences shall be installed concurrent with the start up of grading and/or earth retaining activities.
2. Silt fence shall be installed to a depth within 7' depth of existing final grade as shown indicated or to a depth to reach demand for more than 48' depth.
3. Temporary erosion control facilities shall (a) be located, installed, and maintained to the maximum extent possible to prevent erosion or sedimentation on the site.
4. Silt fence shall be maintained in accordance with local specifications.
5. Silt fence shall be maintained in accordance with local specifications.
6. Silt fence shall be maintained in accordance with local specifications.
7. Silt fence shall be maintained in accordance with local specifications.
8. Silt fence shall be maintained in accordance with local specifications.
9. Silt fence shall be maintained in accordance with local specifications.
10. Silt fence shall be maintained in accordance with local specifications.

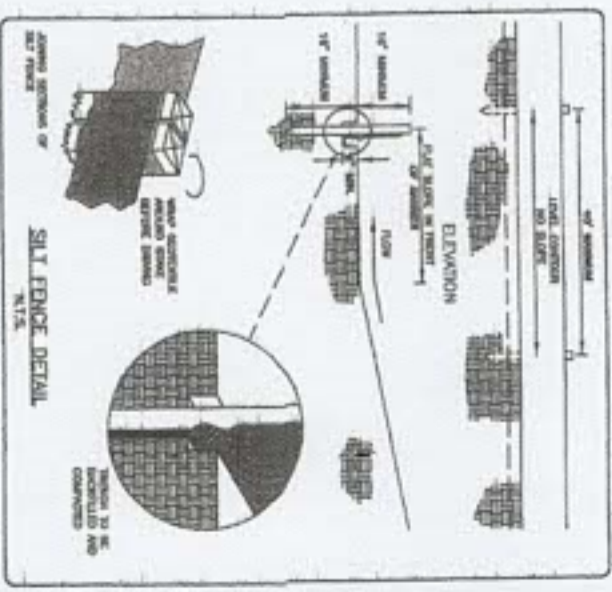

1. THE SILT FENCE SHALL BE CONSTRUCTED USING THE FOLLOWING METHOD: A. THE SILT FENCE SHALL BE CONSTRUCTED USING 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH. B. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. C. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. D. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. E. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. F. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. G. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. H. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. I. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. J. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. K. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. L. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. M. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. N. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. O. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. P. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. Q. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. R. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. S. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. T. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. U. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. V. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. W. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. X. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. Y. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT. Z. THE SILT FENCE SHALL BE CONSTRUCTED USING A 12" DIA. GRAVEL AND 1/2" DIA. WIRE MESH DROP INLET SEDIMENT.

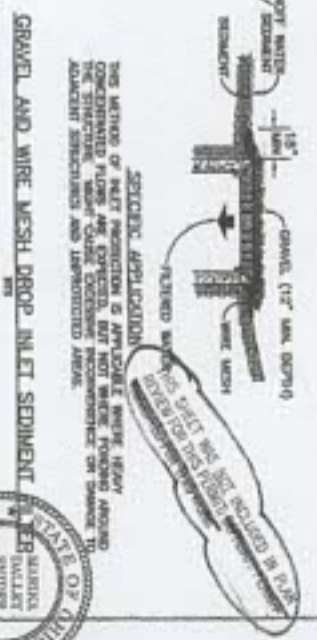

CONTACT INFORMATION:
STATE OF OHIO
DEPARTMENT OF PUBLIC SAFETY
DIVISION OF PROFESSIONAL ENGINEERS
1675 EAST 12TH AVE
COLUMBUS, OH 43260
TEL: 614-467-3333

SITE BENCHMARK:
B. INVERT OF EXISTING SANITARY MANHOLE
LOCATED ON SOUTH SIDE OF ST. JEFF. 725
APPROX. 36' WEST OF THE WEST PROPERTY
LINE.
ELEVATION = 101.81
(REF. DATUM FROM ASSOCIATED SEWER SHEET
NO. 602/1520 ELEV. 4934.07)



1. STOPPING DATE
DATE: FEB. 08, 2008
TEL. NO. 800-362-2764
AND OTHER CONTACT INFO

