



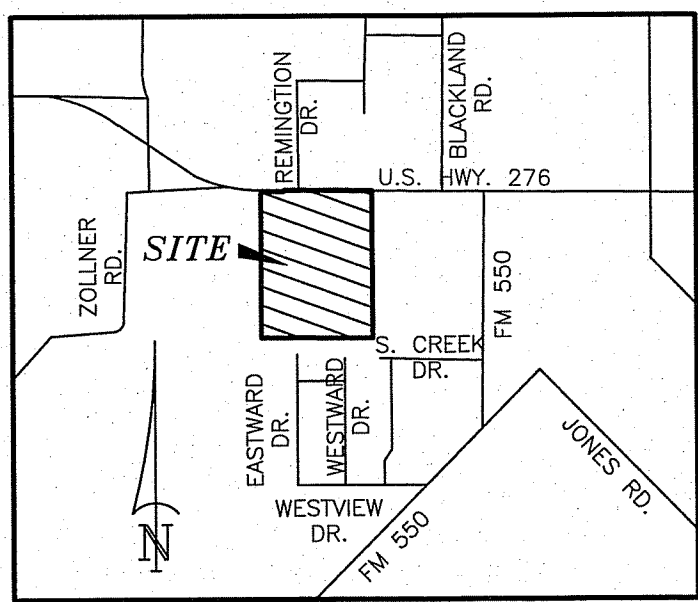

VICINITY MAP
NOT TO SCALE

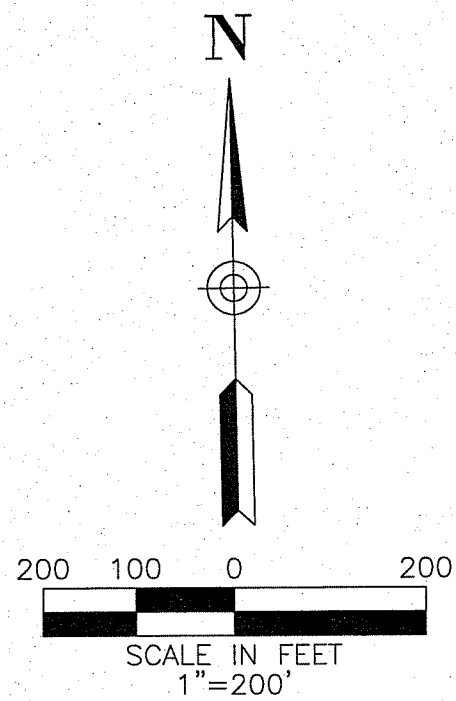

The Basis of Bearings is from the Texas State Plane Coordinate System, NAD83, North Central Zone as derived from GPS observations using the Allterra RTK Network and adjusted to surface using a surface scale factor of 1.000146135


LEGEND	
	BOUNDARY LINE
	ADJOINER BOUNDARY LINE
	EASEMENT LINE (AS NOTED)
	WATER LINE
	OVERHEAD ELECTRIC LINE
	WROUGHT IRON FENCE
	WOOD FENCE
	SET IRON ROD (AS NOTED)
	FOUND IRON ROD (AS NOTED)
	"X" CUT FOUND
	"X" CUT SET
	WATER VALVE
	FIRE HYDRANT
	TELEPHONE JUNCTION BOX
	LIGHT POLE
	POWER POLE
	GUY WIRE
	CONTROL MONUMENT
O.P.R.R.C.T.	OFFICIAL PUBLIC RECORDS ROCKWALL COUNTY, TEXAS
D.R.R.C.T.	DEED RECORDS ROCKWALL COUNTY, TEXAS

FLOOD NOTES

A portion of the subject property shown hereon lies within Zone "A", No Base Flood Elevations determined, the rest lies within Zone "X", (areas determined to be outside of the 0.2% annual chance floodplain), according to the Flood Insurance Rate Map, Community Panel No. 48397C006SL, dated September 26, 2008.

GENERAL NOTES

- This survey was prepared in conjunction with the Title Commitment listed above and the Surveyor has performed no additional research for easements, restrictions or other matters of record which may affect the land that were not disclosed in said Title Commitment.
- A request for water, sewer and drainage plans were requested from the City of Royse City but no plans were received.

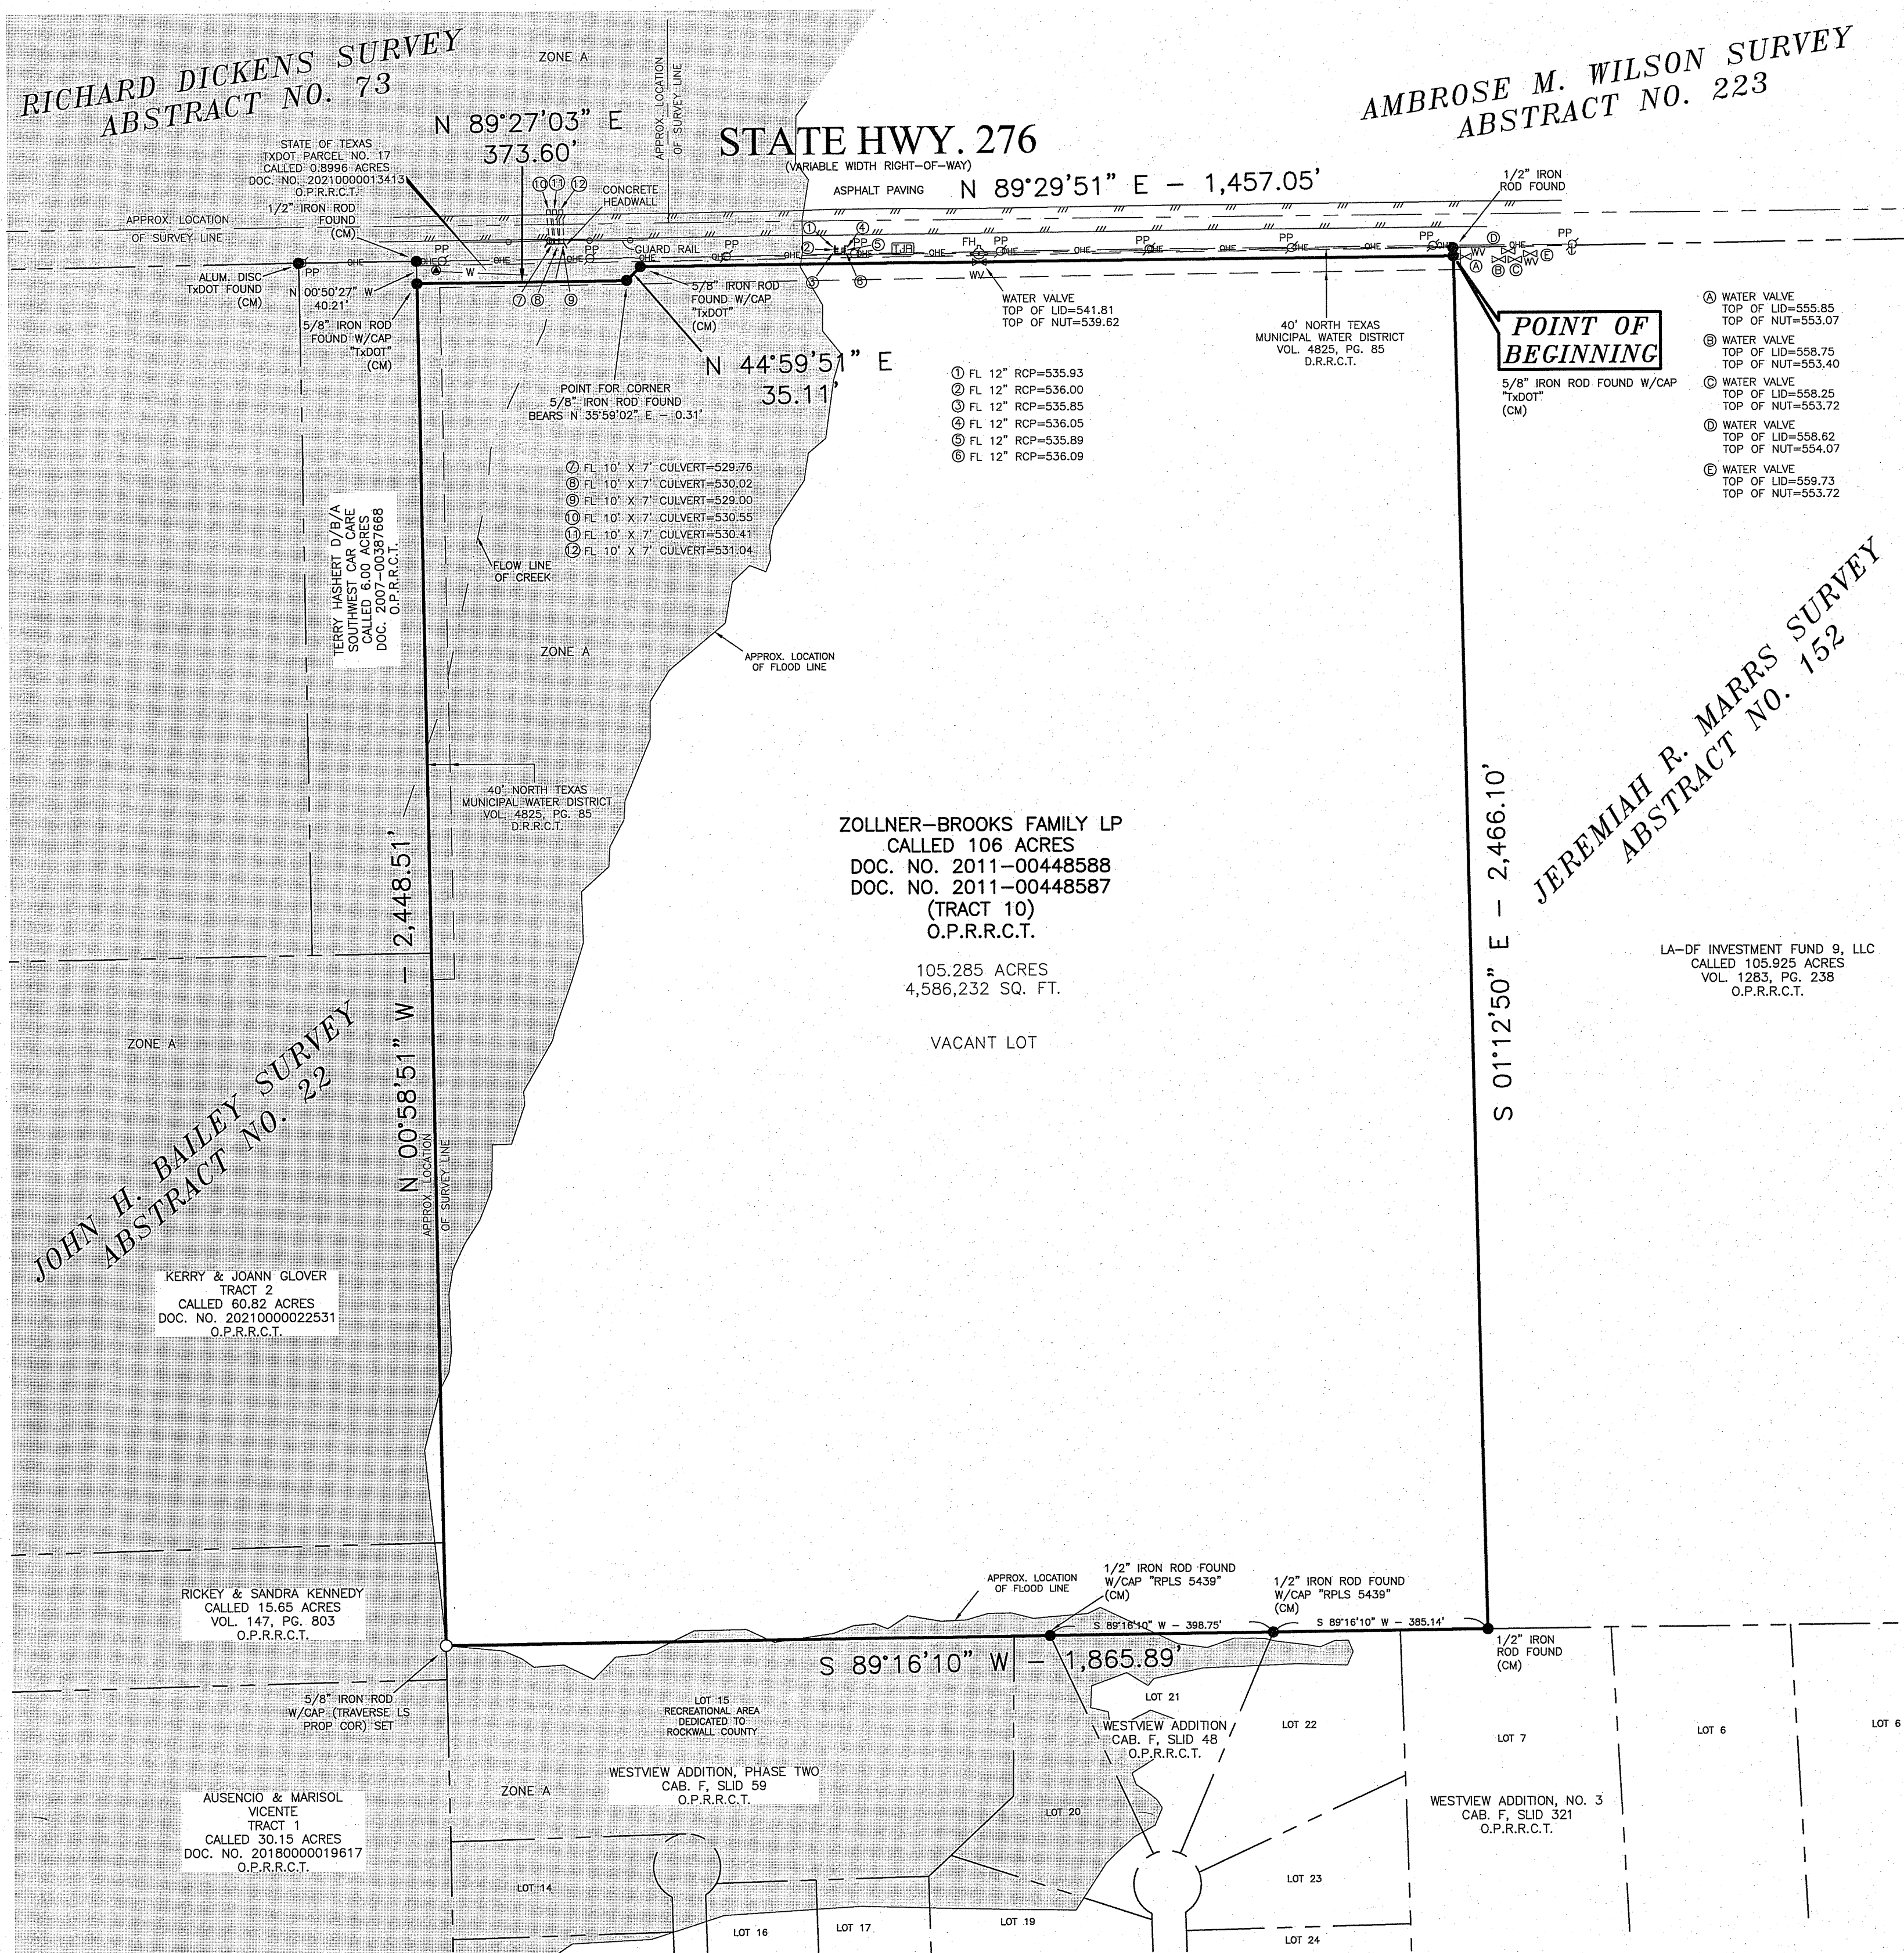

TITLE NOTES

This survey relies solely on the Commitment for Title Insurance prepared by Chicago Title Insurance Company, Commitment No. 8058642200083 and GF No. CTRR64-8058642200083-RR, with an effective date of June 15, 2022 and issued on July 6, 2022. The surveyor has performed no additional research for easements, restrictions or other matters of record which may affect the land.

10. The following matters and all terms of the documents creating or offering evidence of the matters:

- f. Easement(s) and rights incidental thereto, as granted in a document:

Granted to: Seaway Pipeline Inc.
Purpose: As provided in said document
Recording Date: January 21, 1985
Recording No: Volume 217, Page 269 Deed Records, Rockwall County, Texas
(does not affect the subject tract)

- g. Easement(s) and rights incidental thereto, as granted in a document:

Granted to: Phillips Texas Border Pipeline Company f/k/a/ Phillips Natural Gas Company
Purpose: As provided in said document
Recording Date: February 1, 1994
Recording No: Volume 869, Page 1, Deed Records, Rockwall County, Texas
(does not affect the subject tract)

- h. Easement(s) and rights incidental thereto, as granted in a document:

Granted to: North Texas Municipal Water District
Purpose: As provided in said document
Recording Date: November 14, 2006
Recording No: Volume 4825, Page 85, Deed Records, Rockwall County, Texas
(affects subject tract as shown on survey)

LAND DESCRIPTION

Being a 105.285 acre tract of land situated in the Jeremiah R. Marrs Survey, Abstract No. 152, City of Royse City, Rockwall County, Texas, being all of a tract of land conveyed to Zollner-Brooks Family, LP, a Texas limited partnership, by Warranty Deed Without Title Examination, recorded in Document No. 2011-00448588 and Document No. 2011-00448587, of the Official Public Records of Rockwall County, Texas (O.P.R.R.C.T.), and being more particularly described as follows:

BEGINNING at a 5/8 inch iron rod with cap stamped "TxDOT" (controlling monument (CM)) found on the northeasterly corner of said Zollner tract, being on the southerly right-of-way line of State Highway 276 (a variable width right-of-way) and being on the westerly line of a tract of land conveyed to LA-DF Investment Fund 9, LLC, by Special Warranty Deed, recorded in Volume 1283, Page 238, O.P.R.R.C.T.;

THENCE South 01 degrees 12 minutes 50 seconds East, along the common easterly line of said Zollner tract and the westerly line said LA-DF tract, a distance of 2,466.10 feet to a 1/2 inch iron rod (CM) found on the common southeasterly corner of said Zollner tract and the southwesterly corner of said LA-DF Investment Fund, said iron rod also being on the northerly line of Lot 7, of Westview Addition, No. 3, an addition to the City of Royse City, Rockwall County, Texas, according to the plat thereof recorded in Cabinet F, Slide 321, O.P.R.R.C.T.

THENCE South 89 degrees 16 minutes 10 seconds West, along the common southerly line of said Zollner tract, the northerly line of said Lot 7, Westview Addition, No. 3 plat, the northerly line of Lots 20-22, of Westview Addition, an addition to the City of Royse City, Rockwall County, Texas, according to the plat thereof recorded in Cabinet F, Slide 48, O.P.R.R.C.T. and the northerly line of Lot 15, of Westview Addition, Phase Two, an addition to the City of Royse City, Rockwall County, Texas, according to the plat thereof recorded in Cabinet F, Slide 59, O.P.R.R.C.T., a distance of 1,865.89 feet to a 5/8 inch iron rod with cap stamped "TxDOT" set on the common southwesterly corner of said Zollner tract, and the northwesterly corner of said Lot 15, said iron rod set also being on the easterly line of a tract of land conveyed to Rickey Edmond Kennedy and wife, Sandra Ann Kennedy, by Warranty Deed With Vendor's Lien, recorded in Volume 147, Page 803, O.P.R.R.C.T.;

THENCE North 00 degrees 58 minutes 51 Seconds West, along the common westerly line of said Zollner tract, and the easterly line of said the Kennedy tract, the easterly line of a tract of land conveyed to Kerry C. Glover and Joann Glover, by General Warranty Deed, recorded in Document No. 2021000022631, O.P.R.R.C.T. and the easterly line of a tract of land conveyed to Terry Hashert db/a Southwest Car Care, by Warranty Deed With Vendor's Lien, recorded in Document No. 2007-00387668, O.P.R.R.C.T., a distance of 2,448.51 feet to a 5/8 inch iron rod with cap stamped "TxDOT" (CM) found for corner;

THENCE departing said Terry Hashert tract and along the common northerly line of said Zollner tract and the southerly right-of-way line of said State Highway 276 the following three (3) calls:

- North 89 degrees 27 minutes 03 seconds East, a distance of 373.60 feet to a point for corner from which a 5/8 inch iron rod found bears at North 35 degrees 59 minutes 02 seconds East - 0.31';
- North 44 degrees 59 minutes 51 seconds East, a distance of 35.11 feet to a 5/8 inch iron rod with cap stamped "TxDOT" (CM);
- North 89 degrees 29 minutes 51 seconds East, a distance of 1,457.05 feet to the **POINT OF BEGINNING** and containing 105.285 acres of land (4,586,232 square feet), more or less.

SURVEYOR'S CERTIFICATION

To: Dreamland Realty, Zollner-Brooks Family, LP, a Texas limited partnership and Chicago Title Insurance Company

This is to certify that this map or plat and the survey on which it is based were made in accordance with the 2021 Minimum Standard Detail Requirements for ALTA/NSPS Land Title Surveys, jointly established and adopted by ALTA and NSPS and includes Items 1-4, 8, 11(a), 13, 14 in conjunction with the laws of the State of Texas.
The fieldwork was completed on September 7, 2022.

Date of Plat or Map: September 14, 2022

Chase Crawford
Registered Professional Land Surveyor
Texas Registration No. 6913
Date: September 14, 2022



ALTA/NSPS LAND TITLE SURVEY

105.285 ACRE TRACT OF LAND
SITUATED IN THE
JEREMIAH R. MARRS SURVEY, ABSTRACT NO. 152
CITY OF ROYSE CITY, ROCKWALL COUNTY, TEXAS



Surveying | Construction Staking | Platting

DRAWN	CHECK	DATE	SCALE	PROJECT NO.
DV	CRC	9-14-2022	1" = 200'	TR-99-22