


NUMBER 15 ENTERTAINMENT VENUE

121 West Main St
Louisville, KY 40202



CONSTRUCTION REFERENCE SET
04.19.2022

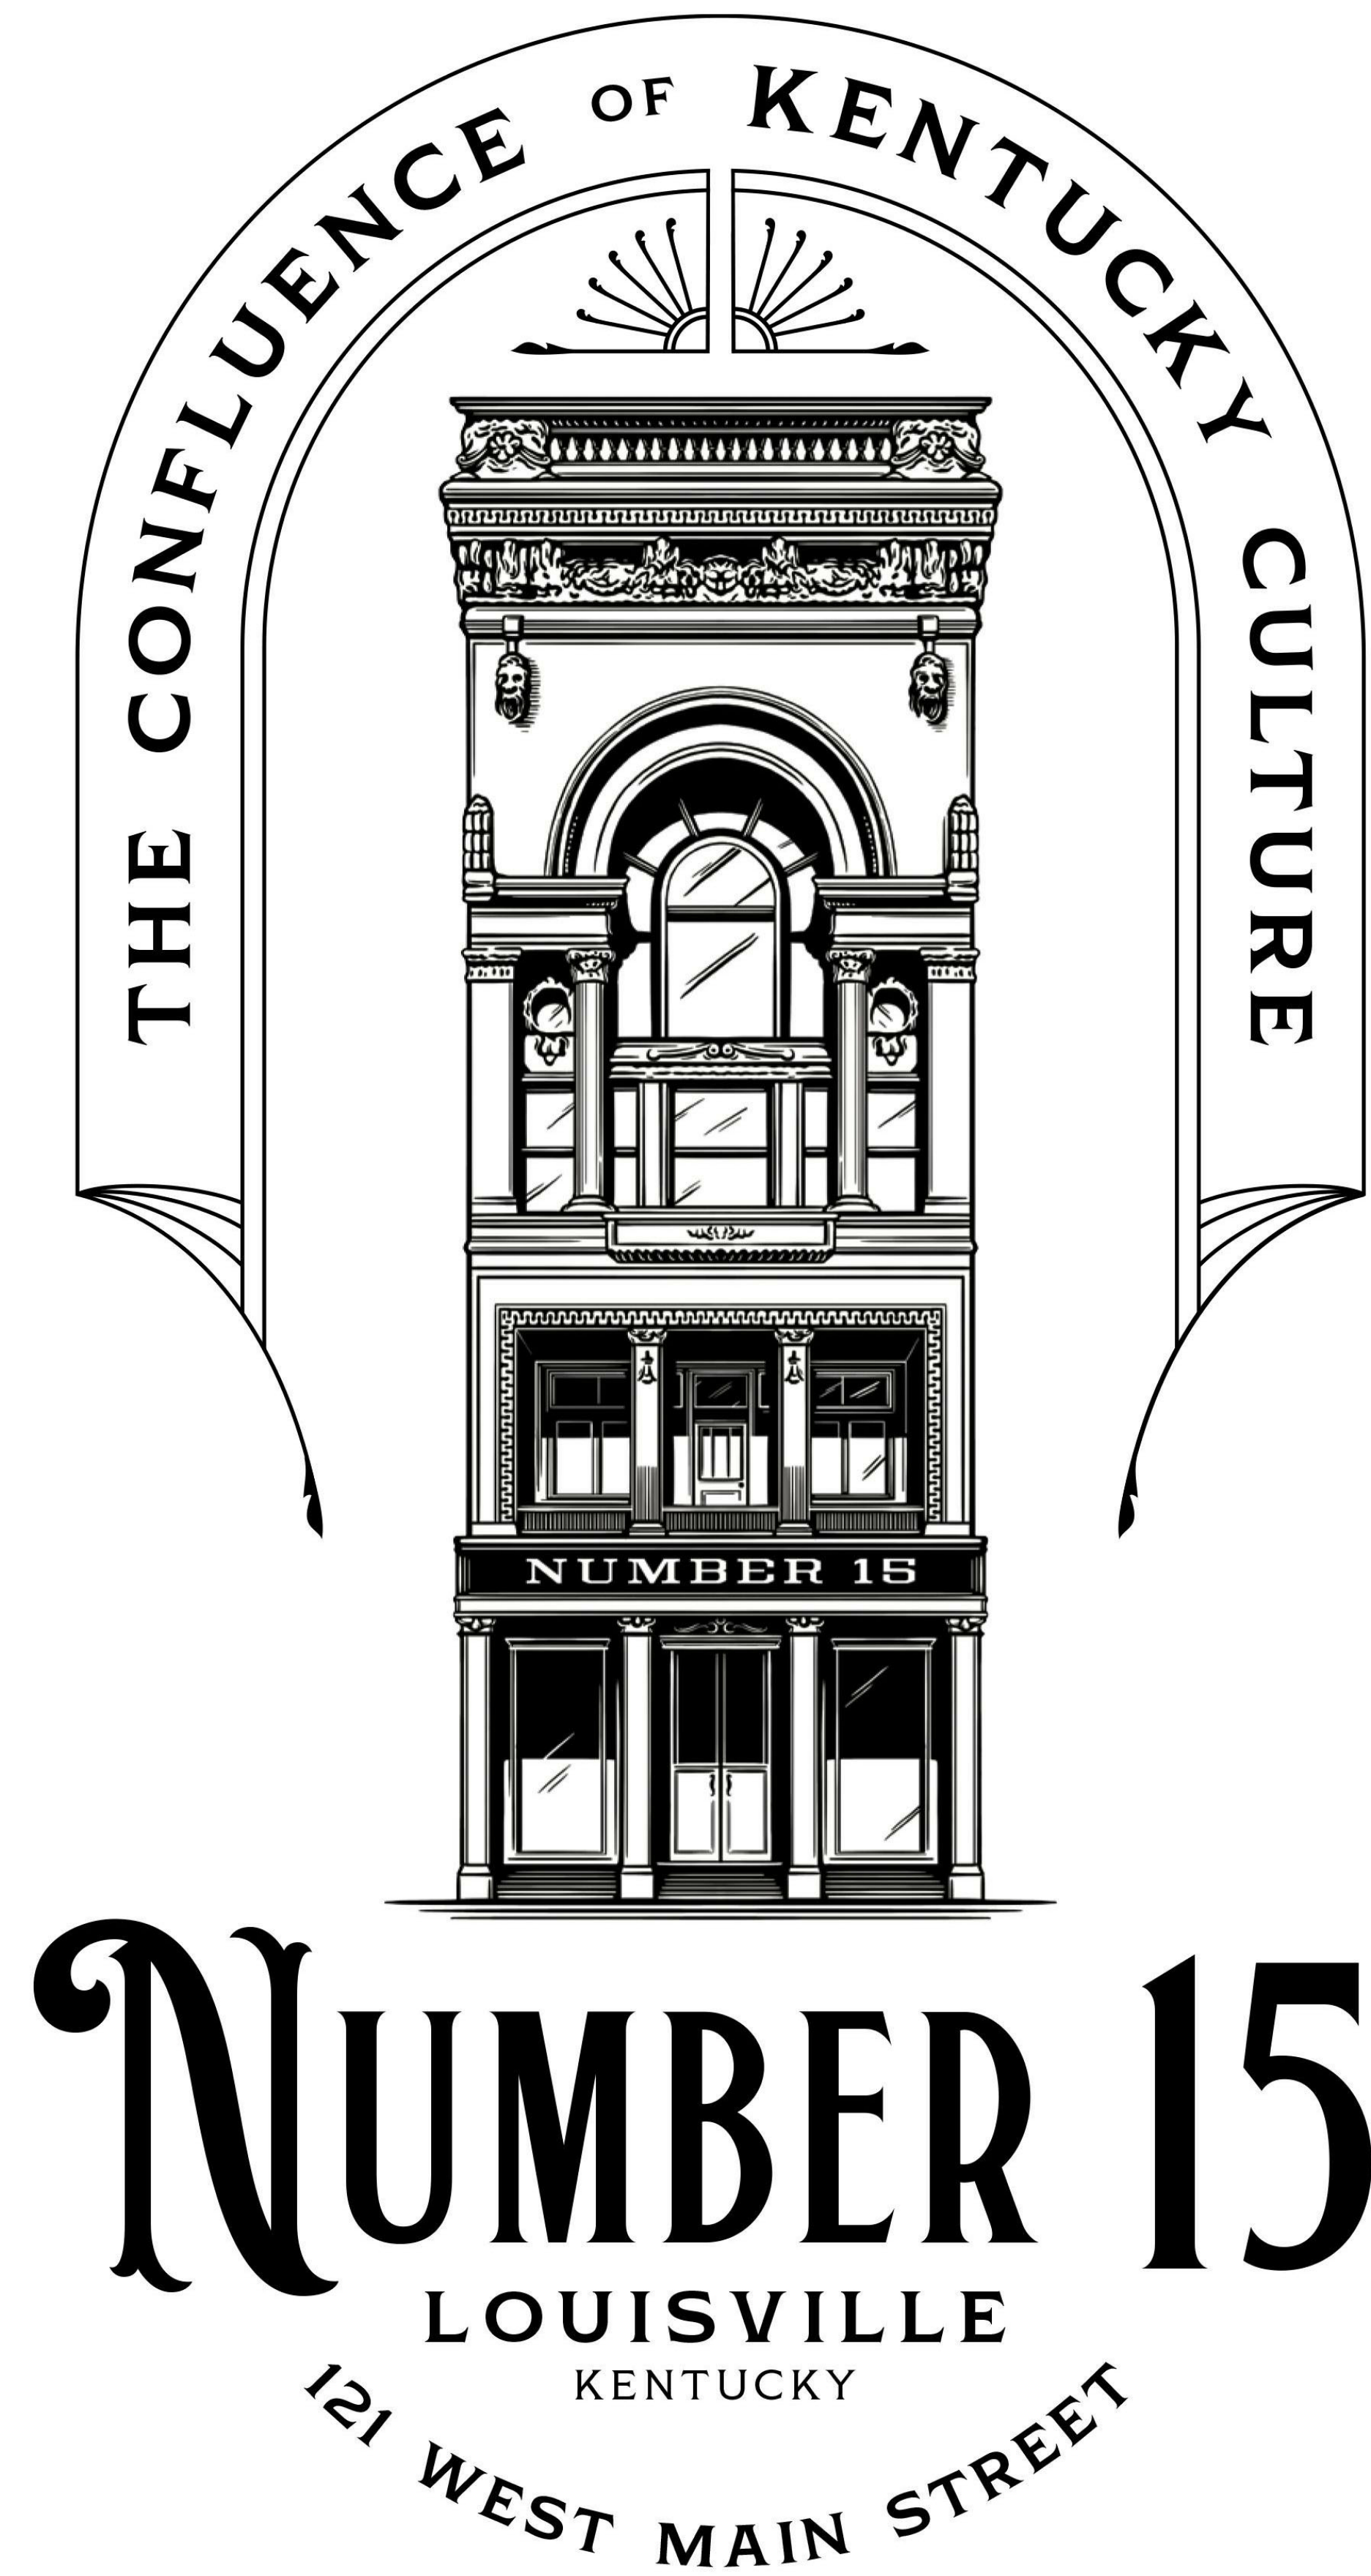

OWNER:

THE NUMBERS HOLDING COMPANY

3560 CHESTNUT PLACE
DENVER, COLORADO 80216
P: 303.493.6651
www.numberthirtyeight.com

ARCHITECT:

DKGR LLC

10 W MARKET STREET, SUITE 800
INDIANAPOLIS, IN 46204
P: 317.614.0053
www.dkgr.com

CIVIL ENGINEER:

LAND DESIGN & DEVELOPMENT

503 WASHBURN AVENUE
SUITE 100
LOUISVILLE, KY 40202
P: 502.426.9374
www.ldd-inc.com/

STRUCTURAL ENGINEER:

KPFF

125 S. 6TH STREET
SUITE 200
LOUISVILLE, KY 40202
P: 502.325.0100
www.kpff.com



MEP ENGINEER:

CIRCLE DESIGN GROUP

9229 DELEGATES ROW
SUITE 150
INDIANAPOLIS, IN 46240
www.circledesigngroup.com

PLAN KEY

BUILDING KEY

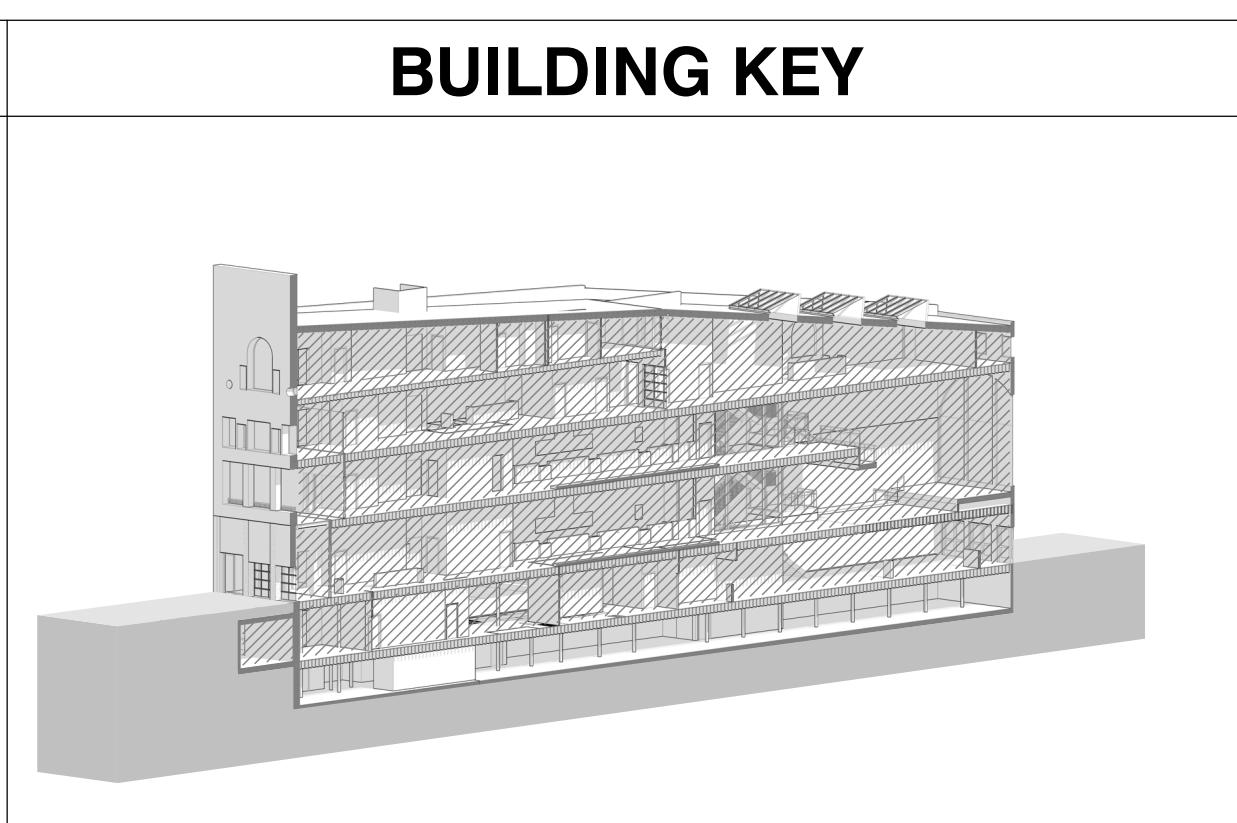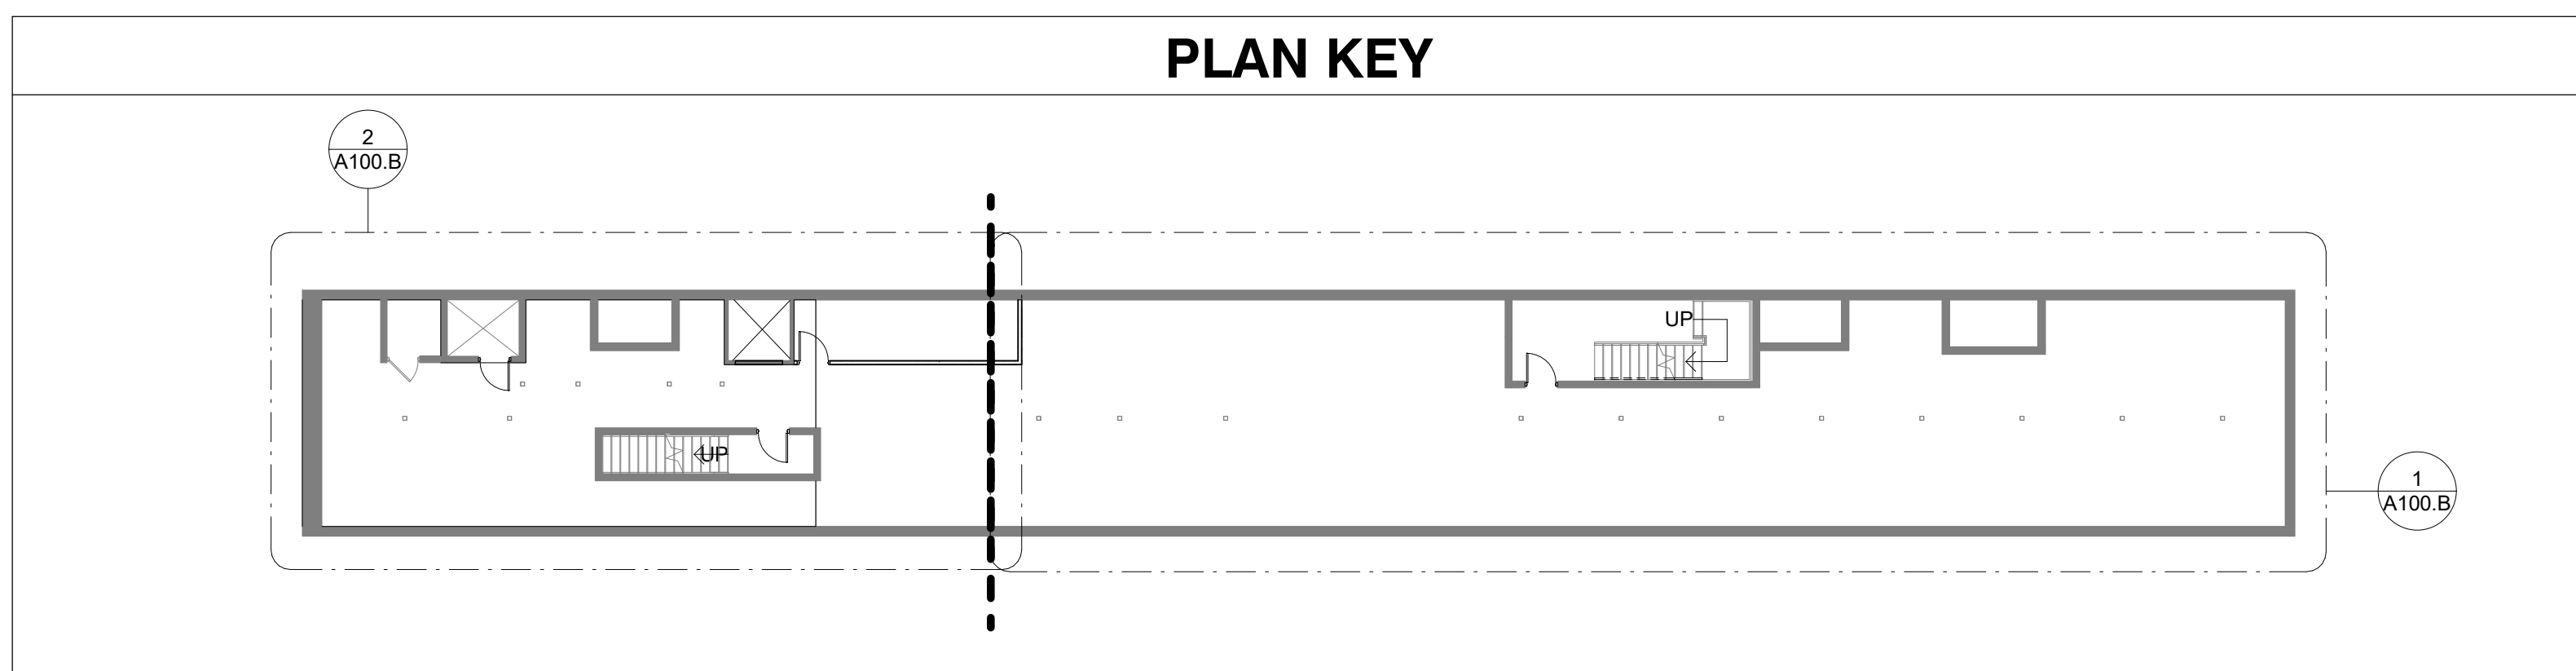

GENERAL PLAN NOTES

- EXISTING WALL(S) TO REMAIN
NEW WALL WHERE INDICATED
A. ALL NEW WALLS TO BE TYPE A3-S UNLESS NOTED OTHERWISE
B. WOOD FLOORING FINISH UNLESS NOTED OTHERWISE. ASSUME \$13/SF MATERIAL ALLOWANCE.
C. PERIMETER WALLS SCOPE:
- EXISTING BRICK TO BE CLEANED AND TUCK POINTED WHERE NECESSARY.
- FINISHED WITH CLEAR MATTE SEALER.
- EXISTING CONCRETE TO BE CLEANED AND PAINTED

GENERAL FINISH NOTES

- A. ALL NEW WALLS ARE PAINT, U.N.O.
B. LEVEL & FINISH OF GYP. BD. WALLS AND SOFFITS TO BE LEVEL 4 FINISH, U.N.O.
C. ALL GYP. BOARD CEILINGS TO BE PAINTED, U.N.O.
D. CARPET SEAMS TO BE LOCATED AT CENTERLINE OF DOOR IN CLOSED POSITION.
E. ALIGN FLOORING TRANSITIONS WITH FINISH BASE EXCEPT AT DOORS, U.N.O.
F. ALL TRANSITION/REDUCER STRIPS AND OTHER THRESHOLDS TO BE LOCATED AT CENTERLINE OF DOOR WHEN IN CLOSED POSITION
G. ALL REQUIRED FLOORING PREPARATIONS SHALL BE BY FLOORING CONTRACTOR.
H. PAINT ALL HOLLOW METAL DOOR FRAMES P3, U.N.O.
I. SEAL AROUND ALL DOOR FRAMES AND CASEWORK WITH COLOR TO MATCH WALL.
J. ALL PLASTIC LAMINATE ON VERTICAL SURFACES TO RUN VERTICALLY.
K. PAINT WALLS: EGG-SHELL
PAINT CEILINGS: FLAT
PAINT DOOR FRAMES/TRIM: SATIN
L. ALL FINISH MATERIAL SAMPLES AND PRODUCT DATA ARE TO BE SUBMITTED TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.


PLAN NOTES

- 1 GC TO VERIFY STRUCTURAL JOIST LOCATIONS BELOW AND RELOCATE TOILETS AS NECESSARY TO AVOID PLUMBING CONFLICTS. TOILETS TO BE CENTERED BETWEEN TOILET PARTITION WALLS. REFER TO FINISH PLANS FOR FLOOR AND WALL TREATMENT. GENERAL MOUNTING HEIGHTS CAN BE FOUND ON G002.
2 COOLER/FREEZER UNIT BY FSE VENDOR (OWNER CONTRACT). UNIT SIZE APPROX. BY PLANS. UNIT HEIGHT APPROX. 8' TALL.
3 APPROX. 8' TALL COOLER/FREEZER/KEG ROOM. UNIT BY FSE VENDOR (OWNER CONTRACT).
4 TV BY OWNER. MOUNT AT 60" AFF ON CENTER U.N.O. PROVIDE MOUNTING BRACKET. COORDINATE TV AND BRACKET SIZING WITH OWNER.
5 FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
6 NEW PARTITION WALL TO REPLACE DEMOLISHED. ALIGN TO PREVIOUS LOCATION.
7 ALL TRASH/RECYCLE SERVICE AND STORAGE EQUIPMENT TO BE PROVIDED BY OWNER. ALL WALL COVERINGS TO BE WATER-RESISTANT. INSTALL FLOOR DRAIN AND SLOPE ALL FLOORING TO DRAIN. REFER TO PLUMBING FOR DRAIN SIZE AND LOCATION. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
8 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
9 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
10 HOLLOW METAL DOOR INSTALLED IN EXISTING HOLLOW METAL FRAME. GC TO NOTIFY ARCHITECT IF FRAMES DO NOT MEET FIRE RATING REQUIREMENTS.
11 4' X 8' DOUBLE-ACTING KITCHEN DOOR. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
12 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
13 24" DIAMETER TRASH CHUTE WITH DRAIN AND HOSEBIB AT GRADE LEVEL. TRASH CHUTE IN 2-HR RATED ENCLOSURE. PROVIDE 3/4" MIN. RATED CHUTE-TYPE FIRE DOOR AT FLOORS (Basis of Design: CHUTES INTERNATIONAL) CHUTE DOOR TO MEET UL CERTIFICATION NO. GSPR R21689. TRASH CHUTE SANITIZER LOCATED ON LEVEL 04. REFER TO PLUMBING AND SPECIFICATIONS FOR FURTHER INFORMATION.
14 6' X 10' EXTERIOR ALUMINUM GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
15 RESTORE EXISTING COLUMN. LIGHTLY SAND AREAS OF WOOD AND REFINISH WITH STAIN. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
16 EXISTING ELEVATOR TO REMAIN. MAINTENANCE AS NECESSARY TO RESUME SERVICE. ALL NEW CAB FINISHES - SNABAC MODERN 1 STYLE. REPLACE EXISTING LAMINATE WITH P1.8 (SNABAC STANDARD FINISH). NEW W/OI FLOORING PATCH AND REPAIR EXISTING CEILING AS NECESSARY. REPAINT ELEVATOR DOORS AND TRIM - PAINT COLOR SPEC AT EACH LEVEL TO BE DISCUSSED ON SITE.
17 EXISTING FREIGHT HOISTWAY TO BE UTILIZED FOR VERTICAL INFRASTRUCTURE RUNS. REFER TO MEP DRAWINGS FOR LOCATIONS AND SIZES.
18 EXISTING WALL-MOUNTED HANDRAILS TO BE REPLACED WITH NEW CODE COMPLIANT PIPE HANDRAILS (SIMILAR TO EXISTING). INTERIOR STAIR MOUNTED HANDRAILS TO REMAIN. ALL STEEL STRINGERS, HANDRAILS, RISERS AND OTHER EXPOSED ELEMENTS TO BE FIELD PAINTED P3. AREAS OF EXPOSED BRICK OR CMU TO BE FURRED OUT AND DRYWALLED. REFER TO FINISH SCHEDULE FOR FURTHER INFORMATION.
19 NEW INTERIOR ALUMINUM CURTAIN WALL SYSTEM IN LOCATIONS INDICATED. MODIFY SPRINKLER SYSTEM TO CREATE SPRINKLER CURTAIN AT THESE LOCATIONS TO MAINTAIN RATED ENCLOSURE (TYCO MODEL WS OR EQUAL). REFER TO PLUMBING FOR FURTHER INFORMATION.
20 REFER TO FINISH PLANS FOR FURTHER INFORMATION.
21 FURR OUT WALL. HOLD STUDS 6" FROM EXISTING FACE TO ALLOW CHASE FOR BEER LINES AND VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION. FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
22 JANITOR CLOSET W/ MOP SINK
23 FOLDING SECURITY GATE TO BE CLOSED DURING NON-OPERATIONAL HOURS OF ASSEMBLY SPACE TO CREATE REASONABLE SEPARATION FROM RESIDENTIAL USER EGRESS FROM STAIR 1. BY ULINE OR EQUAL.
24 NEW FLOOR FRAMING IN THIS AREA. FFE TO BE FLUSH WITH THE EXISTING FLOOR. SEE FINISH PLANS FOR FURTHER INFORMATION.
25 PLATFORM SEATING OVERBUILD IN AREA INDICATED. SEE SECTIONS. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
26 ALL EXISTING HISTORIC WINDOWS TO BE REPAIRED AND RESTORED IN PLACE. ALL FORMER REPLACEMENT WINDOWS TO BE REMOVED AND REPLACED WITH HISTORIC REPLICA WINDOWS OF SIMILAR ERA AND STYLE TO ORIGINAL WINDOWS. REFER TO A604 FOR APPROXIMATE MEASUREMENTS. GC TO VERIFY IN FIELD.
27 3'-0" X 3'-0" DOUBLE-ACTING SWING DOORS. BASIS OF DESIGN: RUSTICA OR APPROVED EQUAL.
28 STOREFRONT WALL W/ INTERM MANDOOR.
29 INTERIOR ALUMINUM STOREFRONT SYSTEM. REFER TO STOREFRONT ELEVATIONS FOR FURTHER INFORMATION.
30 MOSAIC TILE FLOORING IN SHOWER. PROVIDE ADEQUATE WATERPROOFING AND SLOPING CONDITIONS.
31 8' X 10' INTERIOR ALUMINUM GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
32 TIERED FLOOR EXTENSION LOWERED 42" FROM FFE. MUSIC VIEWING TERRACE GUARDRAIL TO BE PROVIDED BY SPHON ASSOCIATES. RAILING TO BE BLACK WITH METAL DRINK TOPPER. BASIS OF DESIGN: HOLLANDER - QUAD AL. METAL PANEL INFILL TO BE CHOSEN FROM GR3 METAL FABRICS PULL. SELECTION OF PATTERNS. FINISHED FACE OF DRINK PLATFORM TO REACH 3'-0" MIN. TERRACE FRAMING TIED TO EXISTING PERIMETER WALLS TO AVOID COLUMNS BELOW. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
33 RESTORE EXISTING CEILING AND WALL CONDITIONS AS INDICATED ON A210. INSTALL NEW PORCELAIN TILE FLOORING OVER WEATHERPROOF MEMBRANE. FLOOR PREP TO PROVIDE MINIMAL SLOPE TO DRAIN AS POSSIBLE. REFER TO PLUMBING DRAWINGS FOR DRAIN LOCATION AND SIZE.
34 EXISTING BRICK FIREPLACE TO REMAIN AND BE RESTORED. AREAS OF BRICK TO BE TUCKPOINTED. PAINTED MASONRY BLOCK TO BE TUCKPOINTED AND REPAINTED. WOOD MANTLE TO BE Sanded AND RESEALED. PAINT P11. VENTLESS GAS FIREPLACE TO BE INSTALLED. BASIS OF DESIGN MOTIGO H8W0. SINGLE SIDED VENTLESS FIREPLACE INSERT. REFER TO MEP FOR GAS AND ELECTRICAL REQUIREMENTS.
35 RAISED PLATFORM SEATING OVERBUILD. 6" FROM EXISTING FFE.
36 AREA RESERVED FOR DJ MIXING BOOTH. REFER TO ELEC FOR SCOPE. FINISHES TO MATCH SURROUNDING. AREA SEPARATED BY 3'-0" SWING GATE.
37 INFILL EXISTING WAINSCOTING AS INDICATED ON ELEVATIONS. REFER TO FINISH PLANS FOR MORE INFORMATION.
38 LINE OF SAWTOOTH SKYLIGHT ABOVE. 8'-0" X 12'-0. REFER TO A105 FOR FURTHER INFORMATION.
39 NEW ROOF ACCESS LADDER
40 RAISED FLOOR PLATFORM 2'-0" FROM EXISTING FFE. RAILING TO BE METAL. SCREEN FILL WITH DRINK RAIL/PLATFORM ON TOP. FINISHED FACE OF DRINK PLATFORM TO REACH 36" MIN.
41 STACKED WASHER/DRYER UNIT BY OWNER. REFER TO MEP FOR HOOK-UP LOCATIONS.
42 KITCHENETTE APPLIANCES IN GENERAL CONTRACTORS PACKAGE. REFER TO MEP FOR HOOK-UP LOCATIONS.
43 LINE OF NEW ROOF ACCESS HATCH ABOVE.
44 FIXED STADIUM SEATING. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
45 MAINTENANCE PLATFORM. SERVICE-GRADE STEEL FLOOR TO BE INSTALLED FLUSH WITH FFE.
46 EXISTING BUILDING CONDITIONS TO BE CLEANED. REPAIRED OR PATCHED IN PREPARATION FOR NEW FINISHES. REMOVE ALL DEBRIS AND DECOMMISSIONED EQUIPMENT. WOODEN SHELVING TO BE REMOVED THROUGHOUT.
47 FURR OUT WALL. HOLD STUDS 4" FROM EXISTING FACE BEHIND RESTROOMS TO ALLOW CHASE FOR VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION.
48 FURR OUT EXISTING WALL AS NEEDED. FINISH FACE TO BE FLUSH WITH ADJACENT SPRINKLED CURTAIN WALL. MULLION AND NEW KNEE WALL.
49 EXISTING HISTORIC MOSAIC TILE AND CONCRETE SURROUND. REPAIR AND RESTORE IN PLACE.
50 EXISTING GUARDRAIL TO BE MODIFIED TO MEET 42" AFF. CODE COMPLIANT HEIGHT.
51 SPRING-LOADED SWINGING SAFETY EGRESS GATE. WALL-MOUNTED, SWINGING IN PATH OF EGRESS TRAVEL.
52 SECURE STORAGE. 2-HR RATED WALLS AND A 90-MINUTE DOOR AND FRAME TO SEPARATE CLOSET FROM STAIR 2.


PLUMBING FIXTURE SCHEDULE

Table with columns: MARK, MANUFACTURER, MODEL, DESCRIPTION. Includes items like PF-08 DAYTON OR EQ. KRAUS HAND SINK, PF-09 ELKAY LBWDC00BK C 42" H2O® LV PRO COMMERCIAL BUILT-IN WATER DISPENSER, PF-10 EAGLE GROUP OR EQ. F2820-12; 321561; 312669; 312669; 503099 OR 503098 MOP SINK, BRACKET, SERVICE FAUCET, AND RIGHT/REAR OR LEFT/REAR 16" SPLASH KIT, PF-11 HOSE BIB HOSE BIB, MOUNT 12" FROM FFE.

*REFER TO A401 & A415 FOR RESTROOM FIXTURE SCHEDULE

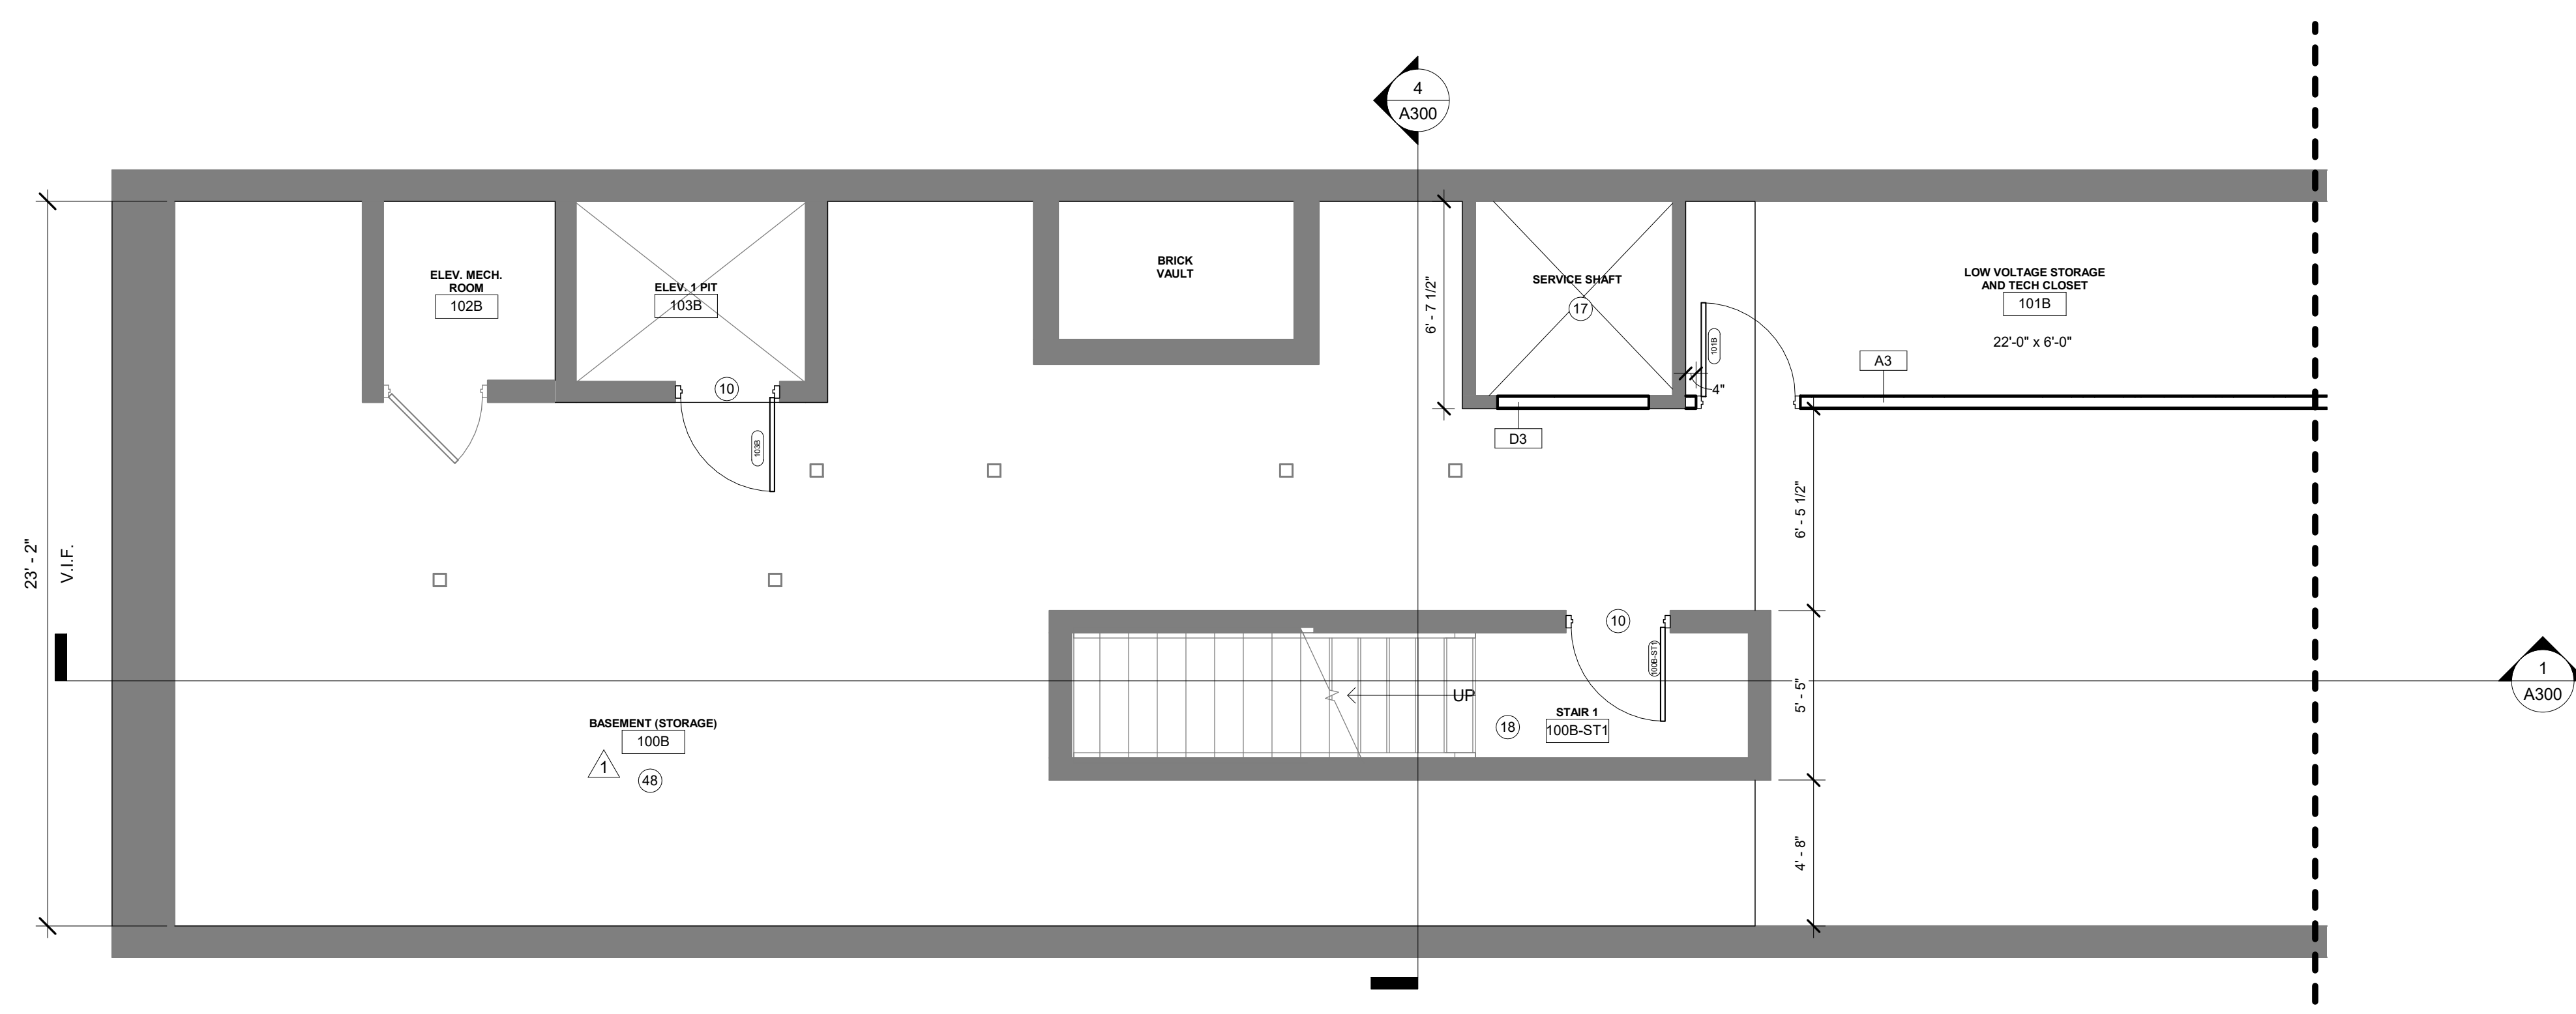

2 ARCHITECTURAL PLAN - BASEMENT LEVEL - SOUTH

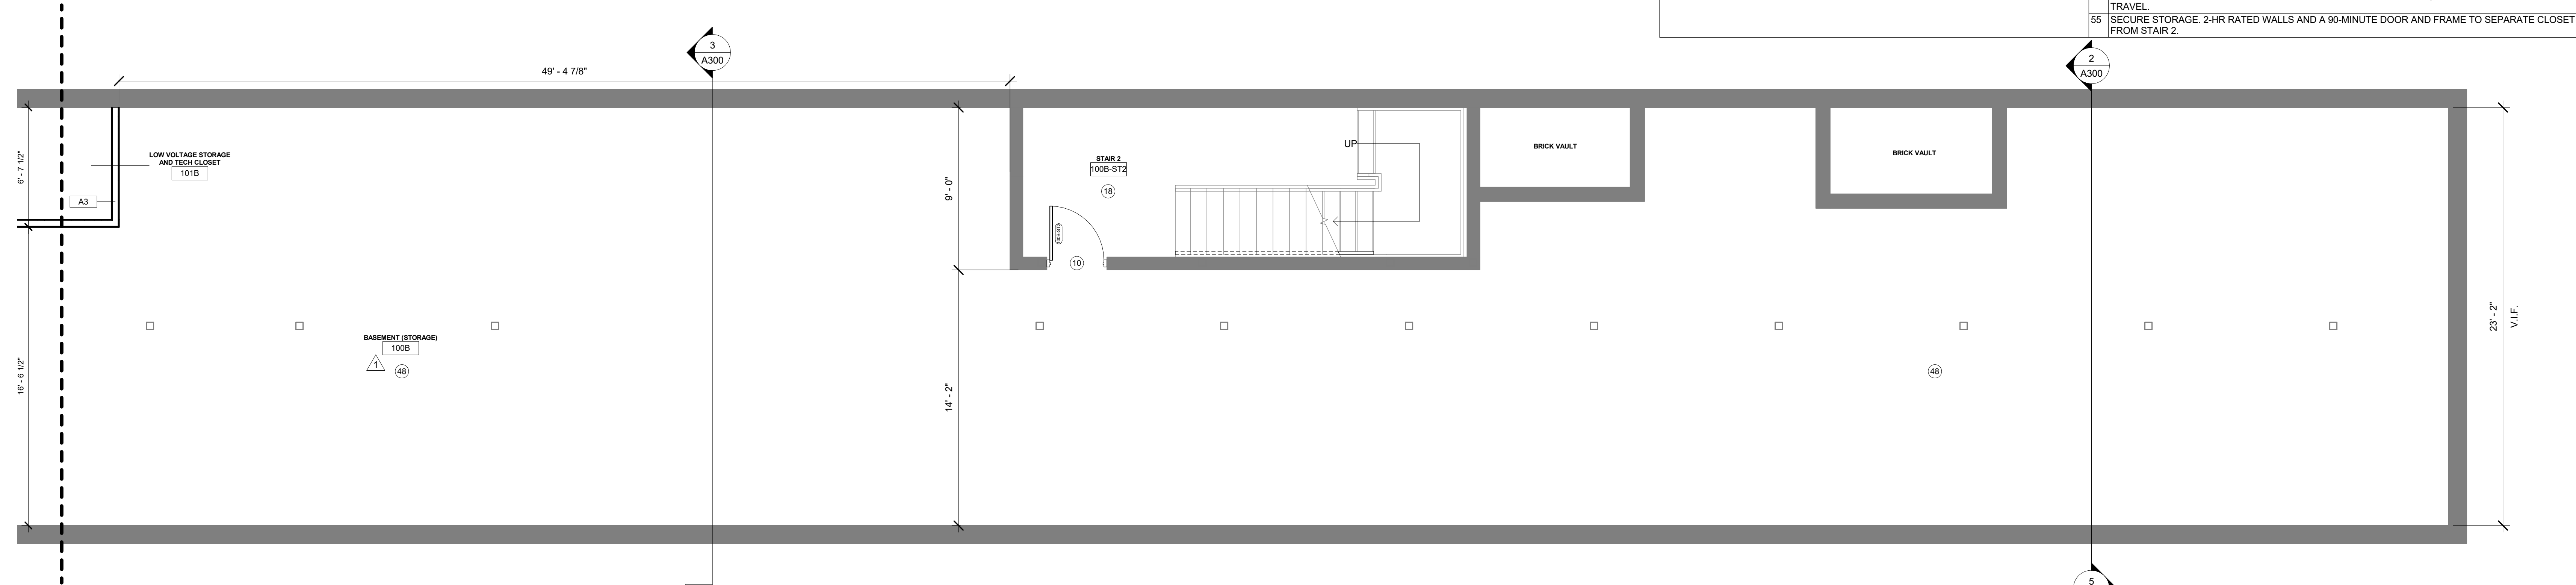

1 ARCHITECTURAL PLAN - BASEMENT LEVEL - NORTH



10 W MARKET ST
SUITE 800
INDIANAPOLIS, IN 46204
P: 317.614.0055
F: 317.632.5662
DKGRARCH.COM

OWNER: THE NUMBERS HOLDING COMPANY
3560 CHESTNUT PLACE
DENVER, CO 80202
P: 303.493.0051
www.numbersholding.com


STRUCTURAL ENGINEER: KPFF
125 S. 6TH STREET
SUITE 200
LOUISVILLE, KY 40202
P: 502.325.0100
www.kpff.com
MEP ENGINEER: CIRCLE DESIGN GROUP
8225 DELEGATES ROW
SUITE 100
INDIANAPOLIS, IN 46240
P: 317.632.5662
www.circledesigngroup.com

CIVIL ENGINEER: LAND DESIGN & DEVELOPMENT
503 WASHINGTON AVENUE
SUITE 100
LOUISVILLE, KY 40202
P: 502.408.8174
www.lsd-inc.com

SHEET REVISIONS table with columns: #, DESCRIPTION, DATE. Includes revision 1: Addendum #3, 11.19.2021 and revision 2: Addendum #5, 01.23.2023.

NUMBER 15 ENTERTAINMENT VENUE
121 West Main St
Louisville, KY 40202

DATE: 04.19.2022
PROJECT #: 2021-016

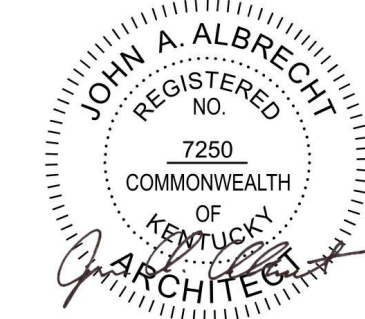

FLOOR PLAN - BASEMENT LEVEL

SHEET NO. A100.B

PLAN KEY

BUILDING KEY

GENERAL PLAN NOTES

PLAN NOTES

- EXISTING WALL(S) TO REMAIN
- NEW WALL WHERE INDICATED
- ALL NEW WALLS TO BE TYPE A3-S UNLESS NOTED OTHERWISE
- WOOD FLOORING FINISH UNLESS NOTED OTHERWISE. ASSUME \$13/SF MATERIAL ALLOWANCE.
- PERIMETER WALLS SCOPE:
 - EXISTING BRICK TO BE CLEANED AND TUCK POINTED WHERE NECESSARY.
 - FINISHED WITH CLEAR MATTE SEALER.
 - EXISTING CONCRETE TO BE FINISHED AND PAINTED

- GC TO VERIFY STRUCTURAL JOIST LOCATIONS BELOW AND RELOCATE TOILETS AS NECESSARY TO AVOID PLUMBING CONFLICTS. TOILETS TO BE CENTERED BETWEEN TOILET PARTITION WALLS. REFER TO FINISH PLANS FOR FLOOR AND WALL TREATMENT. GENERAL MOUNTING HEIGHTS CAN BE FOUND ON G002.
- COOLER/FREEZER UNIT BY FSE VENDOR (OWNER CONTRACT). UNIT SIZE APPROX. BY PLANS. UNIT HEIGHT APPROX. 8' 11".
- APPROX. 8' TALL COOLER/FREEZER/KEG ROOM. UNIT BY FSE VENDOR (OWNER CONTRACT).
- TV BY OWNER. MOUNT AT 60" AFF ON CENTER U.N.O. PROVIDE MOUNTING BRACKET. COORDINATE TV AND BRACKET SIZING WITH OWNER.
- FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- NEW PARTITION WALL TO REPLACE DEMOLISHED. ALIGN TO PREVIOUS LOCATION.
- ALL TRASH/RECYCLE SERVICE AND STORAGE EQUIPMENT TO BE PROVIDED BY OWNER. ALL WALL COVERINGS TO BE WATER-RESISTANT. INSTALL FLOOR DRAIN AND SLOPE ALL FLOORING TO DRAIN. REFER TO PLUMBING FOR DRAIN SIZE AND LOCATION. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- HOLLOW METAL DOOR INSTALLED IN EXISTING HOLLOW METAL FRAME. GC TO NOTIFY ARCHITECT IF FRAMES DO NOT MEET FIRE RATING REQUIREMENTS.
- 4' X 8' DOUBLE-ACTING KITCHEN DOOR. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 24" DIAMETER TRASH CHUTE WITH DRAIN AND HOSEBIB AT GROUND LEVEL. TRASH CHUTE IN 2-HR RATED ENCLOSURE. PROVIDE MIN. RATED CHUTE-TYPE FIRE DOOR AT FLOORS G504 (BASIS OF DESIGN: CHUTES INTERNATIONAL) CHUTE DOOR TO MEET UL CERTIFICATION NO. GSPR R21689. TRASH CHUTE SANITIZER LOCATED ON LEVEL G4. REFER TO PLUMBING AND SPECIFICATIONS FOR FURTHER INFORMATION.
- 6' X 10' EXTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- RESTORE EXISTING COLUMN. LIGHTLY SAND AREAS OF WOOD AND REFINISH WITH STAIN. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- EXISTING ELEVATOR TO REMAIN. MAINTENANCE AS NECESSARY TO RESUME SERVICE. ALL NEW CAB FINISHES - SNABACB MODERN 1 STYLE. REPLACE EXISTING LAMINATE WITH P1.8 (SNABACB STANDARD FINISH). NEW W/O1 FLOORING PATCH AND REPAIR EXISTING CEILING AS NECESSARY. REPAINT ELEVATOR DOORS AND TRIM - PAINT COLOR SPEC AT EACH LEVEL TO BE DISCUSSED ON SITE.
- EXISTING FREIGHT HOISTWAY TO BE UTILIZED FOR VERTICAL INFRASTRUCTURE RUNS. REFER TO MEP DRAWINGS FOR LOCATIONS AND SIZES.
- EXISTING WALL-MOUNTED HANDRAILS TO BE REPLACED WITH NEW CODE COMPLIANT PIPE HANDRAILS (SIMILAR TO EXISTING). INTERIOR STAIR MOUNTED HANDRAILS TO REMAIN. ALL STEEL STRINGERS, HANDRAILS, RISERS AND OTHER EXPOSED ELEMENTS TO BE FIELD PAINTED P3. AREAS OF EXPOSED BRICK OR CMU TO BE FURRED OUT AND DRYWALLED. REFER TO FINISH SCHEDULE FOR FURTHER INFORMATION.
- NEW INTERIOR ALUMINUM CURTAIN WALL SYSTEM IN LOCATIONS INDICATED. MODIFY SPRINKLER SYSTEM TO CREATE SPRINKLER CURTAIN AT THESE LOCATIONS TO MAINTAIN RATED ENCLOSURE (TYCO MODEL WS OR EQUAL). REFER TO PLUMBING FOR FURTHER INFORMATION.
- REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- FURR OUT WALL. HOLD STUDS 6" FROM EXISTING FACE TO ALLOW CHASE FOR BEER LINES AND VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION. FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- JANITOR CLOSET W/ MOP SINK
- FOLDING SECURITY GATE TO BE CLOSED DURING NON-OPERATIONAL HOURS OF ASSEMBLY SPACE TO CREATE REASONABLE SEPARATION FROM RESIDENTIAL USER EGRESS FROM STAIR 1. BY ULINE OR EQUAL.
- NEW FLOOR FRAMING IN THIS AREA. FFE TO BE FLUSH WITH THE EXISTING FLOOR. SEE FINISH PLANS FOR FLOOR TREATMENT SCOPE. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- PLATFORM SEATING OVERBUILD IN AREA INDICATED. SEE SECTIONS. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- ALL EXISTING HISTORIC WINDOWS TO BE REPAIRED AND RESTORED IN PLACE. ALL FORMER REPLACEMENT WINDOWS TO BE REMOVED AND REPLACED WITH HISTORIC REPLICA WINDOWS OF SIMILAR ERA AND STYLE TO ORIGINAL WINDOWS. REFER TO A604 FOR APPROXIMATE MEASUREMENTS. GC TO VERIFY IN FIELD.
- 3'-0" X 3'-0" DOUBLE-ACTING SWING DOORS. BASIS OF DESIGN: RUSTICA OR APPROVED EQUAL.
- STOREFRONT WALL W/ INTERM MANDOOR.
- INTERIOR ALUMINUM STOREFRONT SYSTEM. REFER TO STOREFRONT ELEVATIONS FOR FURTHER INFORMATION.
- MOSAIC TILE FLOORING IN SHOWER. PROVIDE ADEQUATE WATERPROOFING AND SLOPING CONDITIONS.
- 8' X 10' INTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- TIERED FLOOR EXTENSION LOWERED 42" FROM FFE. MUSIC VIEWING TERRACE GUARDRAIL TO BE PROVIDED BY SPHON ASSOCIATES. RAILING TO BE BLACK WITH METAL DRINK TOPPER. BASIS OF DESIGN: HOLLANDER - QUAD AL. METAL PANEL INFILL TO BE CHOSEN FROM GR3 METAL FABRICS FULL SELECTION OF PATTERNS. FINISHED FACE OF DRINK PLATFORM TO REACH 3'-0" MIN. TERRACE FRAMING TIED TO EXISTING PERIMETER WALLS TO AVOID COLUMNS BELOW. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
- RESTORE EXISTING CEILING AND WALL CONDITIONS AS INDICATED ON A210. INSTALL NEW PORCELAIN TILE FLOORING OVER WEATHERPROOF MEMBRANE. FLOOR PREP TO PROVIDE MINIMAL TILE TO DRAIN AS POSSIBLE. REFER TO PLUMBING DRAWINGS FOR DRAIN LOCATION AND SIZE.
- EXISTING BRICK FIREPLACE TO REMAIN AND BE RESTORED. AREAS OF BRICK TO BE TUCKPOINTED. PAINTED MASONRY BLOCK TO BE TUCKPOINTED AND REPAINTED. WOOD WANTEL TO BE SANDED AND RESEALED. PAINT P11. VENTLESS GAS FIREPLACE TO BE INSTALLED. BASIS OF DESIGN MOTIGO HSNVO. SINGLE SIDED VENTLESS FIREPLACE INSERT. REFER TO MEP FOR GAS AND ELECTRICAL REQUIREMENTS.
- RAISED PLATFORM SEATING OVERBUILD. 6" FROM EXISTING FFE.
- AREA RESERVED FOR DJ MIXING BOOTH. REFER TO ELEC FOR SCOPE. FINISHES TO MATCH SURROUNDING. AREA SEPARATE BY 3'-0" SWING GATE.
- INFILL EXISTING WAINSCOTING AS INDICATED ON ELEVATIONS. REFER TO FINISH PLANS FOR MORE INFORMATION.
- LINE OF SAWTOOTH SKYLIGHT ABOVE. 8'-0" X 12'-0. REFER TO A105 FOR FURTHER INFORMATION.
- NEW ROOF ACCESS LADDER
- RAISED FLOOR PLATFORM 2'-0" FROM EXISTING FFE. RAILING TO BE METAL. SCREEN FILL WITH DRINK RAIL PLATFORM ON TOP. FINISHED FACE OF DRINK PLATFORM TO REACH 3'-0" MIN.
- STACKED WASHER/DRYER UNIT BY OWNER. REFER TO MEP FOR HOOK-UP LOCATIONS.
- KITCHENETTE APPLIANCES IN GENERAL CONTRACTORS PACKAGE. REFER TO MEP FOR HOOK-UP LOCATIONS.
- LINE OF NEW ROOF ACCESS HATCH ABOVE.
- FIXED STADIUM SEATING. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- MAINTENANCE PLATFORM. SERVICE-GRADE STEEL FLOOR TO BE INSTALLED FLUSH WITH FFE.
- EXISTING BUILDING CONDITIONS TO BE CLEANED. REPAIRED OR PATCHED IN PREPARATION FOR NEW FINISHES. REMOVE ALL DEBRIS AND DECOMMISSIONED EQUIPMENT. WOODEN SHELVING TO BE REMOVED THROUGHOUT.
- FURR OUT WALL. HOLD STUDS 4" FROM EXISTING FACE BEHIND RESTROOMS TO ALLOW CHASE FOR VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION.
- FURR OUT EXISTING WALL AS NEEDED. FINISH FACE TO BE FLUSH WITH ADJACENT SPRINKLED CURTAIN WALL MULLION AND NEW KNEE WALL.
- EXISTING HISTORIC MOSAIC TILE AND CONCRETE SURROUND. REPAIR AND RESTORE IN PLACE.
- EXISTING GUARDRAIL TO BE MODIFIED TO MEET 42" AFF. CODE COMPLIANT HEIGHT.
- SPRING-LOADED SWINGING SAFETY EGRESS GATE. WALL-MOUNTED, SWINGING IN PATH OF EGRESS TRAVEL.
- SECURE STORAGE. 2-HR RATED WALLS AND A 90-MINUTE DOOR AND FRAME TO SEPARATE CLOSET FROM STAIR 2.

PLUMBING FIXTURE SCHEDULE

MARK	MANUFACTURER	MODEL	DESCRIPTION
PF-08	DAYTON OR EQ.	KRAUS	HAND SINK - COUNTER-MOUNTED SINGLE BOWL STAINLESS SINK, 20" X 18" KRAUS BOLDFEN PULL OUT FAUCET + SOAP DISPENSER
PF-09	ELKAY	LBWD0208C	42"X20" LV PRO COMMERCIAL BUILT-IN WATER DISPENSER - REMOTE FILTER CONFIGURATION
PF-10	EAGLE GROUP OR EQ.	F2820-12; 321561; 312669; 312669; 503099 OR 503098	MOP SINK, BOWL, 4-POLE MOP HOLDER, HOSE & BRACKET, SERVICE FAUCET, AND RIGHT/REAR OR LEFT/REAR 16" SPLASH KIT
PF-11			HOSE BIB

*REFER TO A401 & A415 FOR RESTROOM FIXTURE SCHEDULE

DKGr

10 W MARKET ST
SUITE 800
INDIANAPOLIS, IN 46204
P: 317.614.0055
F: 317.632.5662
DKGR.AR.COM

OWNER:
THE NUMBERS HOLDING COMPANY

3560 CHESTNUT PLACE
DENVER, CO 80202
P: 303.493.0551
www.numbersyrp.com

STRUCTURAL ENGINEER
KPFF
135 S. 6TH STREET
SUITE 200
LOUISVILLE, KY 40202
P: 502.325.0100
www.kpff.com

MEP ENGINEER
CIRCLE DESIGN GROUP
8225 DELEGATES ROW
SUITE 100
INDIANAPOLIS, IN 46240
www.circle-design.com

CIVIL ENGINEER
LAND DESIGN & DEVELOPMENT
503 WASHBURN AVENUE
SUITE 100
LOUISVILLE, KY 40202
P: 502.408.8174
www.lsd-inc.com


STRUCTURAL ENGINEER

MEP ENGINEER


CIVIL ENGINEER

SHEET REVISIONS

#	DESCRIPTION	DATE
1	ISSUED FOR PERMIT	05.19.2022
2	ISSUED FOR PERMIT	05.19.2022
3	ISSUED FOR PERMIT	05.19.2022
4	ISSUED FOR PERMIT	05.19.2022

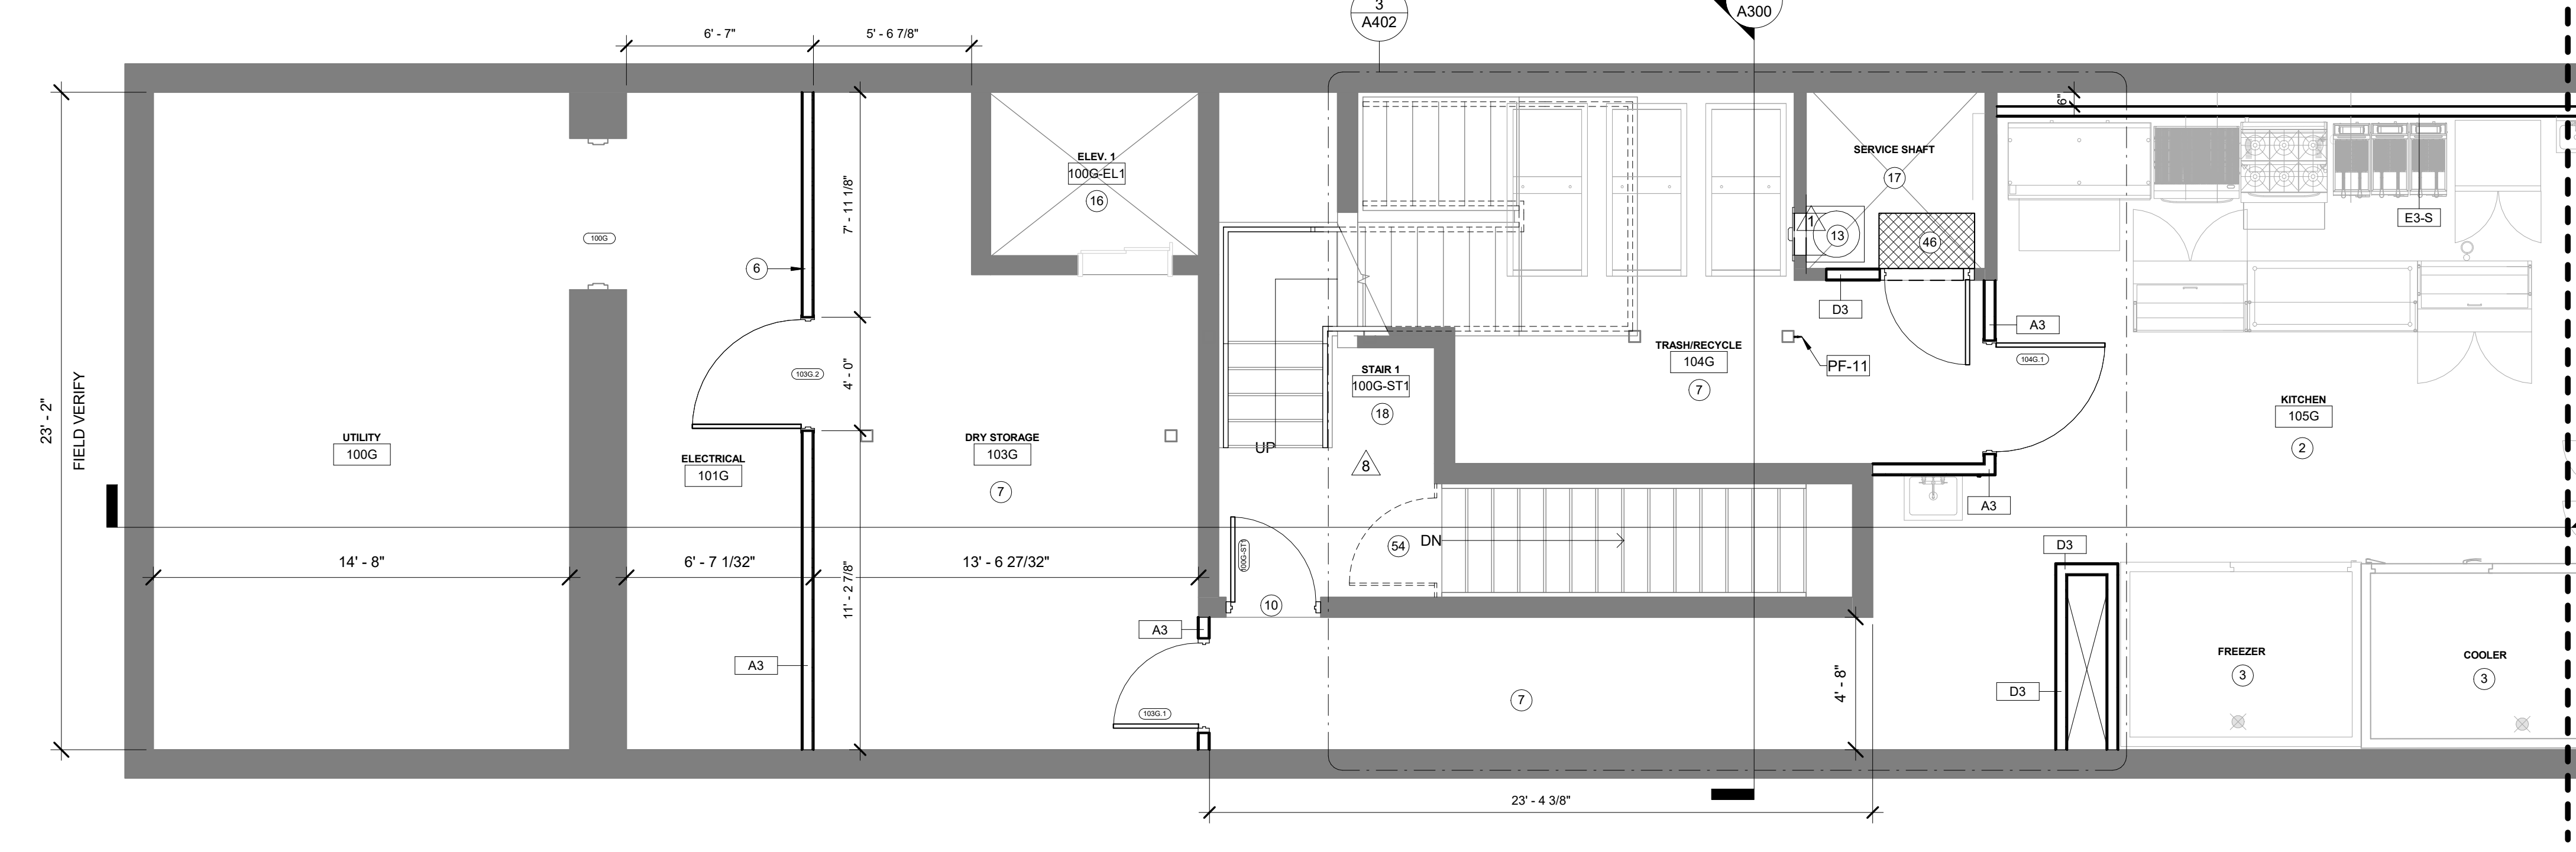

2 ARCHITECTURAL PLAN - GROUND LEVEL - SOUTH

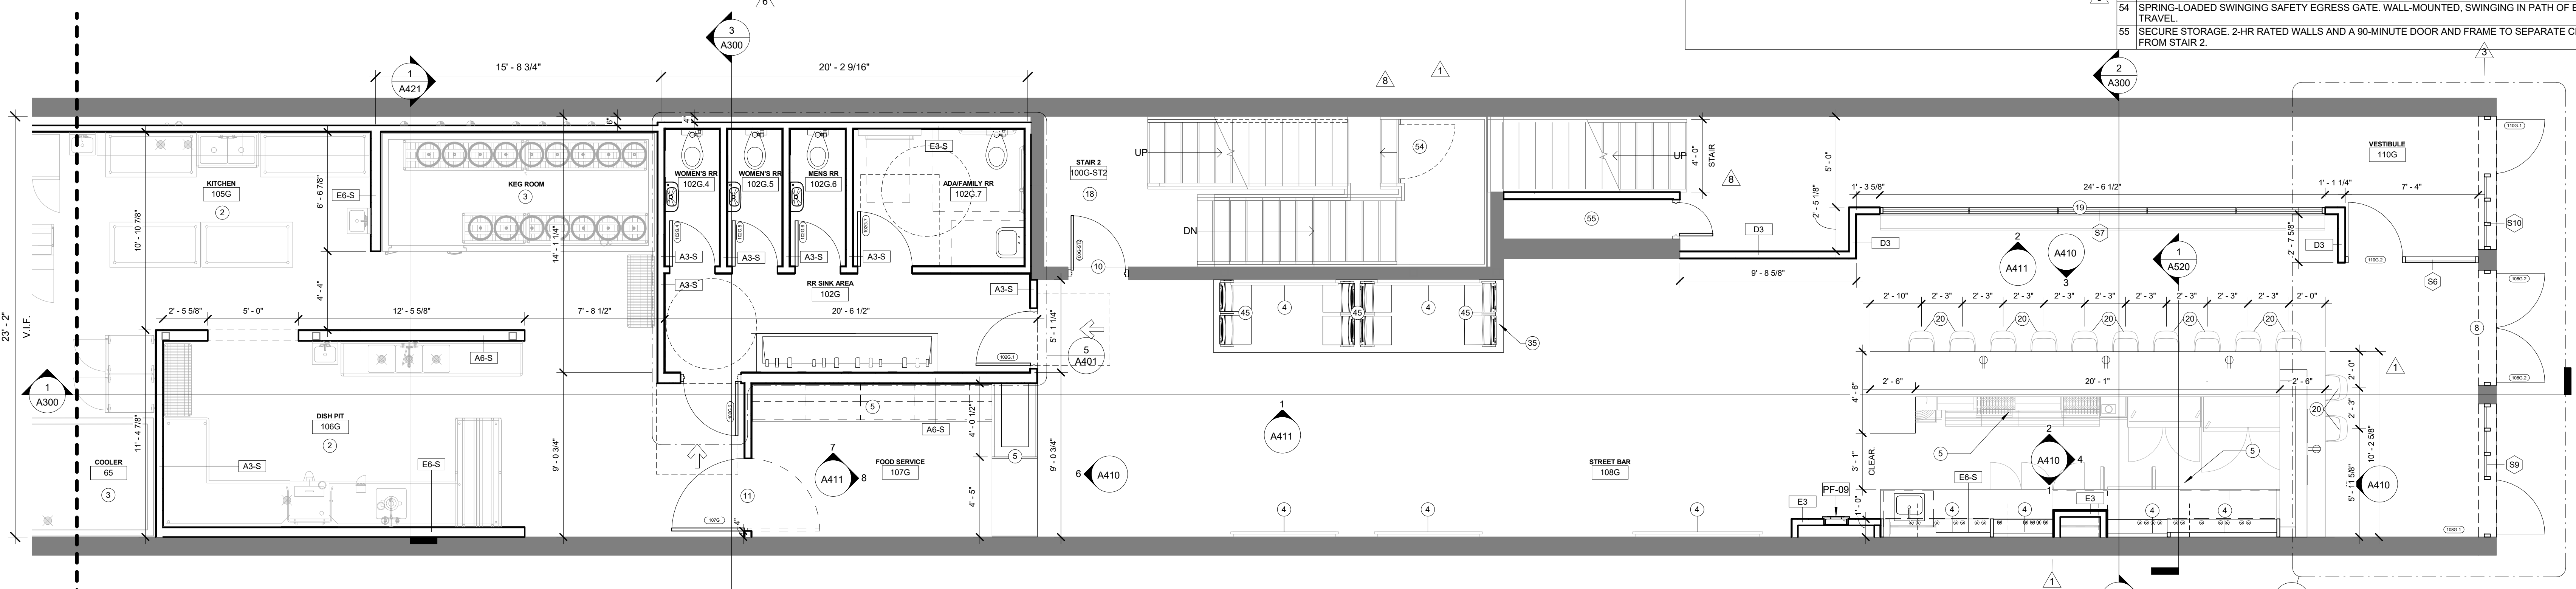

1 ARCHITECTURAL PLAN - GROUND LEVEL - NORTH

NUMBER 15 ENTERTAINMENT VENUE

121 West Main St
Louisville, KY 40202

DATE: 04.19.2022
PROJECT #: 2021-016



FLOOR PLAN - GROUND LEVEL

SHEET NO
A100.G

CHECKED BY: Author DRAWN BY: Checker

PLAN KEY

BUILDING KEY

GENERAL PLAN NOTES

PLAN NOTES

- EXISTING WALL(S) TO REMAIN
 - NEW WALL WHERE INDICATED
- A. ALL NEW WALLS TO BE TYPE A3-S UNLESS NOTED OTHERWISE
- B. WOOD FLOORING FINISH UNLESS NOTED OTHERWISE. ASSUME \$13/SF MATERIAL ALLOWANCE.
- C. PERIMETER WALLS SCOPE:
 - EXISTING BRICK TO BE CLEANED AND TUCK POINTED WHERE NECESSARY.
 - FINISHED WITH CLEAR MATTE SEALER.
 - EXISTING CONCRETE TO BE FINISHED AND PAINTED

GENERAL FINISH NOTES


- A. ALL NEW WALLS ARE PAINT, U.N.O.
- B. LEVEL & FINISH OF GYP. BD. WALLS AND SOFFITS TO BE LEVEL 4 FINISH, U.N.O.
- C. ALL GYP. BOARD CEILINGS TO BE PAINTED, U.N.O.
- D. CARPET SEAMS TO BE LOCATED AT CENTERLINE OF DOOR IN CLOSED POSITION.
- E. ALIGN FLOORING TRANSITIONS WITH FINISH BASE EXCEPT AT DOORS, U.N.O.
- F. ALL TRANSITION/REDUCER STRIPS AND OTHER THRESHOLDS TO BE LOCATED AT CENTERLINE OF DOOR WHEN IN CLOSED POSITION
- G. ALL REQUIRED FLOORING PREPARATIONS SHALL BE BY FLOORING CONTRACTOR.
- H. PAINT ALL HOLLOW METAL DOOR FRAMES P3, U.N.O.
- I. SEAL AROUND ALL DOOR FRAMES AND CASEWORK WITH COLOR TO MATCH WALL.
- J. ALL PLASTIC LAMINATE ON VERTICAL SURFACES TO RUN VERTICALLY.
- K. PAINT WALLS: EGG-SHELL
PAINT CEILINGS: FLAT
PAINT DOOR FRAMES/TRIM: SATIN
- L. ALL FINISH MATERIAL SAMPLES AND PRODUCT DATA ARE TO BE SUBMITTED TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.

PLUMBING FIXTURE SCHEDULE


MARK	MANUFACTURER	MODEL	DESCRIPTION
PF-08	DAYTON OR EQ. KRAUS	--	HAND SINK - COUNTER-MOUNTED SINGLE BOWL STAINLESS SINK, 20" X 18" KRAUS BOLDEN PULL OUT FAUCET + SOAP DISPENSER
PF-09	ELKAY	LBWDC02BK C	42"X20" LV PRO COMMERCIAL BUILT-IN WATER DISPENSER - REMOTE FILTER CONFIGURATION
PF-10	EAGLE GROUP OR EQ.	F2820-12; 321561; 312669; 312660; 503099 OR 503098	MOP SINK BOWL, 4-POLE MOP HOLDER, HOSE & BRACKET, SERVICE FAUCET, AND RIGHT/REAR OR LEFT/REAR 16" SPLASH KIT
PF-11	HOSE BIB	--	HOSE BIB, MOUNT 12" FROM FFE

*REFER TO A401 & A415 FOR RESTROOM FIXTURE SCHEDULE

- 1 GC TO VERIFY STRUCTURAL JOIST LOCATIONS BELOW AND RELOCATE TOILETS AS NECESSARY TO AVOID PLUMBING CONFLICTS. TOILETS TO BE CENTERED BETWEEN TOILET PARTITION WALLS. REFER TO FINISH PLANS FOR FLOOR AND WALL TREATMENT. GENERAL MOUNTING HEIGHTS CAN BE FOUND ON G002.
- 2 COOLER/FREEZER UNIT BY FSE VENDOR (OWNER CONTRACT). UNIT SIZE APPROX. BY PLANS. UNIT HEIGHT APPROX. 8' TALL.
- 3 APPROX. 8' TALL COOLER/FREEZER/KEG ROOM. UNIT BY FSE VENDOR (OWNER CONTRACT).
- 4 TV BY OWNER. MOUNT AT 60" AFF ON CENTER U.N.O. PROVIDE MOUNTING BRACKET. COORDINATE TV AND BRACKET SIZING WITH OWNER.
- 5 FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- 6 NEW PARTITION WALL TO REPLACE DEMOLISHED. ALIGN TO PREVIOUS LOCATION.
- 7 ALL TRASH/RECYCLE SERVICE AND STORAGE EQUIPMENT TO BE PROVIDED BY OWNER. ALL WALL COVERINGS TO BE WATER-RESISTANT. INSTALL FLOOR DRAIN AND SLOPE ALL FLOORING TO DRAIN. REFER TO PLUMBING FOR DRAIN SIZE AND LOCATION. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 8 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 9 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 10 HOLLOW METAL DOOR INSTALLED IN EXISTING HOLLOW METAL FRAME. GC TO NOTIFY ARCHITECT IF FRAMES DO NOT MEET FIRE RATING REQUIREMENTS.
- 11 4' X 8' DOUBLE-ACTING KITCHEN DOOR. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- 12 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 13 24" DIAMETER TRASH CHUTE WITH DRAIN AND HOSEBIB AT GROUND LEVEL. TRASH CHUTE IN 2-HR RATED ENCLOSURE. PROVIDE MIN. RATED CHUTE-TYPE FIRE DOOR AT FLOORS G5-G4 (BASIS OF DESIGN: CHUTES INTERNATIONAL) CHUTE DOOR TO MEET UL CERTIFICATION NO. GSPR R21689. TRASH CHUTE SANITIZER LOCATED ON LEVEL 04. REFER TO PLUMBING AND SPECIFICATIONS FOR FURTHER INFORMATION.
- 14 6' X 10' EXTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- 15 RESTORE EXISTING COLUMN. LIGHTLY SAND AREAS OF WOOD AND REFINISH WITH STAIN. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 16 EXISTING ELEVATOR TO REMAIN. MAINTENANCE AS NECESSARY TO RESUME SERVICE. ALL NEW CAB FINISHES - SNA3CAB MODERN 1 STYLE. REPLACE EXISTING LAMINATE WITH P1.8 (SNA3CAB STANDARD FINISH). NEW W/O1 FLOORING PATCH AND REPAIR EXISTING CEILING AS NECESSARY. REPAINT ELEVATOR DOORS AND TRIM - PAINT COLOR SPEC AT EACH LEVEL TO BE DISCUSSED ON SITE.
- 17 EXISTING FREIGHT HOISTWAY TO BE UTILIZED FOR VERTICAL INFRASTRUCTURE RUNS. REFER TO MEP DRAWINGS FOR LOCATIONS AND SIZES.
- 18 EXISTING WALL-MOUNTED HANDRAILS TO BE REPLACED WITH NEW CODE COMPLIANT PIPE HANDRAILS (SIMILAR TO EXISTING). INTERIOR STAIR MOUNTED HANDRAILS TO REMAIN. ALL STEEL STRINGERS, HANDRAILS, RISERS AND OTHER EXPOSED ELEMENTS TO BE FIELD PAINTED P3. AREAS OF EXPOSED BRICK OR CMU TO BE FURRED OUT AND DRYWALLED. REFER TO FINISH SCHEDULE FOR FURTHER INFORMATION.
- 19 NEW INTERIOR ALUMINUM CURTAIN WALL SYSTEM IN LOCATIONS INDICATED. MODIFY SPRINKLER SYSTEM TO CREATE SPRINKLER CURTAIN AT THESE LOCATIONS TO MAINTAIN RATED ENCLOSURE (TYCO MODEL WS OR EQUAL). REFER TO PLUMBING FOR FURTHER INFORMATION.
- 20 REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 21 FURR OUT WALL. HOLD STUDS 6" FROM EXISTING FACE TO ALLOW CHASE FOR BEER LINES AND VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION. FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- 22 JANITOR CLOSET W/ MOP SINK
- 23 FOLDING SECURITY GATE TO BE CLOSED DURING NON-OPERATIONAL HOURS OF ASSEMBLY SPACE TO CREATE REASONABLE SEPARATION FROM RESIDENTIAL USER EGRESS FROM STAIR 1. BY ULINE OR EQUAL.
- 24 NEW FLOOR FRAMING IN THIS AREA. FFE TO BE FLUSH WITH THE EXISTING FLOOR. SEE FINISH PLANS FOR FLOOR TREATMENT SCOPE. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- 25 PLATFORM SEATING OVERBUILD IN AREA INDICATED. SEE SECTIONS. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- 26 ALL EXISTING HISTORIC WINDOWS TO BE REPAIRED AND REPLACED IN PLACE. ALL FORMER REPLACEMENT WINDOWS TO BE REMOVED AND RESTORED WITH HISTORIC REPLICA WINDOWS OF SIMILAR ERA AND STYLE TO ORIGINAL WINDOWS. REFER TO A604 FOR APPROXIMATE MEASUREMENTS. GC TO VERIFY IN FIELD.
- 27 3'-0" X 3'-4" DOUBLE-ACTING SWING DOORS. BASIS OF DESIGN: RUSTICA OR APPROVED EQUAL.
- 28 STOREFRONT WALL W/ INTERM MANDOOR.
- 29 INTERIOR ALUMINUM STOREFRONT SYSTEM. REFER TO STOREFRONT ELEVATIONS FOR FURTHER INFORMATION.
- 30 MOSAIC TILE FLOORING IN SHOWER. PROVIDE ADEQUATE WATERPROOFING AND SLOPING CONDITIONS.
- 31 8' X 10' INTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- 32 TIERED FLOOR EXTENSION LOWERED 42" FROM FFE. MUSIC VIEWING TERRACE GUARDRAIL TO BE PROVIDED BY SPHON ASSOCIATES. RAILING TO BE BLACK WITH METAL DRINK TOPPER. BASIS OF DESIGN: HOLLANDER - QUAD AL. METAL PANEL INFILL TO BE CHOSEN FROM GR3 METAL FABRICS FULL SELECTION OF PATTERNS. FINISHED FACE OF DRINK PLATFORM TO REACH 3'-0" MIN. TERRACE FRAMING TIED TO EXISTING PERIMETER WALLS TO AVOID COLUMNS BELOW. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
- 33 RESTORE EXISTING CEILING AND WALL CONDITIONS AS INDICATED ON A210. INSTALL NEW PORCELAIN TILE FLOORING OVER WEATHERPROOF MEMBRANE. FLOOR PREP TO PROVIDE MINIMAL SLOPE TO DRAIN AS POSSIBLE. REFER TO PLUMBING DRAWINGS FOR DRAIN LOCATION AND SIZE.
- 34 EXISTING BRICK FIREPLACE TO REMAIN AND BE RESTORED. AREAS OF BRICK TO BE TUCKPOINTED, PAINTED MASONRY BLOCK TO BE TUCKPOINTED AND REPAINTED. WOOD WANTED TO BE Sanded and RESEALED. PAINT P11. VENTLESS GAS FIREPLACE TO BE INSTALLED. BASIS OF DESIGN MOTIGO HSNVO. SINGLE SIDED VENTLESS FIREPLACE INSERT. REFER TO MEP FOR GAS AND ELECTRICAL REQUIREMENTS.
- 35 RAISED PLATFORM SEATING OVERBUILD. 6" FROM EXISTING FFE.
- 36 AREA RESERVED FOR DJ MIXING BOOTH. REFER TO ELEC FOR SCOPE. FINISHES TO MATCH SURROUNDING. AREA SEPARATED BY 3'-0" SWING GATE.
- 37 INFILL EXISTING WAINSCOTING AS INDICATED ON ELEVATIONS. REFER TO FINISH PLANS FOR MORE INFORMATION.
- 38 LINE OF SAWTOOTH SKYLIGHT ABOVE. 8'-0" X 12'-0. REFER TO A105 FOR FURTHER INFORMATION.
- 39 NEW ROOF ACCESS LADDER
- 41 RAISED FLOOR PLATFORM 2'-0" FROM EXISTING FFE. RAILING TO BE METAL SCREEN FILL WITH DRINK RAIL/PLATFORM ON TOP. FINISHED FACE OF DRINK PLATFORM TO REACH 36" MIN.
- 42 STACKED WASHER/DRYER UNIT BY OWNER. REFER TO MEP FOR HOOK-UP LOCATIONS.
- 43 KITCHENETTE APPLIANCES IN GENERAL CONTRACTORS PACKAGE. REFER TO MEP FOR HOOK-UP LOCATIONS.
- 44 LINE OF NEW ROOF ACCESS HATCH ABOVE.
- 45 FIXED STADIUM SEATING. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 46 MAINTENANCE PLATFORM. SERVICE-GRADE STEEL FLOOR TO BE INSTALLED FLUSH WITH FFE.
- 48 EXISTING BUILDING CONDITIONS TO BE CLEANED. REPAIRED OR PATCHED IN PREPARATION FOR NEW FINISHES. REMOVE ALL DEBRIS AND DECOMMISSIONED EQUIPMENT. WOODEN SHELVING TO BE REMOVED THROUGHOUT.
- 49 FURR OUT WALL. HOLD STUDS 4" FROM EXISTING FACE BEHIND RESTROOMS TO ALLOW CHASE FOR VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION.
- 51 FURR OUT EXISTING WALL AS NEEDED. FINISH FACE TO BE FLUSH WITH ADJACENT SPRINKLED CURTAIN WALL. MULLION AND NEW KNEE WALL.
- 52 EXISTING HISTORIC MOSAIC TILE AND CONCRETE SURROUND. REPAIR AND RESTORE IN PLACE.
- 53 EXISTING GUARDRAIL TO BE MODIFIED TO MEET 42" AFF. CODE COMPLIANT HEIGHT.
- 54 SPRING-LOADED SWINGING SAFETY EGRESS GATE. WALL-MOUNTED, SWINGING IN PATH OF EGRESS TRAVEL.
- 55 SECURE STORAGE. 2-HR RATED WALLS AND A 90-MINUTE DOOR AND FRAME TO SEPARATE CLOSET FROM STAIR 2.

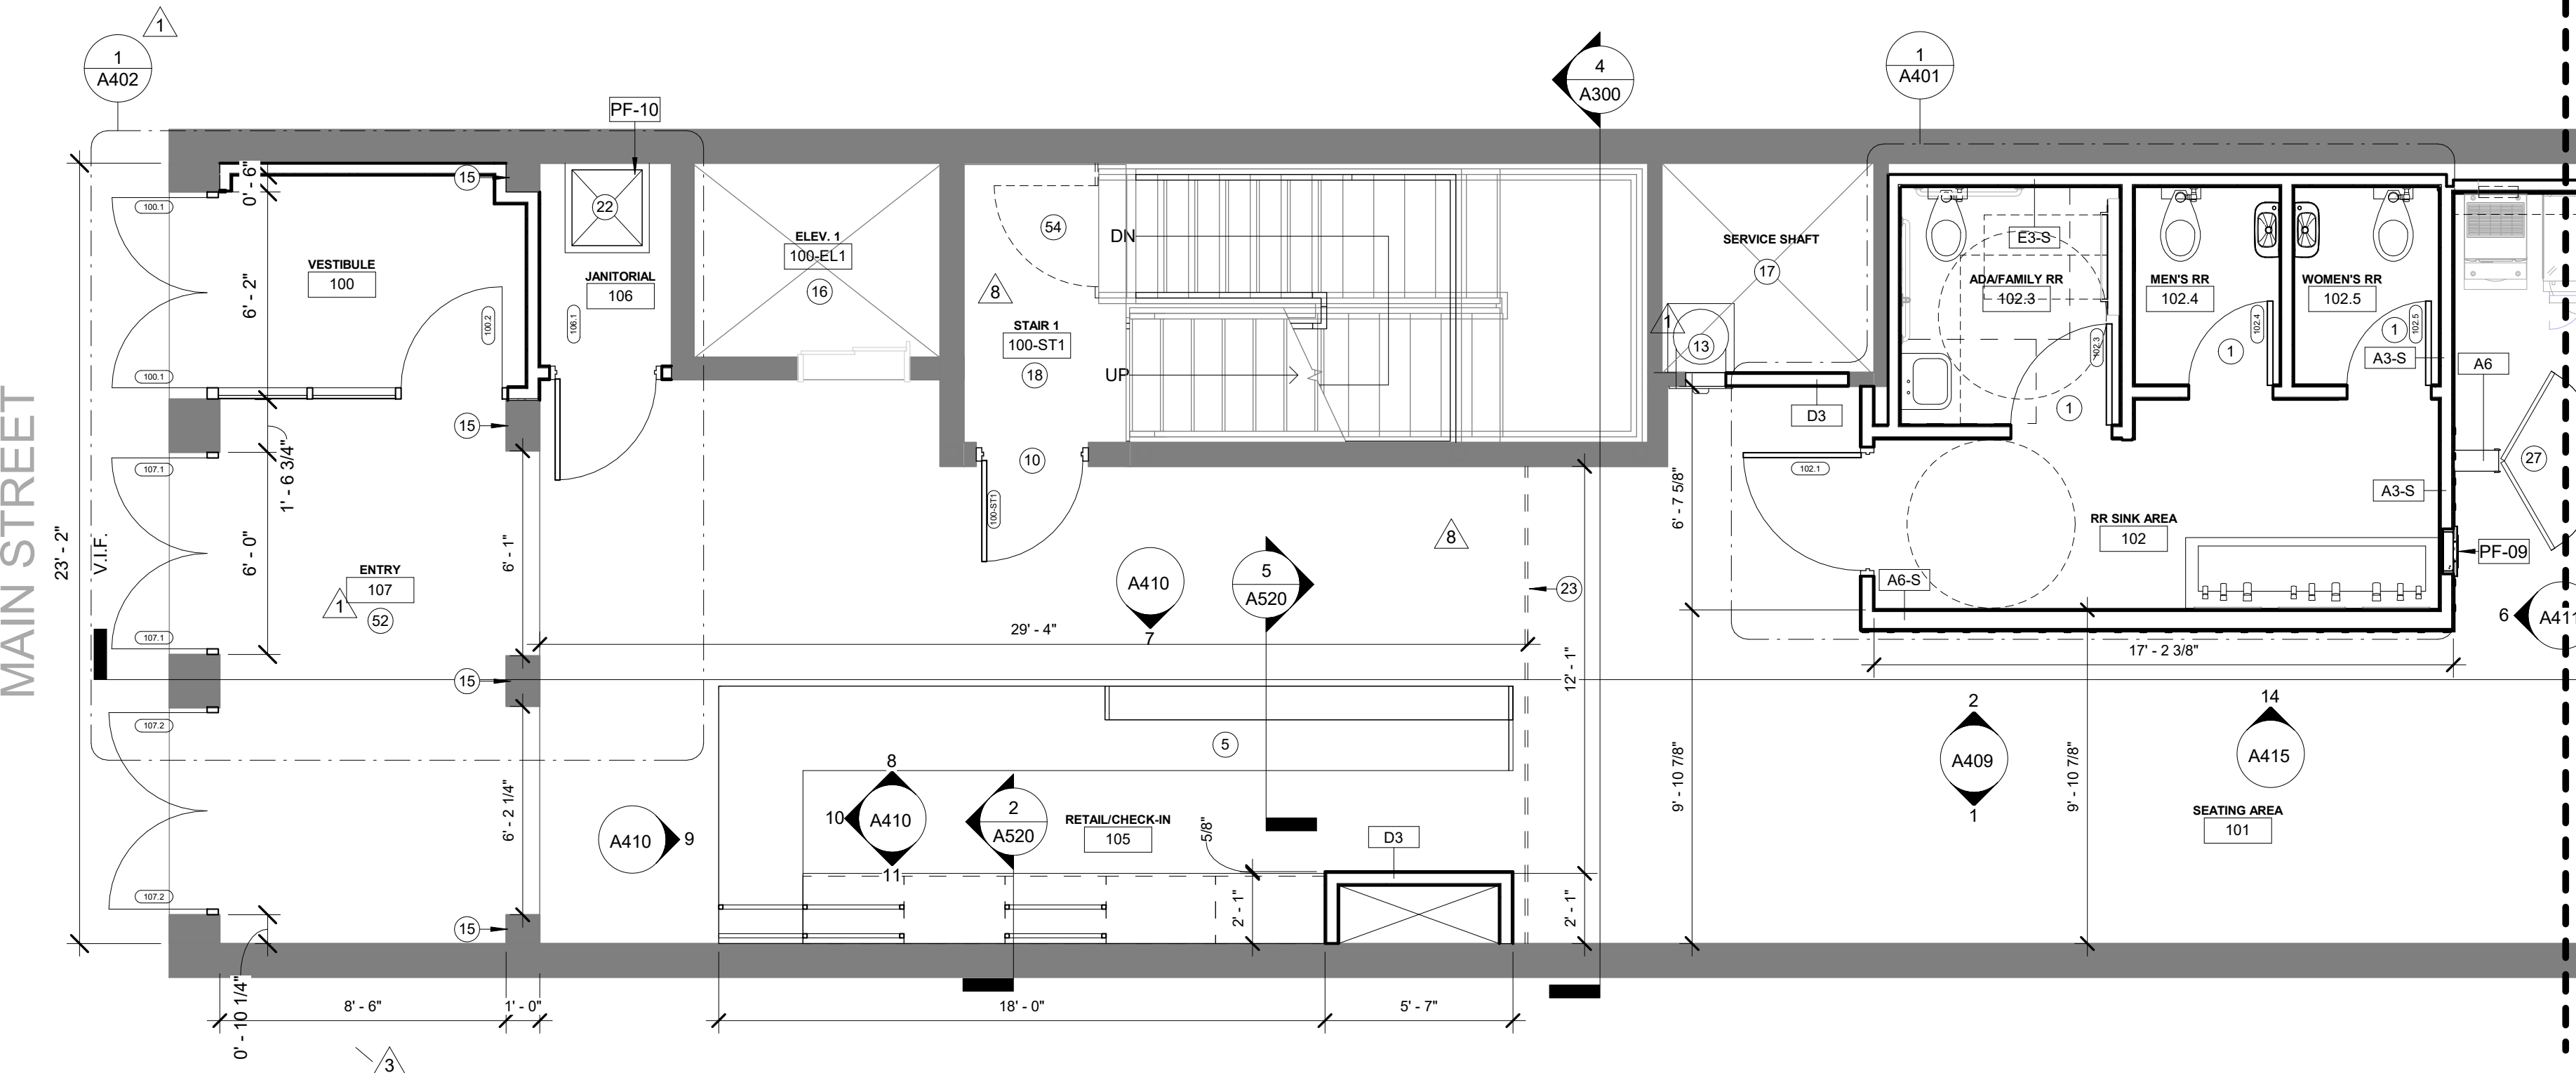

2 ARCHITECTURAL PLAN - LEVEL 01 - SOUTH
A101 1/4" = 1'-0"

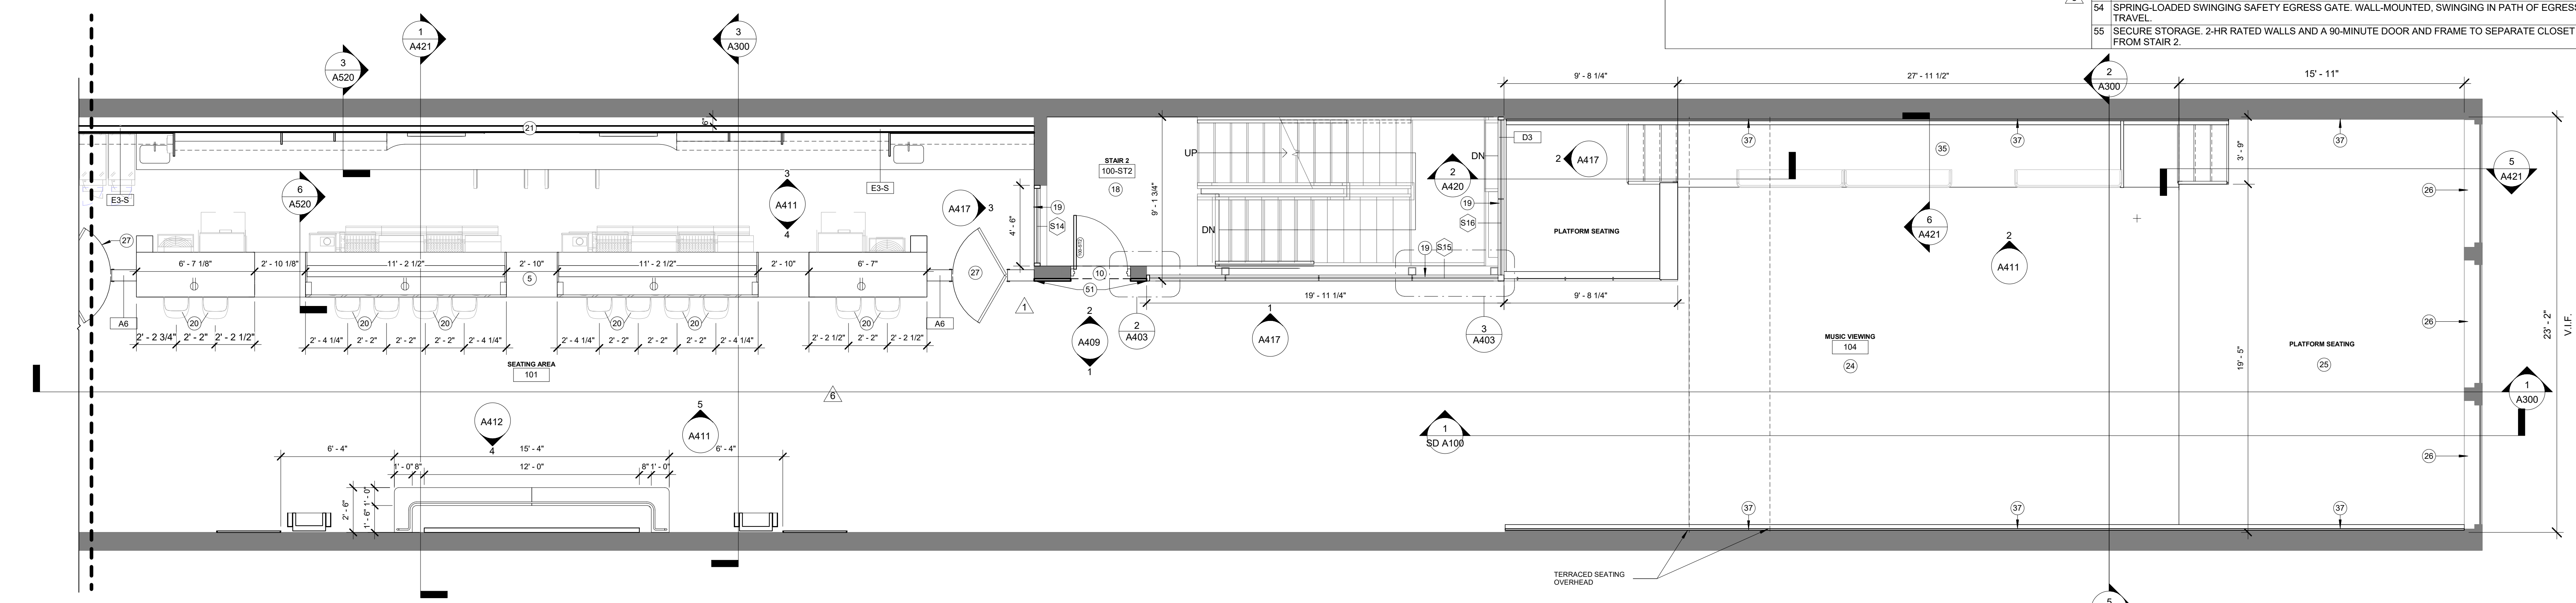

1 ARCHITECTURAL PLAN - LEVEL 01 - NORTH
A101 1/4" = 1'-0"



10 W MARKET ST
SUITE 800
INDIANAPOLIS, IN 46204
P: 317.614.0055
F: 317.632.5662
DKGR.COM

OWNER:
THE NUMBERS HOLDING COMPANY

3560 CHESTNUT PLACE
DENVER, CO 80202
P: 303.493.0551
www.numbersgroup.com

STRUCTURAL ENGINEER
KPFF
135 S. 6TH STREET
SUITE 200
LOUISVILLE, KY 40202
P: 502.325.0100
www.kpff.com

MEP ENGINEER
CIRCLE DESIGN GROUP
8226 DELEGATES ROW
SUITE 100
INDIANAPOLIS, IN 46240
P: 317.253.2022
www.circle-design.com


CIVIL ENGINEER
LAND DESIGN & DEVELOPMENT
503 WASHBURN AVENUE
SUITE 100
LOUISVILLE, KY 40202
P: 502.408.8174
www.lsd-inc.com

SHEET REVISIONS

#	DESCRIPTION	DATE
1	ISSUED FOR PERMITS	04.19.2022
2	ADD #10	05.13.2022
3	ADD #11	05.19.2022
4	ADD #12	05.23.2022

NUMBER 15 ENTERTAINMENT VENUE
121 West Main St
Louisville, KY 40202

DATE:
04.19.2022
PROJECT #:
2021-016

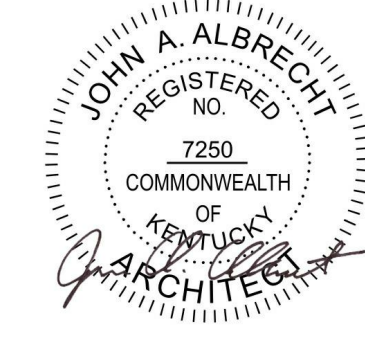


FLOOR PLAN - LEVEL 01


SHEET NO
A101

CHECKED BY: Author DRAWN BY: Checker

PLAN KEY

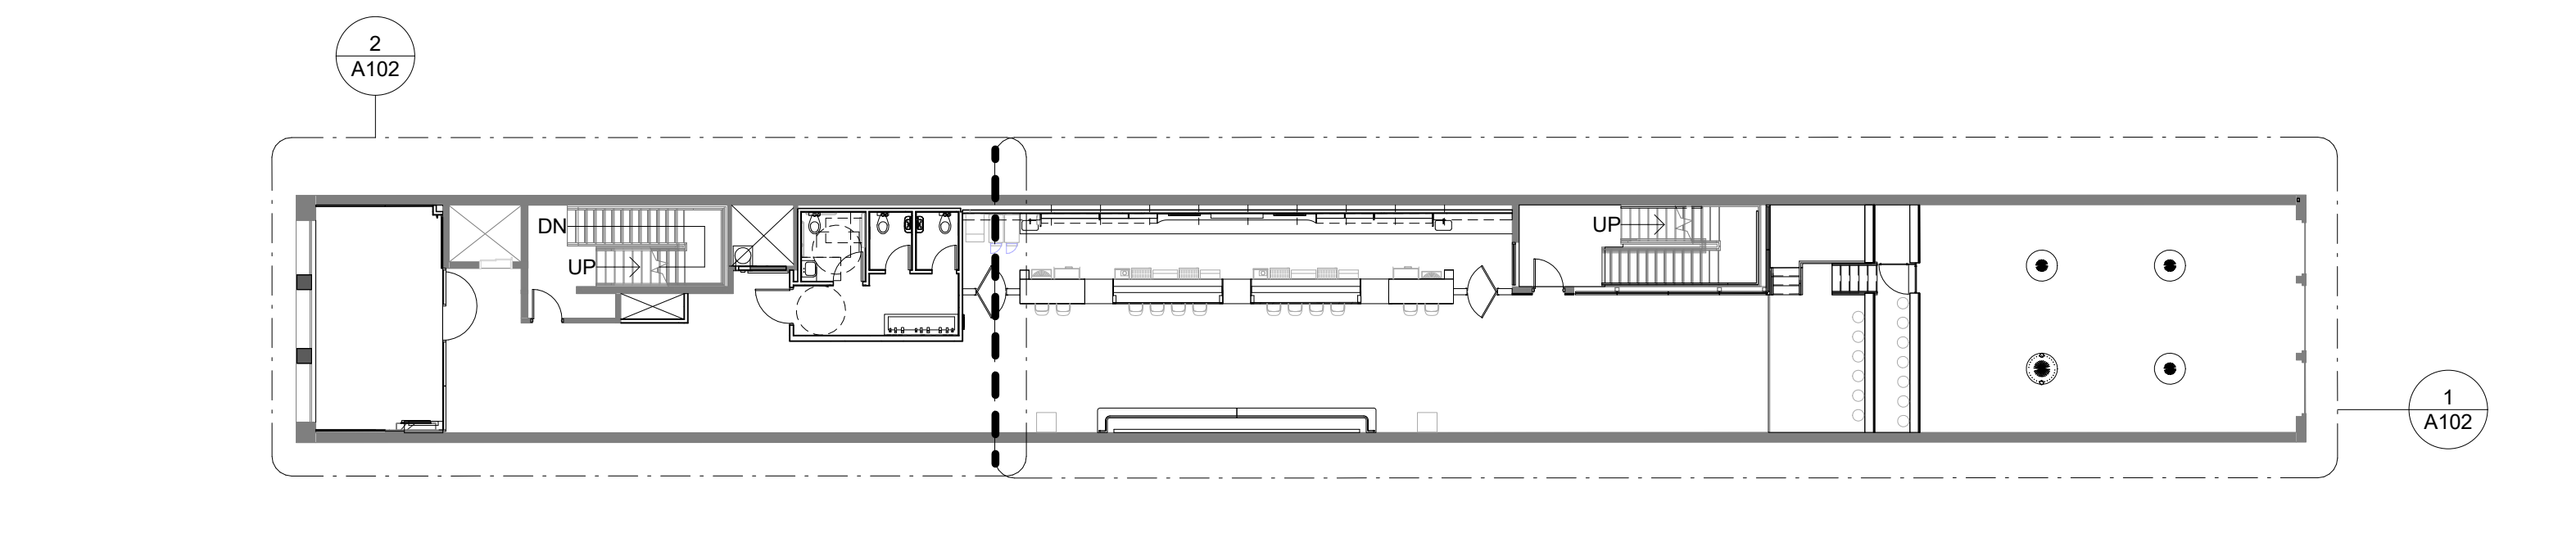

BUILDING KEY

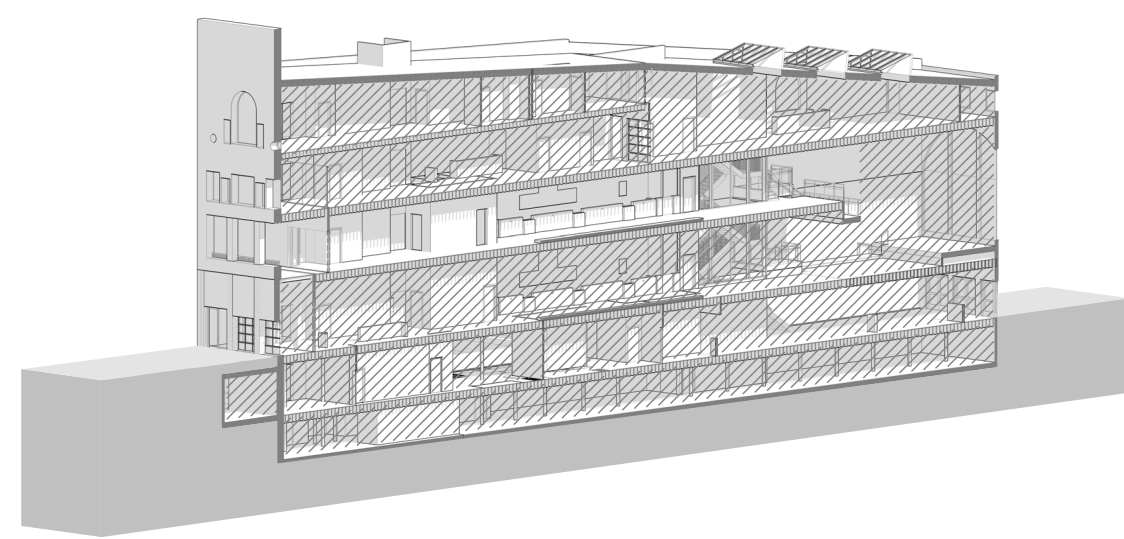

GENERAL PLAN NOTES

- EXISTING WALL(S) TO REMAIN
 - NEW WALL WHERE INDICATED
- A. ALL NEW WALLS TO BE TYPE A3-S UNLESS NOTED OTHERWISE
- B. WOOD FLOORING FINISH UNLESS NOTED OTHERWISE. ASSUME \$13/SF MATERIAL ALLOWANCE.
- C. PERIMETER WALLS SCOPE:
 - EXISTING BRICK TO BE CLEANED AND TUCK POINTED WHERE NECESSARY.
 - FINISHED WITH CLEAR MATTE SEALER.
 - EXISTING CONCRETE TO BE CLEANED AND PAINTED

GENERAL FINISH NOTES

- A. ALL NEW WALLS ARE PAINT, U.N.O.
- B. LEVEL & FINISH OF GYP. BD. WALLS AND SOFFITS TO BE LEVEL 4 FINISH, U.N.O.
- C. ALL GYP. BOARD CEILINGS TO BE PAINTED, U.N.O.
- D. CARPET SEAMS TO BE LOCATED AT CENTERLINE OF DOOR IN CLOSED POSITION.
- E. ALIGN FLOORING TRANSITIONS WITH FINISH BASE EXCEPT AT DOORS, U.N.O.
- F. ALL TRANSITION/REDUCER STRIPS AND OTHER THRESHOLDS TO BE LOCATED AT CENTERLINE OF DOOR WHEN IN CLOSED POSITION
- G. ALL REQUIRED FLOORING PREPARATIONS SHALL BE BY FLOORING CONTRACTOR.
- H. PAINT ALL HOLLOW METAL DOOR FRAMES P3, U.N.O.
- I. SEAL AROUND ALL DOOR FRAMES AND CASEWORK WITH COLOR TO MATCH WALL.
- J. ALL PLASTIC LAMINATE ON VERTICAL SURFACES TO RUN VERTICALLY.
- K. PAINT WALLS: EGG-SHELL
PAINT CEILINGS: FLAT
PAINT DOOR FRAMES/TRIM: SATIN
- L. ALL FINISH MATERIAL SAMPLES AND PRODUCT DATA ARE TO BE SUBMITTED TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.

PLUMBING FIXTURE SCHEDULE

MARK	MANUFACTURER	MODEL	DESCRIPTION
PF-08	DAYTON OR EQ. KRAUS	--	HAND SINK - COUNTER-MOUNTED SINGLE BOWL STAINLESS SINK, 20" X 18" KRAUS BOLDFEN PULL OUT FAUCET + SOAP DISPENSER
PF-09	ELKAY	LBWDC08K C	42"X20" LV PRO COMMERCIAL BUILT-IN WATER DISPENSER - REMOTE FILTER CONFIGURATION
PF-10	EAGLE GROUP OR EQ.	F2820-12; 321561; 312669; 312660; 503099 OR 503098	MOP SINK BOWL, 4-POLE MOP HOLDER, HOSE & BRACKET, SERVICE FAUCET, AND RIGHT/REAR OR LEFT/REAR 16" SPLASH KIT
PF-11	HOSE BIB	--	HOSE BIB, MOUNT 12" FROM FFE

*REFER TO A401 & A415 FOR RESTROOM FIXTURE SCHEDULE

PLAN NOTES



- GC TO VERIFY STRUCTURAL JOIST LOCATIONS BELOW AND RELOCATE TOILETS AS NECESSARY TO AVOID PLUMBING CONFLICTS. TOILETS TO BE CENTERED BETWEEN TOILET PARTITION WALLS. REFER TO FINISH PLANS FOR FLOOR AND WALL TREATMENT. GENERAL MOUNTING HEIGHTS CAN BE FOUND ON G002.
- COOLER/FREEZER UNIT BY FSE VENDOR (OWNER CONTRACT). UNIT SIZE APPROX. BY PLANS. UNIT HEIGHT APPROX. 8' TALL.
- APPROX. 8' TALL COOLER/FREEZER/KEG ROOM. UNIT BY FSE VENDOR (OWNER CONTRACT).
- TV BY OWNER. MOUNT AT 60" AFF ON CENTER U.N.O. PROVIDE MOUNTING BRACKET. COORDINATE TV AND BRACKET SIZING WITH OWNER.
- FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- NEW PARTITION WALL TO REPLACE DEMOLISHED. ALIGN TO PREVIOUS LOCATION.
- ALL TRASH/RECYCLE SERVICE AND STORAGE EQUIPMENT TO BE PROVIDED BY OWNER. ALL WALL COVERING TO BE WATER-RESISTANT. ALL FLOOR DRAIN AND SLOPE ALL FLOORING TO DRAIN. REFER TO PLUMBING FOR DRAIN SIZE AND LOCATION. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- HOLLOW METAL DOOR INSTALLED IN EXISTING HOLLOW METAL FRAME. GC TO NOTIFY ARCHITECT IF FRAMES DO NOT MEET FIRE RATING REQUIREMENTS.
- 4' X 8' DOUBLE-ACTING KITCHEN DOOR. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 24" DIAMETER TRASH CHUTE WITH DRAIN AND HOSEBIB AT GROUND LEVEL. TRASH CHUTE IN 2-HR RATED ENCLOSURE. PROVIDE MIN. RATED CHUTE-TYPE FIRE DOOR AT FLOORS 05-04 (BASIS OF DESIGN: CHUTES INTERNATIONAL) CHUTE DOOR TO MEET UL CERTIFICATION NO. GSPR R21689. TRASH CHUTE SANITIZER LOCATED ON LEVEL 04. REFER TO PLUMBING AND SPECIFICATIONS FOR FURTHER INFORMATION.
- 6' X 10' EXTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- RESTORE EXISTING COLUMN. LIGHTLY SAND AREAS OF WOOD AND REFINISH WITH STAIN. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- EXISTING ELEVATOR TO REMAIN. MAINTENANCE AS NECESSARY TO RESUME SERVICE. ALL NEW CAB FINISHES - SNABAC MODERN 1 STYLE. REPLACE EXISTING LAMINATE WITH P.L8 (SNABAC) STANDARD FINISH. NEW W/O1 FLOORING PATCH AND REPAIR EXISTING CEILING AS NECESSARY. REPAINT ELEVATOR DOORS AND TRIM - PAINT COLOR SPEC AT EACH LEVEL TO BE DISCUSSED ON SITE.
- EXISTING FREIGHT HOISTWAY TO BE UTILIZED FOR VERTICAL INFRASTRUCTURE RUNS. REFER TO MEP DRAWINGS FOR LOCATIONS AND SIZES.
- EXISTING WALL-MOUNTED HANDRAILS TO BE REPLACED WITH NEW CODE COMPLIANT PIPE HANDRAILS (SIMILAR TO EXISTING). INTERIOR STAIR MOUNTED HANDRAILS TO REMAIN. ALL STEEL STRINGERS, HANDRAILS, RISERS AND OTHER EXPOSED ELEMENTS TO BE FIELD PAINTED P3. AREAS OF EXPOSED BRICK OR CMU TO BE FURRED OUT AND DRYWALLED. REFER TO FINISH SCHEDULE FOR FURTHER INFORMATION.
- NEW INTERIOR ALUMINUM CURTAIN WALL SYSTEM IN LOCATIONS INDICATED. MODIFY SPRINKLER SYSTEM TO CREATE SPRINKLER CURTAIN AT THESE LOCATIONS TO MAINTAIN RATED ENCLOSURE (TYCO MODEL WS OR EQUAL). REFER TO PLUMBING FOR FURTHER INFORMATION.
- FURR OUT WALL. HOLD STUDS 6" FROM EXISTING FACE TO ALLOW CHASE FOR BEER LINES AND VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION. FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- JANITOR CLOSET W/ MOP SINK
- FOLDING SECURITY GATE TO BE CLOSED DURING NON-OPERATIONAL HOURS OF ASSEMBLY SPACE TO CREATE REASONABLE SEPARATION FROM RESIDENTIAL USER EGRESS FROM STAIR 1. BY ULINE OR EQUAL.
- NEW FLOOR FRAMING IN THIS AREA. FFE TO BE FLUSH WITH THE EXISTING FLOOR. SEE FINISH PLANS FOR FLOOR TREATMENT SCHEDULE. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- PLATFORM SEATING OVERBUILD IN AREA INDICATED. SEE SECTIONS. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- ALL EXISTING HISTORIC WINDOWS TO BE REPAIRED AND RESTORED IN PLACE. ALL FORMER REPLACEMENT WINDOWS TO BE REMOVED AND REPLACED WITH HISTORIC REPLICA WINDOWS OF SIMILAR ERA AND STYLE TO ORIGINAL WINDOWS. REFER TO A604 FOR APPROXIMATE MEASUREMENTS. GC TO VERIFY IN FIELD.
- 3'-0" X 3'-0" DOUBLE-ACTING SWING DOORS. BASIS OF DESIGN: RUSTICA OR APPROVED EQUAL.
- STOREFRONT WALL W/ INTERM MANDOOR.
- INTERIOR ALUMINUM STOREFRONT SYSTEM. REFER TO STOREFRONT ELEVATIONS FOR FURTHER INFORMATION.
- MOSAIC TILE FLOORING IN SHOWER. PROVIDE ADEQUATE WATERPROOFING AND SLOPING CONDITIONS.
- 8' X 10' INTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- TIERED FLOOR EXTENSION LOWERED 42" FROM FFE. MUSIC VIEWING TERRACE GUARDRAIL TO BE PROVIDED BY SPHON ASSOCIATES. RAILING TO BE BLACK WITH METAL DRINK TOPPER. BASIS OF DESIGN: HOLLANDER - QUAD AL. METAL PANEL INFILL TO BE CHOSEN FROM GR3 METAL FABRICS FULL SELECTION OF PATTERNS. FINISHED FACE OF DRINK PLATFORM TO REACH 36" MIN. TERRACE FRAMING TIED TO EXISTING PERIMETER WALLS TO AVOID COLUMNS BELOW. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
- RESTORE EXISTING CEILING AND WALL CONDITIONS AS INDICATED ON A210. INSTALL NEW PORCELAIN TILE FLOORING OVER WEATHERPROOF MEMBRANE. FLOOR PREP TO PROVIDE MINIMAL SLOPE TO DRAIN AS POSSIBLE. REFER TO PLUMBING DRAWINGS FOR DRAIN LOCATION AND SIZE.
- EXISTING BRICK FIREPLACE TO REMAIN AND BE RESTORED. AREAS OF BRICK TO BE TUCKPOINTED. PAINTED MASONRY BLOCK TO BE TUCKPOINTED AND REPAINTED. WOOD MANTLE TO BE Sanded AND RESEALED. PAINT P11. VENTLESS GAS FIREPLACE TO BE INSTALLED. BASIS OF DESIGN MOTIGO H8W0. SINGLE SIDED VENTLESS FIREPLACE INSERT. REFER TO MEP FOR GAS AND ELECTRICAL REQUIREMENTS.
- RAISED PLATFORM SEATING OVERBUILD. 6" FROM EXISTING FFE.
- AREA RESERVED FOR DJ MIXING BOOTH. REFER TO ELEC FOR SCOPE. FINISHES TO MATCH SURROUNDING. AREA SEPARATED BY 3'-0" SWING GATE.
- INFILL EXISTING WAINSCOTING AS INDICATED ON ELEVATIONS. REFER TO FINISH PLANS FOR MORE INFORMATION.
- LINE OF SAWTOOTH SKYLIGHT ABOVE. 8'-0" X 12'-0. REFER TO A105 FOR FURTHER INFORMATION.
- NEW ROOF ACCESS LADDER
- RAISED FLOOR PLATFORM 2'-0" FROM EXISTING FFE. RAILING TO BE METAL SCREEN FILL WITH DRINK RAIL/PLATFORM ON TOP. FINISHED FACE OF DRINK PLATFORM TO REACH 36" MIN.
- STACKED WASHER/DRYER UNIT BY OWNER. REFER TO MEP FOR HOOK-UP LOCATIONS.
- KITCHENETTE APPLIANCES IN GENERAL CONTRACTORS PACKAGE. REFER TO MEP FOR HOOK-UP LOCATIONS.
- LINE OF NEW ROOF ACCESS HATCH ABOVE.
- FIXED STADIUM SEATING. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- MAINTENANCE PLATFORM. SERVICE-GRADE STEEL FLOOR TO BE INSTALLED FLUSH WITH FFE.
- EXISTING BUILDING CONDITIONS TO BE CLEANED, REPAIRED OR PATCHED IN PREPARATION FOR NEW FINISHES. REMOVE ALL DEBRIS AND DECOMMISSIONED EQUIPMENT. WOODEN SHELVING TO BE REMOVED THROUGHOUT.
- FURR OUT WALL. HOLD STUDS 4" FROM EXISTING FACE BEHIND RESTROOMS TO ALLOW CHASE FOR VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION.
- FURR OUT EXISTING WALL AS NEEDED. FINISH FACE TO BE FLUSH WITH ADJACENT SPRINKLER CURTAIN WALL MULLION AND NEW KNEE WALL.
- EXISTING HISTORIC MOSAIC TILE AND CONCRETE SURROUND. REPAIR AND RESTORE IN PLACE.
- EXISTING GUARDRAIL TO BE MODIFIED TO MEET 42" AFF. CODE COMPLIANT HEIGHT.
- SPRING-LOADED SWINGING SAFETY EGRESS GATE. WALL-MOUNTED, SWINGING IN PATH OF EGRESS TRAVEL.
- SECURE STORAGE. 2-HR RATED WALLS AND A 90-MINUTE DOOR AND FRAME TO SEPARATE CLOSET FROM STAIR 2.

2 ARCHITECTURAL PLAN - LEVEL 02 - SOUTH



PLAN KEY

BUILDING KEY

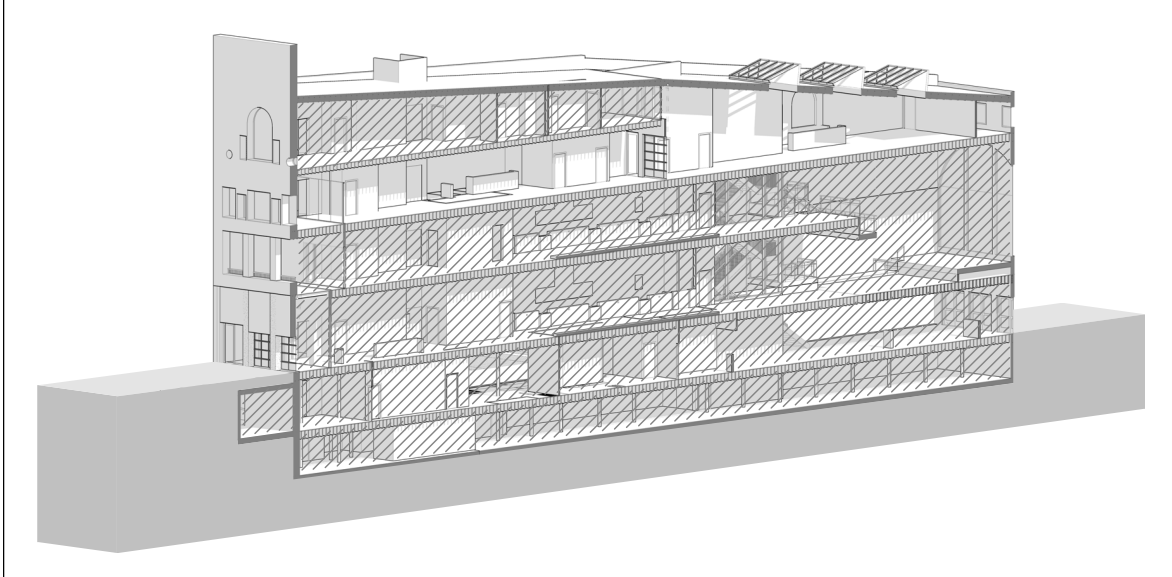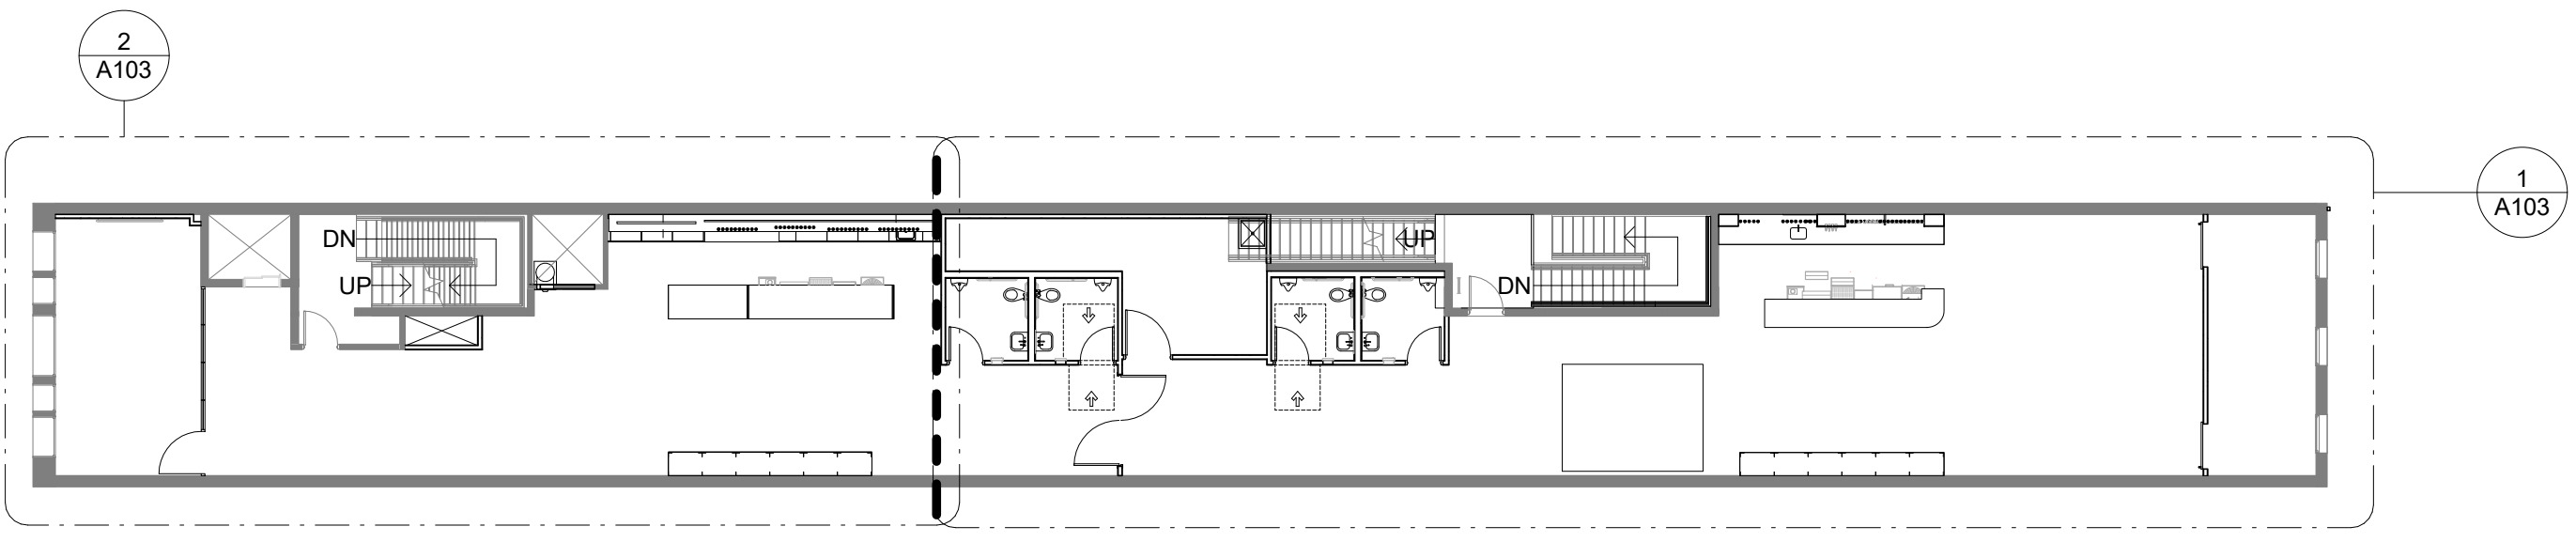

GENERAL PLAN NOTES

- EXISTING WALL(S) TO REMAIN
 - NEW WALL WHERE INDICATED
- A. ALL NEW WALLS TO BE TYPE A3-S UNLESS NOTED OTHERWISE
- B. WOOD FLOORING FINISH UNLESS NOTED OTHERWISE. ASSUME \$13/SF MATERIAL ALLOWANCE.
- C. PERIMETER WALLS SCOPE:
 - EXISTING BRICK TO BE CLEANED AND TUCK POINTED WHERE NECESSARY.
 - FINISHED WITH CLEAR MATTE SEALER.
 - EXISTING CONCRETE TO BE CLEANED AND PAINTED

PLAN NOTES

- 1 GC TO VERIFY STRUCTURAL JOIST LOCATIONS BELOW AND RELOCATE TOILETS AS NECESSARY TO AVOID PLUMBING CONFLICTS. TOILETS TO BE CENTERED BETWEEN TOILET PARTITION WALLS. REFER TO FINISH PLANS FOR FLOOR AND WALL TREATMENT. GENERAL MOUNTING HEIGHTS CAN BE FOUND ON G002.
- 2 COOLER/FREEZER UNIT BY FSE VENDOR (OWNER CONTRACT). UNIT SIZE APPROX. BY PLANS. UNIT HEIGHT APPROX. 8' TALL.
- 3 APPROX. 8' TALL COOLER/FREEZER/KEG ROOM. UNIT BY FSE VENDOR (OWNER CONTRACT).
- 4 TV BY OWNER. MOUNT AT 60" AFF ON CENTER U.N.O. PROVIDE MOUNTING BRACKET. COORDINATE TV AND BRACKET SIZING WITH OWNER.
- 5 FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- 6 NEW PARTITION WALL TO REPLACE DEMOLISHED. ALIGN TO PREVIOUS LOCATION.
- 7 ALL TRASH/RECYCLE SERVICE AND STORAGE EQUIPMENT TO BE PROVIDED BY OWNER. ALL WALL COVERING TO BE WATER-RESISTANT. ALL FLOOR DRAIN AND SLOPE ALL FLOORING TO DRAIN. REFER TO PLUMBING FOR DRAIN SIZE AND LOCATION. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 8 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 9 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 10 HOLLOW METAL DOOR INSTALLED IN EXISTING HOLLOW METAL FRAME. GC TO NOTIFY ARCHITECT IF FRAMES DO NOT MEET FIRE RATING REQUIREMENTS.
- 11 4' X 8' DOUBLE-ACTING KITCHEN DOOR. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- 12 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION.
- 13 24" DIAMETER TRASH CHUTE WITH DRAIN AND HOSEBIB AT GROUND LEVEL. TRASH CHUTE IN 2-HR RATED ENCLOSURE. PROVIDE MIN. RATED CHUTE-TYPE FIRE DOOR AT FLOORS 05-04 (BASIS OF DESIGN: CHUTES INTERNATIONAL) CHUTE DOOR TO MEET UL CERTIFICATION NO. QSPR R21689. TRASH CHUTE SANITIZER LOCATED ON LEVEL 04. REFER TO PLUMBING AND SPECIFICATIONS FOR FURTHER INFORMATION.
- 14 6' X 10' EXTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- 15 RESTORE EXISTING COLUMN. LIGHTLY SAND AREAS OF WOOD AND REFINISH WITH STAIN. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 16 EXISTING ELEVATOR TO REMAIN. MAINTENANCE AS NECESSARY TO RESUME SERVICE. ALL NEW CAB FINISHES - SNABAC MODERN 1 STYLE. REPLACE EXISTING LAMINATE WITH P.L8 (SNABAC STANDARD FINISH). NEW W/OI FLOORING PATCH AND REPAIR EXISTING CEILING AS NECESSARY. REPAINT ELEVATOR DOORS AND TRIM - PAINT COLOR SPEC AT EACH LEVEL TO BE DISCUSSED ON SITE.
- 17 EXISTING FREIGHT HOISTWAY TO BE UTILIZED FOR VERTICAL INFRASTRUCTURE RUNS. REFER TO MEP DRAWINGS FOR LOCATIONS AND SIZES.
- 18 EXISTING WALL-MOUNTED HANDRAILS TO BE REPLACED WITH NEW CODE COMPLIANT PIPE HANDRAILS (SIMILAR TO EXISTING). INTERIOR STAIR MOUNTED HANDRAILS TO REMAIN. ALL STEEL STRINGERS, HANDRAILS, RISERS AND OTHER EXPOSED ELEMENTS TO BE FIELD PAINTED P3. AREAS OF EXPOSED BRICK OR CMU TO BE FURRED OUT AND DRYWALLED. REFER TO FINISH SCHEDULE FOR FURTHER INFORMATION.
- 19 NEW INTERIOR ALUMINUM CURTAIN WALL SYSTEM IN LOCATIONS INDICATED. MODIFY SPRINKLER SYSTEM TO CREATE SPRINKLER CURTAIN AT THESE LOCATIONS TO MAINTAIN RATED ENCLOSURE (TYCO MODEL WS OR EQUAL). REFER TO PLUMBING FOR FURTHER INFORMATION.
- 20 REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 21 FUR OUT WALL. HOLD STUDS 6" FROM EXISTING FACE TO ALLOW CHASE FOR BEER LINES AND VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION. FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS.
- 22 JANITOR CLOSET W/ MOP SINK
- 23 FOLDING SECURITY GATE TO BE CLOSED DURING NON-OPERATIONAL HOURS OF ASSEMBLY SPACE TO CREATE REASONABLE SEPARATION FROM RESIDENTIAL USER EGRESS FROM STAIR 1. BY ULINE OR EQUAL.
- 24 NEW FLOOR FRAMING IN THIS AREA. FFE TO BE FLUSH WITH THE EXISTING FLOOR. SEE FINISH PLANS FOR FLOOR TREATMENT. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- 25 PLATFORM SEATING OVERBUILD IN AREA INDICATED. SEE SECTIONS. REFER TO STRUCTURAL FOR FURTHER INFORMATION.
- 26 ALL EXISTING HISTORIC WINDOWS TO BE REPAIRED AND REPLACED IN PLACE. ALL FORMER REPLACEMENT WINDOWS TO BE REMOVED AND RESTORED WITH HISTORIC REPLICA WINDOWS OF SIMILAR ERA AND STYLE TO ORIGINAL WINDOWS. REFER TO A604 FOR APPROXIMATE MEASUREMENTS. GC TO VERIFY IN FIELD.
- 27 3'-0" X 3'-0" DOUBLE-ACTING SWING DOORS. BASIS OF DESIGN: RUSTICA OR APPROVED EQUAL.
- 28 STOREFRONT WALL W/ INTERM MANDOOR.
- 29 INTERIOR ALUMINUM STOREFRONT SYSTEM. REFER TO STOREFRONT ELEVATIONS FOR FURTHER INFORMATION.
- 30 MOSAIC TILE FLOORING IN SHOWER. PROVIDE ADEQUATE WATERPROOFING AND SLOPING CONDITIONS.
- 31 8' X 10' INTERIOR ALUMINUM/GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION.
- 32 TIERED FLOOR EXTENSION LOWERED 42" FROM FFE. MUSIC VIEWING TERRACE GUARDRAIL TO BE PROVIDED BY SPHON ASSOCIATES. RAILING TO BE BLACK WITH METAL DRINK TOPPER. BASIS OF DESIGN: HOLLANDER - QUAD AL. METAL PANEL INFILL TO BE CHOSEN FROM GR3 METAL FABRICS FULL SELECTION OF PATTERNS. FINISHED FACE OF DRINK PLATFORM TO REACH 36" MIN. TERRACE FRAMING TIED TO EXISTING PERIMETER WALLS TO AVOID COLUMNS BELOW. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
- 33 RESTORE EXISTING CEILING AND WALL CONDITIONS AS INDICATED ON A210. INSTALL NEW PORCELAIN TILE FLOORING OVER WEATHERPROOF MEMBRANE. FLOOR PREP TO PROVIDE MINIMAL SLOPE TO DRAIN AS POSSIBLE. REFER TO PLUMBING DRAWINGS FOR DRAIN LOCATION AND SIZE.
- 34 EXISTING BRICK FIREPLACE TO REMAIN AND BE RESTORED. AREAS OF BRICK TO BE TUCKPOINTED. PAINTED MASONRY BLOCK TO BE TUCKPOINTED AND REPAINTED. WOOD MANTEL TO BE SANDED AND RESEALED. PAINT P11. VENTLESS GAS FIREPLACE TO BE INSTALLED. BASIS OF DESIGN MOTIGO HSNVO. SINGLE SIDED VENTLESS FIREPLACE INSERT. REFER TO MEP FOR GAS AND ELECTRICAL REQUIREMENTS.
- 35 RAISED PLATFORM SEATING OVERBUILD. 6" FROM EXISTING FFE.
- 36 AREA RESERVED FOR DJ MIXING BOOTH. REFER TO ELEC FOR SCOPE. FINISHES TO MATCH SURROUNDING. AREA SEPARATED BY 3'-0" SWING GATE.
- 37 INFILL EXISTING WAINSCOTING AS INDICATED ON ELEVATIONS. REFER TO FINISH PLANS FOR MORE INFORMATION.
- 38 LINE OF SAWTOOTH SKYLIGHT ABOVE. 8'-0" X 12'-0. REFER TO A105 FOR FURTHER INFORMATION.
- 39 NEW ROOF ACCESS LADDER
- 41 RAISED FLOOR PLATFORM 2'-0" FROM EXISTING FFE. RAILING TO BE METAL. SCREEN FILL WITH DRINK RAIL/PLATFORM ON TOP. FINISHED FACE OF DRINK PLATFORM TO REACH 36" MIN.
- 42 STACKED WASHER/DRYER UNIT BY OWNER. REFER TO MEP FOR HOOK-UP LOCATIONS.
- 43 KITCHENETTE APPLIANCES IN GENERAL CONTRACTORS PACKAGE. REFER TO MEP FOR HOOK-UP LOCATIONS.
- 44 LINE OF NEW ROOF ACCESS HATCH ABOVE.
- 45 FIXED STADIUM SEATING. REFER TO FINISH PLANS FOR FURTHER INFORMATION.
- 46 MAINTENANCE PLATFORM. SERVICE-GRADE STEEL FLOOR TO BE INSTALLED FLUSH WITH FFE.
- 48 EXISTING BUILDING CONDITIONS TO BE CLEANED, REPAIRED OR PATCHED IN PREPARATION FOR NEW FINISHES. REMOVE ALL DEBRIS AND DECOMMISSIONED EQUIPMENT. WOODEN SHELVING TO BE REMOVED THROUGHOUT.
- 49 FUR OUT WALL. HOLD STUDS 4" FROM EXISTING FACE BEHIND RESTROOMS TO ALLOW CHASE FOR VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION.
- 51 FURR OUT EXISTING WALL AS NEEDED. FINISH FACE TO BE FLUSH WITH ADJACENT SPRINKLED CURTAIN WALL. MULLION AND NEW KNEE WALL.
- 52 EXISTING HISTORIC MOSAIC TILE AND CONCRETE SURROUND. REPAIR AND RESTORE IN PLACE.
- 53 EXISTING GUARDRAIL TO BE MODIFIED TO MEET 42" AFF. CODE COMPLIANT HEIGHT.
- 54 SPRING-LOADED SWINGING SAFETY EGRESS GATE. WALL-MOUNTED, SWINGING IN PATH OF EGRESS TRAVEL.
- 55 SECURE STORAGE. 2-HR RATED WALLS AND A 90-MINUTE DOOR AND FRAME TO SEPARATE CLOSET FROM STAIR 2.


EXISTING FINISH NOTES

- A. ALL NEW WALLS ARE PAINT, U.N.O.
- B. LEVEL & FINISH OF GYP. BD. WALLS AND SOFFITS TO BE LEVEL 4 FINISH, U.N.O.
- C. ALL GYP. BOARD CEILINGS TO BE PAINTED, U.N.O.
- D. CARPET SEAMS TO BE LOCATED AT CENTERLINE OF DOOR IN CLOSED POSITION.
- E. ALIGN FLOORING TRANSITIONS WITH FINISH BASE EXCEPT AT DOORS, U.N.O.
- F. ALL TRANSITION/REDUCER STRIPS AND OTHER THRESHOLDS TO BE LOCATED AT CENTERLINE OF DOOR WHEN IN CLOSED POSITION
- G. ALL REQUIRED FLOORING PREPARATIONS SHALL BE BY FLOORING CONTRACTOR.
- H. PAINT ALL HOLLOW METAL DOOR FRAMES P3, U.N.O.
- I. SEAL AROUND ALL DOOR FRAMES AND CASEWORK WITH COLOR TO MATCH WALL.
- J. ALL PLASTIC LAMINATE ON VERTICAL SURFACES TO RUN VERTICALLY.
- K. PAINT WALLS: EGG-SHELL
 PAINT CEILINGS: FLAT
 PAINT DOOR FRAMES/TRIM: SATIN
- L. ALL FINISH MATERIAL SAMPLES AND PRODUCT DATA ARE TO BE SUBMITTED TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.

PLUMBING FIXTURE SCHEDULE


MARK	MANUFACTURER	MODEL	DESCRIPTION
PF-08	DAYTON OR EQ. KRAUS	--	HAND SINK - COUNTER-MOUNTED SINGLE BOWL STAINLESS SINK, 20" X 18" KRAUS BOLDEN PULL OUT FAUCET + SOAP DISPENSER
PF-09	ELKAY	LBWD020BK C	42"X20" LV PRO COMMERCIAL BUILT-IN WATER DISPENSER - REMOTE FILTER CONFIGURATION
PF-10	EAGLE GROUP OR EQ.	F2820-12; 321561; 312669; 312690; 503099 OR 503098	MOP SINK, BOWL, 4-POLE MOP HOLDER, HOSE & BRACKET, SERVICE FAUCET, AND RIGHT/REAR OR LEFT/REAR 16" SPLASH KIT
PF-11	HOSE BIB	--	HOSE BIB, MOUNT 12" FROM FFE

*REFER TO A401 & A415 FOR RESTROOM FIXTURE SCHEDULE

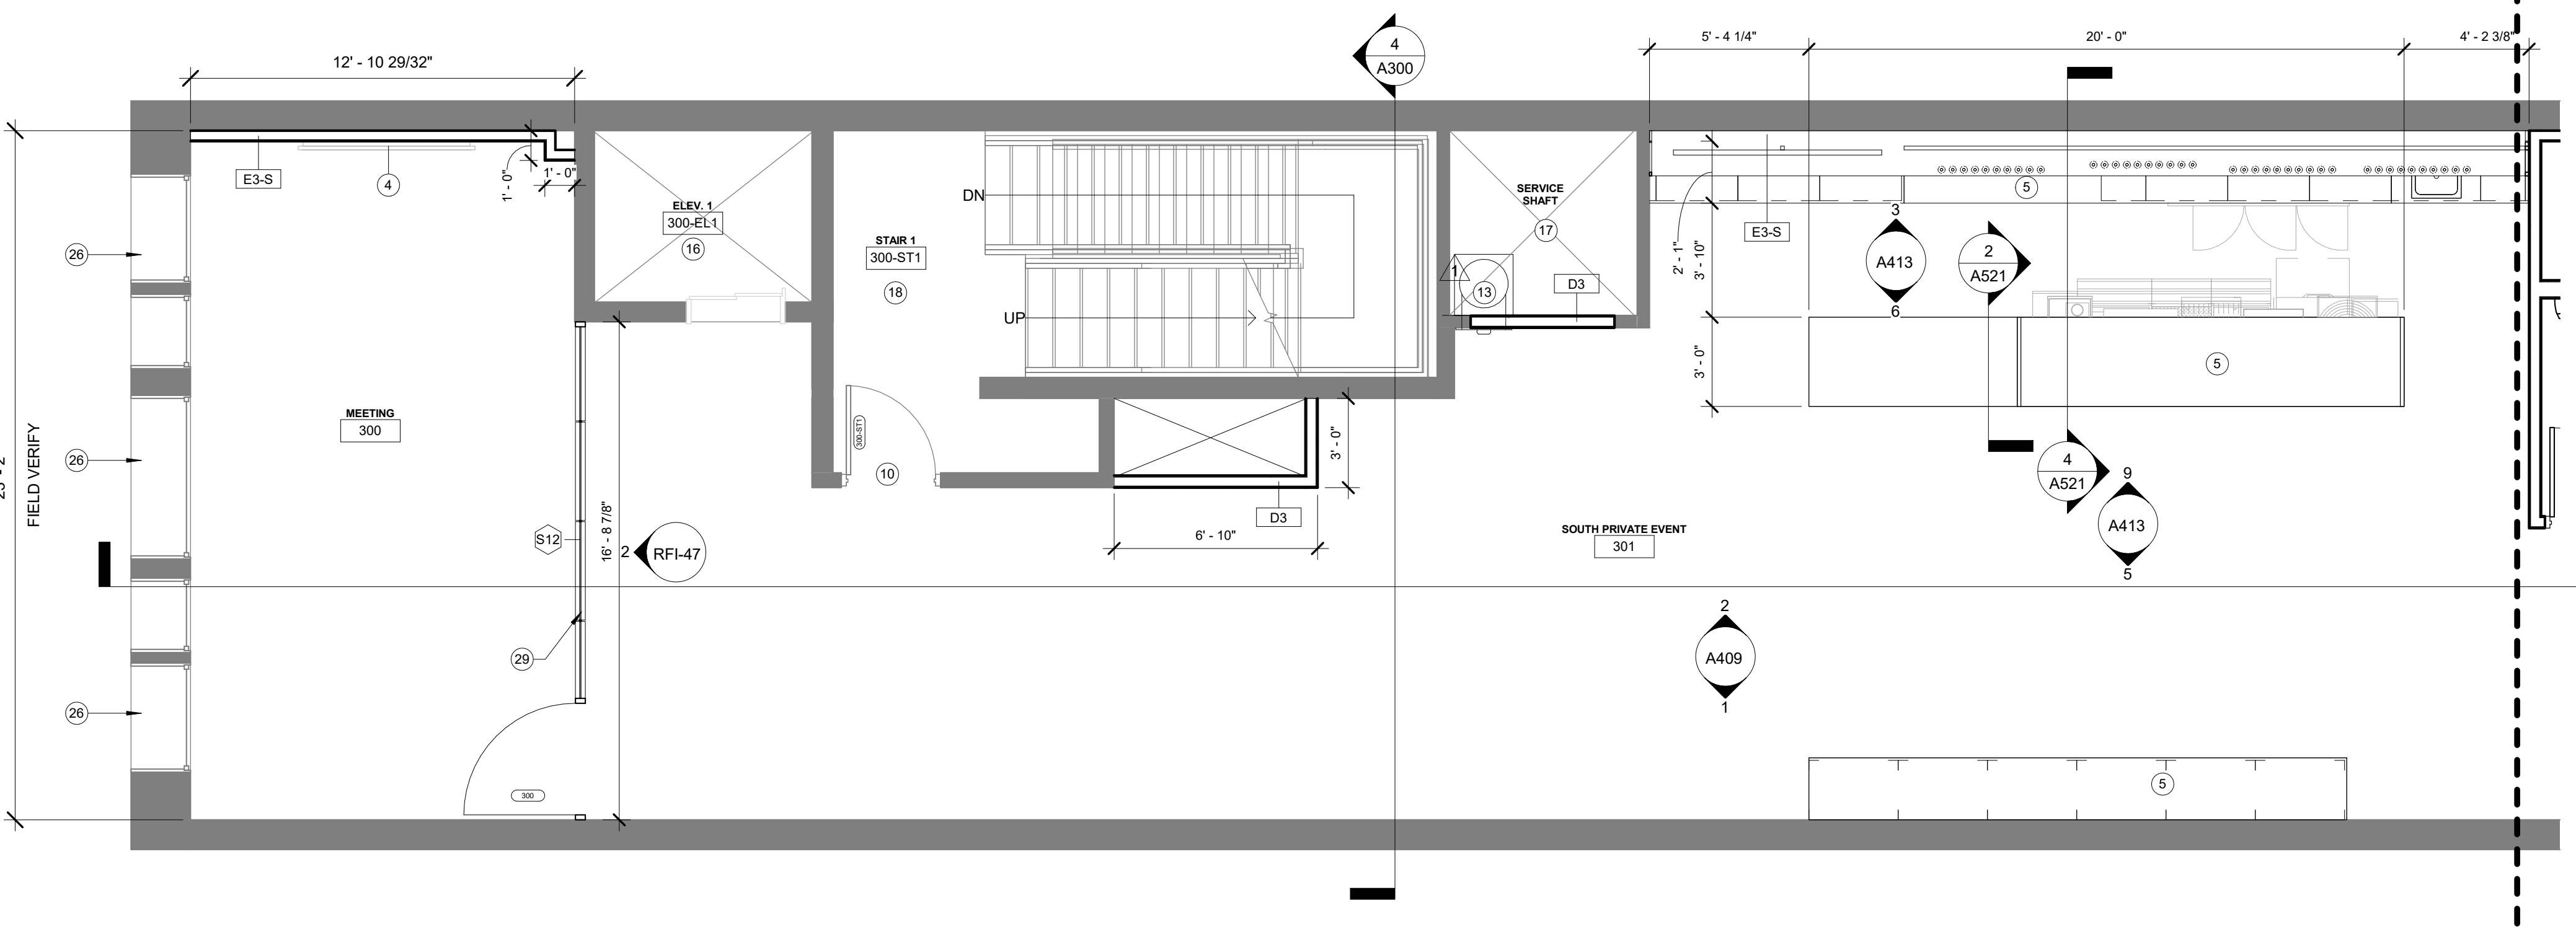

2 ARCHITECTURAL PLAN - LEVEL 03 - SOUTH

A103 1/4" = 1'-0"

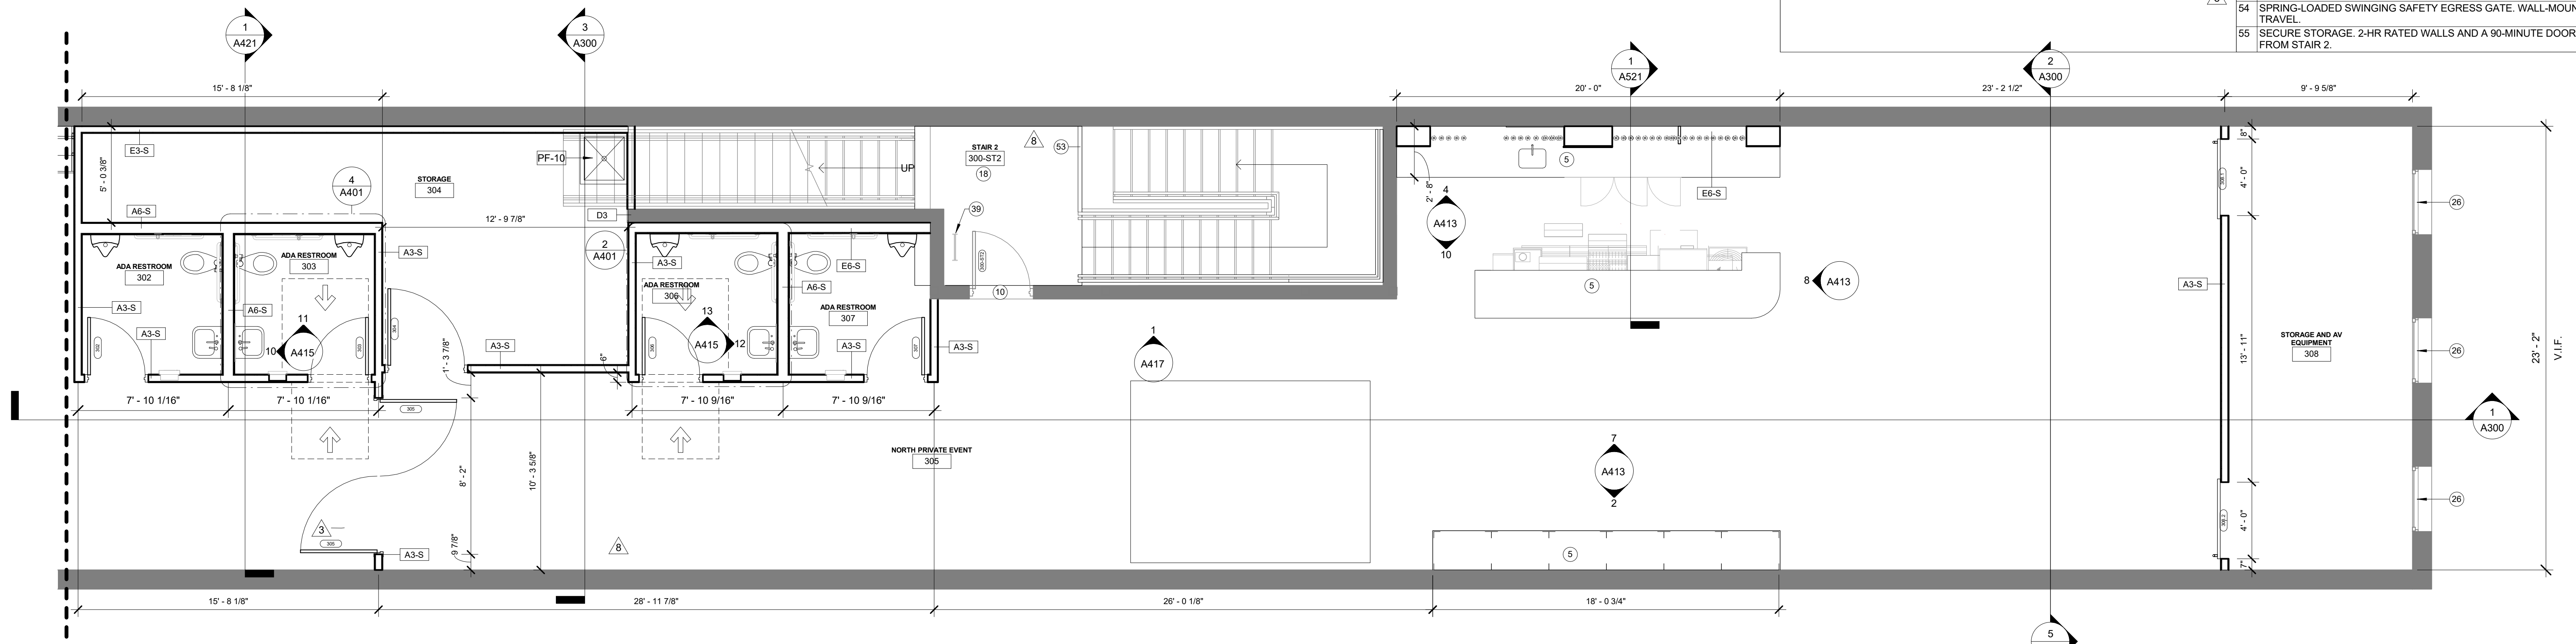

1 ARCHITECTURAL PLAN - LEVEL 03 - NORTH

A103 1/4" = 1'-0"



10 W MARKET ST
 SUITE 800
 INDIANAPOLIS, IN 46204
 P: 317.614.0055
 F: 317.632.5662
 DKGRR.COM

OWNER:
 THE NUMBERS HOLDING COMPANY

3560 CHESTNUT PLACE
 DENVER, CO 80202
 P: 303.453.0551
 www.numberstyrepage.com

STRUCTURAL ENGINEER
KPFF
 135 S. 6TH STREET
 SUITE 200
 LOUISVILLE, KY 40202
 P: 502.325.0100
 www.kpff.com

MEP ENGINEER
CIRCLE DESIGN GROUP
 825 DELEGATES ROW
 SUITE 100
 INDIANAPOLIS, IN 46240
 LOUISVILLE, KY 40202
 P: 502.438.8174
 www.irc-inc.com

SHEET REVISIONS

#	DESCRIPTION	DATE
1	Issued for #3	01.19.2022
2	AS1 #10	05.13.2022
3	AS1 #10	05.22.2022

NUMBER 15 ENTERTAINMENT VENUE
 121 West Main St
 Louisville, KY 40202

DATE: 04.19.2022
 PROJECT #: 2021-016



FLOOR PLAN - LEVEL 03



SHEET NO **A103**

PLAN KEY

BUILDING KEY

GENERAL PLAN NOTES

GENERAL FINISH NOTES

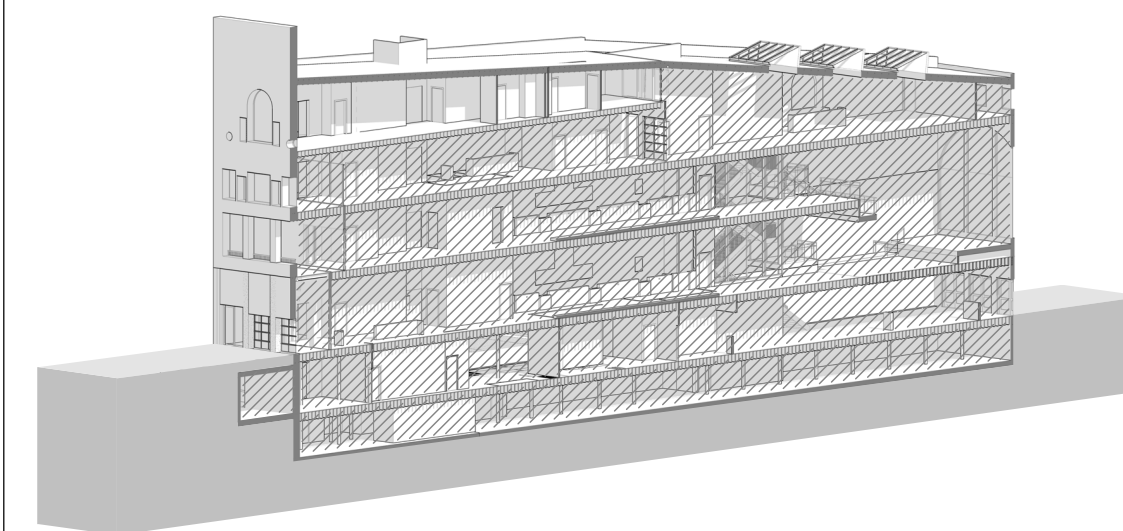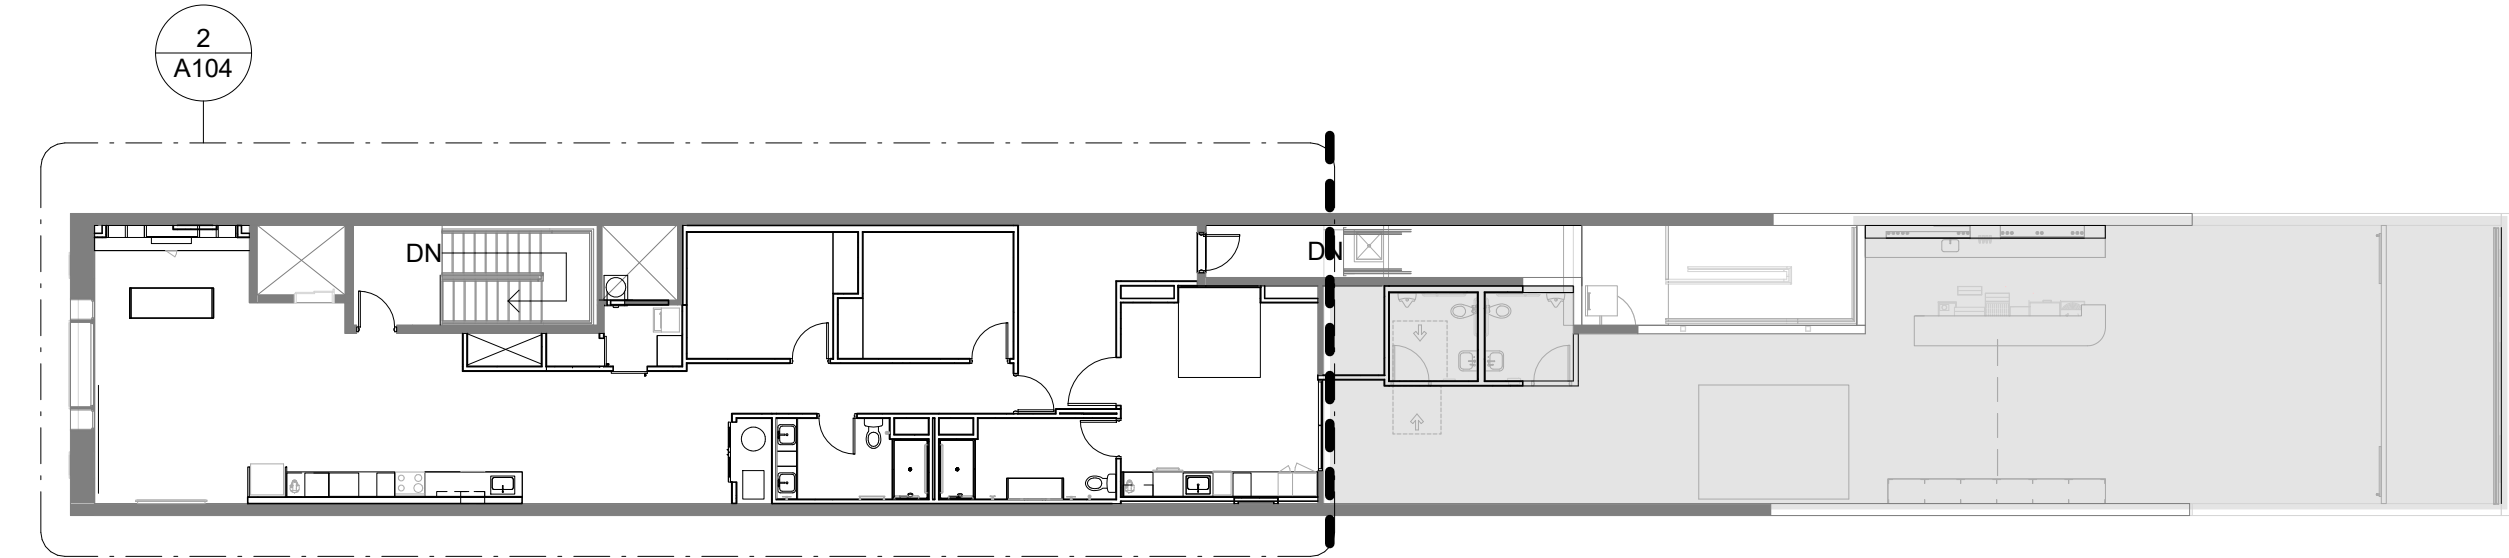

- A. [Symbol] EXISTING WALL(S) TO REMAIN
 - B. [Symbol] NEW WALL WHERE INDICATED
 - C. ALL NEW WALLS TO BE TYPE A3-S UNLESS NOTED OTHERWISE
- WOOD FLOORING FINISH UNLESS NOTED OTHERWISE. ASSUME \$13/SF MATERIAL ALLOWANCE.
- PERIMETER WALLS SCOPE:
- EXISTING BRICK TO BE CLEANED AND TUCK POINTED WHERE NECESSARY.
- FINISHED WITH CLEAR MATTE SEALER.
- EXISTING CONCRETE TO BE CLEANED AND PAINTED

- A. ALL WALLS ARE PAINT, U.N.O.
- B. LEVEL & FINISH OF GYP. BD. WALLS AND SOFFITS TO BE LEVEL 4 FINISH, U.N.O.
- C. ALL GYP. BOARD CEILINGS TO BE PAINTED, U.N.O.
- D. CARPET SEAMS TO BE LOCATED AT CENTERLINE OF DOOR IN CLOSED POSITION.
- E. ALIGN FLOORING TRANSITIONS WITH FINISH BASE EXCEPT AT DOORS, U.N.O.
- F. ALL TRANSITION/REDUCER STRIPS AND OTHER THRESHOLDS TO BE LOCATED AT CENTERLINE OF DOOR WHEN IN CLOSED POSITION
- G. ALL REQUIRED FLOORING PREPARATIONS SHALL BE BY FLOORING CONTRACTOR.
- H. PAINT ALL HOLLOW METAL DOOR FRAMES P3, U.N.O.
- I. SEAL AROUND ALL DOOR FRAMES AND CASEWORK WITH COLOR TO MATCH WALL.
- J. ALL PLASTIC LAMINATE ON VERTICAL SURFACES TO RUN VERTICALLY.
- K. PAINT WALLS: EGG-SHELL
PAINT CEILINGS: FLAT
PAINT DOOR FRAMES/TRIM: SATIN
- L. ALL FINISH MATERIAL SAMPLES AND PRODUCT DATA ARE TO BE SUBMITTED TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.


PLUMBING FIXTURE SCHEDULE

MARK	MANUFACTURER	MODEL	DESCRIPTION
PF-08	DAYTON OR EQ.	KRAUS	HAND SINK - COUNTER MOUNTED SINGLE BOWL STAINLESS SINK, 20" X 18", KRAUS BOLDEN PULL OUT FAUCET + SOAP DISPENSER
PF-09	ELKAY	LBWDC00BK C	60"X20" LV PRO COMMERCIAL BUILT-IN WATER DISPENSER - REMOTE FILTER COMPARTMENT
PF-10	EAGLE GROUP OR EQ.	F2820-12, 321561, 312686, 312686, 503099 OR 503098	MOP SINK: BOWL, 4-POLE MOP HOLDER, HOSE & BRACKET, SERVICE FAUCET, AND RIGHT/REAR OR LEFT/REAR 16" SPLASH KIT
PF-11	HOSE BIB		HOSE BIB, MOUNT 12" FROM FFE.


*REFER TO A401 & A415 FOR RESTROOM FIXTURE SCHEDULE

PLAN NOTES

- 1 GC TO VERIFY STRUCTURAL JOIST LOCATIONS BELOW AND RELOCATE TOILETS AS NECESSARY TO AVOID PLUMBING CONFLICTS. TOILETS TO BE CENTERED BETWEEN TOILET PARTITION WALLS. REFER TO FINISH PLANS FOR FLOOR AND WALL TREATMENT. GENERAL MOUNTING HEIGHTS CAN BE FOUND ON 5302
- 2 COOLER/FREEZER UNIT BY FSE VENDOR (OWNER CONTRACT). UNIT SIZE APPROX. BY PLANS. UNIT HEIGHT APPROX. 8' TALL
- 3 APPROX. 8' TALL COOLER/FREEZER/KEG ROOM. UNIT BY FSE VENDOR (OWNER CONTRACT)
- 4 TV BY OWNER. MOUNT AT 60" AFF ON CENTER U.N.O. PROVIDE MOUNTING BRACKET. COORDINATE TV AND BRACKET SIZING WITH OWNER
- 5 FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS
- 6 NEW PARTITION WALL TO REPLACE DEMOLISHED. ALIGN TO PREVIOUS LOCATION
- 7 ALL TRASH/RECYCLE SERVICE AND STORAGE EQUIPMENT TO BE PROVIDED BY OWNER. ALL WALL COVERING TO BE WATER-RESISTANT. INSTALL FLOOR DRAIN AND SLOPE ALL FLOORING TO DRAIN. REFER TO PLUMBING FOR DRAIN SIZE AND LOCATION. REFER TO FINISH PLANS FOR FURTHER INFORMATION
- 8 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION
- 9 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION
- 10 HOLLOW METAL DOOR INSTALLED IN EXISTING HOLLOW METAL FRAME. GC TO NOTIFY ARCHITECT IF FRAMES DO NOT MEET FIRE RATING REQUIREMENTS
- 11 4' X 8' DOUBLE-ACTING KITCHEN DOOR. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION
- 12 NEW EXTERIOR ALUMINUM STOREFRONT ENTRY SYSTEM. MULLION GRID TO REPLICATE HISTORIC STOREFRONT SYSTEM. REFER TO STOREFRONT AND DOOR SCHEDULES FOR FURTHER INFORMATION
- 13 24" DIAMETER TRASH CHUTE WITH DRAIN AND HOSEBIB AT GROUND LEVEL. TRASH CHUTE IN 2-HR RATED ENCLOSURE. PROVIDE 90 MIN. RATED CHUTE-TYPE FIRE DOOR AT FLOORS 03-04 (BASIS OF DESIGN: CHUTE INTERNATIONAL) CHUTE DOOR TO MEET UL CERTIFICATION NO. CSPR121688. TRASH CUTIE SANITIZER LOCATED ON LEVEL 04. REFER TO PLUMBING AND SPECIFICATIONS FOR FURTHER INFORMATION
- 14 6' X 10' EXTERIOR ALUMINUM GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION
- 15 RESTORE EXISTING COLUMN. LIGHTLY SAND AREAS OF WOOD AND REFINISH WITH STAIN. REFER TO FINISH PLANS FOR FURTHER INFORMATION
- 16 EXISTING ELEVATOR TO REMAIN. MAINTENANCE AS NECESSARY TO RESUME SERVICE. ALL NEW CAB FINISHES - SNABAC MODERN 1 STYLE. REPLACE EXISTING LAMINATE WITH P8 (SNABAC STANDARD FINISH). NEW WDI FLOORING. PATCH AND REPAIR EXISTING CEILING AS NECESSARY. REPAINT ELEVATOR DOORS AND TRIM - PAINT COLOR SPEC AT EACH LEVEL TO BE DISCUSSED ON SITE
- 17 EXISTING FREIGHT HOISTWAY TO BE UTILIZED FOR VERTICAL INFRASTRUCTURE RUNS. REFER TO MEP DRAWINGS FOR LOCATIONS AND SIZES
- 18 EXISTING WALL-MOUNTED HANDRAILS TO BE REPLACED WITH NEW CODE COMPLIANT PIPE HANDRAILS (SIMILAR TO EXISTING). INTERIOR STAIR MOUNTED HANDRAILS TO REMAIN. ALL STEEL STRINGERS, HANDRAILS, RISERS AND OTHER EXPOSED ELEMENTS TO BE FIELD PAINTED P9. AREAS OF EXPOSED BRICK OR CMU TO BE FURRED OUT AND DRYWALLED. REFER TO FINISH SCHEDULE FOR FURTHER INFORMATION
- 19 NEW INTERIOR ALUMINUM CURTAIN WALL SYSTEM IN LOCATIONS INDICATED. MODIFY SPRINKLER SYSTEM TO CREATE "SPRINKLER CURTAIN" AT THESE LOCATIONS TO MAINTAIN RATED ENCLOSURE (TYCO MODEL). REFER TO PLUMBING FOR FURTHER INFORMATION
- 20 REFER TO FINISH PLANS FOR FURTHER INFORMATION
- 21 FURR OUT WALL. HOLD STUDS 6" FROM EXISTING FACE TO ALLOW CHASE FOR BEER LINES AND VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION. FSE BY OWNER. REFER TO MEP SCOPE FOR HOOK-UP LOCATIONS. SEE ELEVATIONS FOR CASEWORK SIZES AND LOCATIONS
- 22 JANITOR CLOSET W/ MOP SINK
- 23 FOLDING SECURITY GATE TO BE CLOSED DURING NON-OPERATIONAL HOURS OF ASSEMBLY SPACE TO CREATE REASONABLE SEPARATION FROM RESIDENTIAL USER EGRESS FROM STAIR 1. BY ULINE OR EQUAL
- 24 NEW FLOOR FRAMING IN THIS AREA. FFE TO BE FLUSH WITH THE EXISTING FLOOR. SEE FINISH PLANS FOR FLOOR TREATMENT SCOPE. REFER TO STRUCTURAL FOR FURTHER INFORMATION
- 25 PLATFORM SEATING OVERBUILD IN AREA INDICATED. SEE SECTIONS. REFER TO STRUCTURAL FOR FURTHER INFORMATION
- 26 ALL EXISTING HISTORIC WINDOWS TO BE REPAIRED AND RESTORED IN PLACE. ALL FORMER REPLACEMENT WINDOWS TO BE REMOVED AND REPLACED WITH HISTORIC REPLICA WINDOWS OF SIMILAR ERA AND STYLE TO ORIGINAL WINDOWS. REFER TO A604 FOR APPROXIMATE MEASUREMENTS. GC TO VERIFY IN FIELD
- 27 3'-0" X 3'-0" DOUBLE-ACTING SWING DOORS. BASIS OF DESIGN: RUSTICA OR APPROVED EQUAL
- 28 STOREFRONT WALL W/ INTERM MANDOCOR
- 29 INTERIOR ALUMINUM STOREFRONT SYSTEM. REFER TO STOREFRONT ELEVATIONS FOR FURTHER INFORMATION
- 30 MOSAIC TILE FLOORING IN SHOWER. PROVIDE ADEQUATE WATERPROOFING AND SLOPING CONDITIONS
- 31 6' X 10' INTERIOR ALUMINUM GLASS OVERHEAD DOOR TO BE MOTORIZED. SEE ELECTRIC. REFER TO DOOR SCHEDULE FOR FURTHER INFORMATION
- 32 TIERED FLOOR EXTENSION LOWERED 42" FROM FFE. MUSIC VIEWING TERRACE GUARDRAIL TO BE PROVIDED BY SIPHON ASSOCIATES. RAILING TO BE BLACK WITH METAL DRINK TOPPER. BASIS OF DESIGN: HOLLAENDER - QUAD AL METAL PANEL INFILL TO BE CHOSEN FROM GKD METAL FABRICS FULL SELECTION OF PATTERNS. FINISHED FACE OF DRINK PLATFORM TO REACH 3'-0" MIN. TERRACE FRAMING TIED TO EXISTING PERIMETER WALLS TO AVOID COLUMNS BELOW. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION
- 33 RESTORE EXISTING CEILING AND WALL CONDITIONS AS INDICATED ON A210. INSTALL NEW PORCELAIN TILE FLOORING OVER WEATHERPROOF MEMBRANE. FLOOR PREP TO PROVIDE MINIMAL SLOPE TO DRAIN AS POSSIBLE. REFER TO PLUMBING DRAWINGS FOR DRAIN LOCATION AND SIZE
- 34 EXISTING BRICK FIREPLACE TO REMAIN AND BE RESTORED. AREAS OF BRICK TO BE TUCKPOINTED. PAINTED MASONRY BLOCK TO BE TUCKPOINTED AND REPAINTED. WOOD MANTEL TO BE SANDED AND RESEALED. PAINT P11. VENTLESS GAS FIREPLACE TO BE INSTALLED. BASIS OF DESIGN MOTIGO H38V0. SINGLE SIDED VENTLESS FIREPLACE INSERT. REFER TO MEP FOR GAS AND ELECTRICAL REQUIREMENTS
- 35 RAISED PLATFORM SEATING OVERBUILD. 6" FROM EXISTING FFE
- 36 AREA RESERVED FOR DJ MIXING BOOTH. REFER TO ELEC FOR SCOPE. FINISHES TO MATCH SURROUNDING. AREA SEPARATED BY 3'-0" SWING GATE
- 37 INFILL EXISTING WAINSCOTING AS INDICATED ON ELEVATIONS. REFER TO FINISH PLANS FOR MORE INFORMATION
- 38 LINE OF SAWTOOTH SKYLIGHT ABOVE. 8'-0" X 12'-0. REFER TO A105 FOR FURTHER INFORMATION
- 39 NEW ROOF ACCESS LADDER
- 40 RAISED FLOOR PLATFORM 2'-0" FROM EXISTING FFE. RAILING TO BE METAL. SCREEN FILL WITH DRINK RAIL PLATFORM ON TOP. FINISHED FACE OF DRINK PLATFORM TO REACH 3'6" MIN
- 41 STACKED WASHER/DRYER UNIT BY OWNER. REFER TO MEP FOR HOOK-UP LOCATIONS
- 42 KITCHENETTE APPLIANCES IN GENERAL CONTRACTORS PACKAGE. REFER TO MEP FOR HOOK-UP LOCATIONS
- 43 LINE OF NEW ROOF ACCESS HATCH ABOVE
- 44 MAINTENANCE PLATFORM. SERVICE-GRADE STEEL FLOOR TO BE INSTALLED FLUSH WITH FFE
- 45 EXISTING BUILDING CONDITIONS TO BE CLEANED, REPAIRED OR PATCHED IN PREPARATION FOR NEW FINISHES. REMOVE ALL DEBRIS AND DECOMMISSIONED EQUIPMENT. WOODEN SHELVING TO BE REMOVED THROUGHOUT
- 46 FURR OUT WALL. HOLD STUDS 4" FROM EXISTING FACE BEHIND RESTROOMS TO ALLOW CHASE FOR VARIOUS PLUMBING. REFER TO PLUMBING FOR FURTHER INFORMATION
- 47 FURR OUT EXISTING WALL AS NEEDED. FINISH FACE TO BE FLUSH WITH ADJACENT SPRINKLED CURTAIN WALL MULLION AND NEW KNEE WALL
- 48 EXISTING HISTORIC MOSAIC TILE AND CONCRETE SURROUND. REPAIR AND RESTORE IN PLACE
- 49 EXISTING GUARDRAIL TO BE MODIFIED TO MEET 42" AFF. CODE COMPLIANT HEIGHT
- 50 SPRING-LOADED SWINGING SAFETY EGRESS GATE. WALL-MOUNTED, SWINGING IN PATH OF EGRESS TRAVEL
- 51 SECURE STORAGE. 2-HR RATED WALLS AND A 90-MINUTE DOOR AND FRAME TO SEPARATE CLOSET FROM STAIR 2.

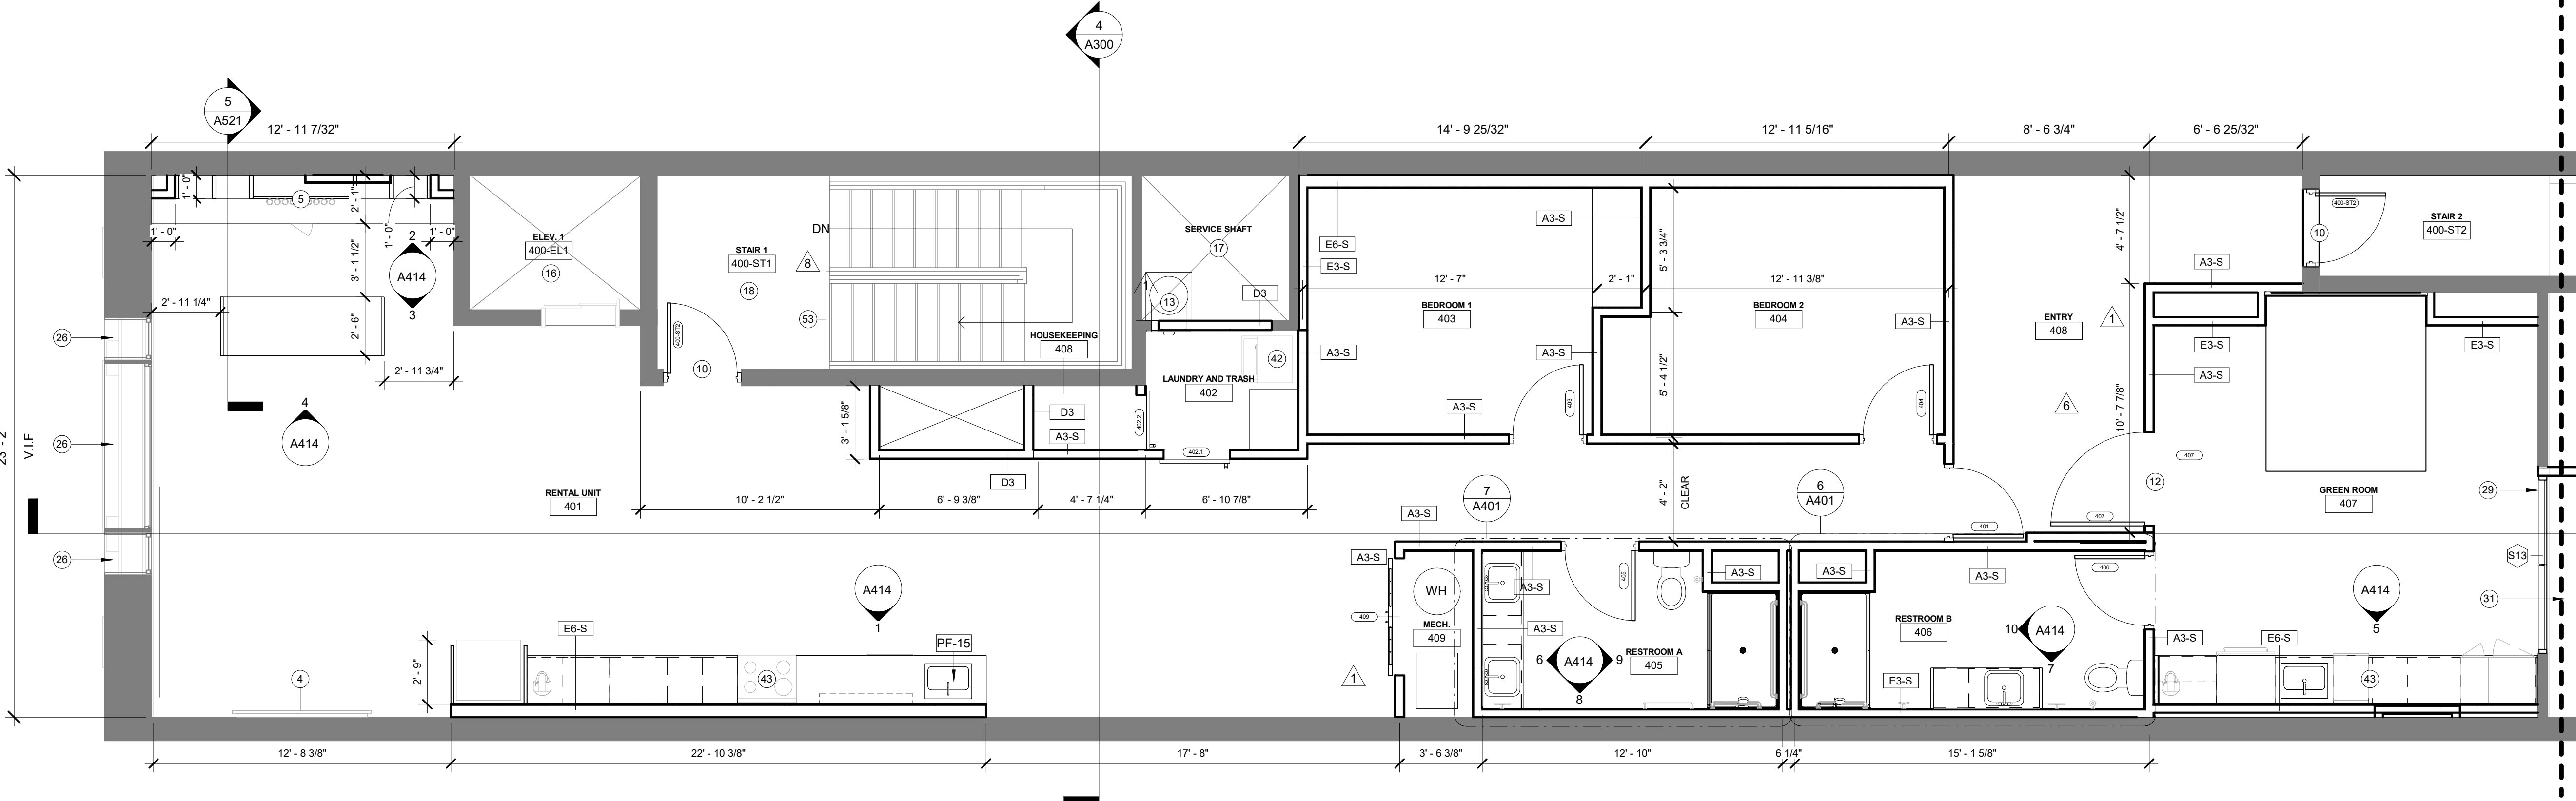

2 ARCHITECTURAL PLAN - LEVEL 04 - SOUTH
A104 1/4" = 1'-0"

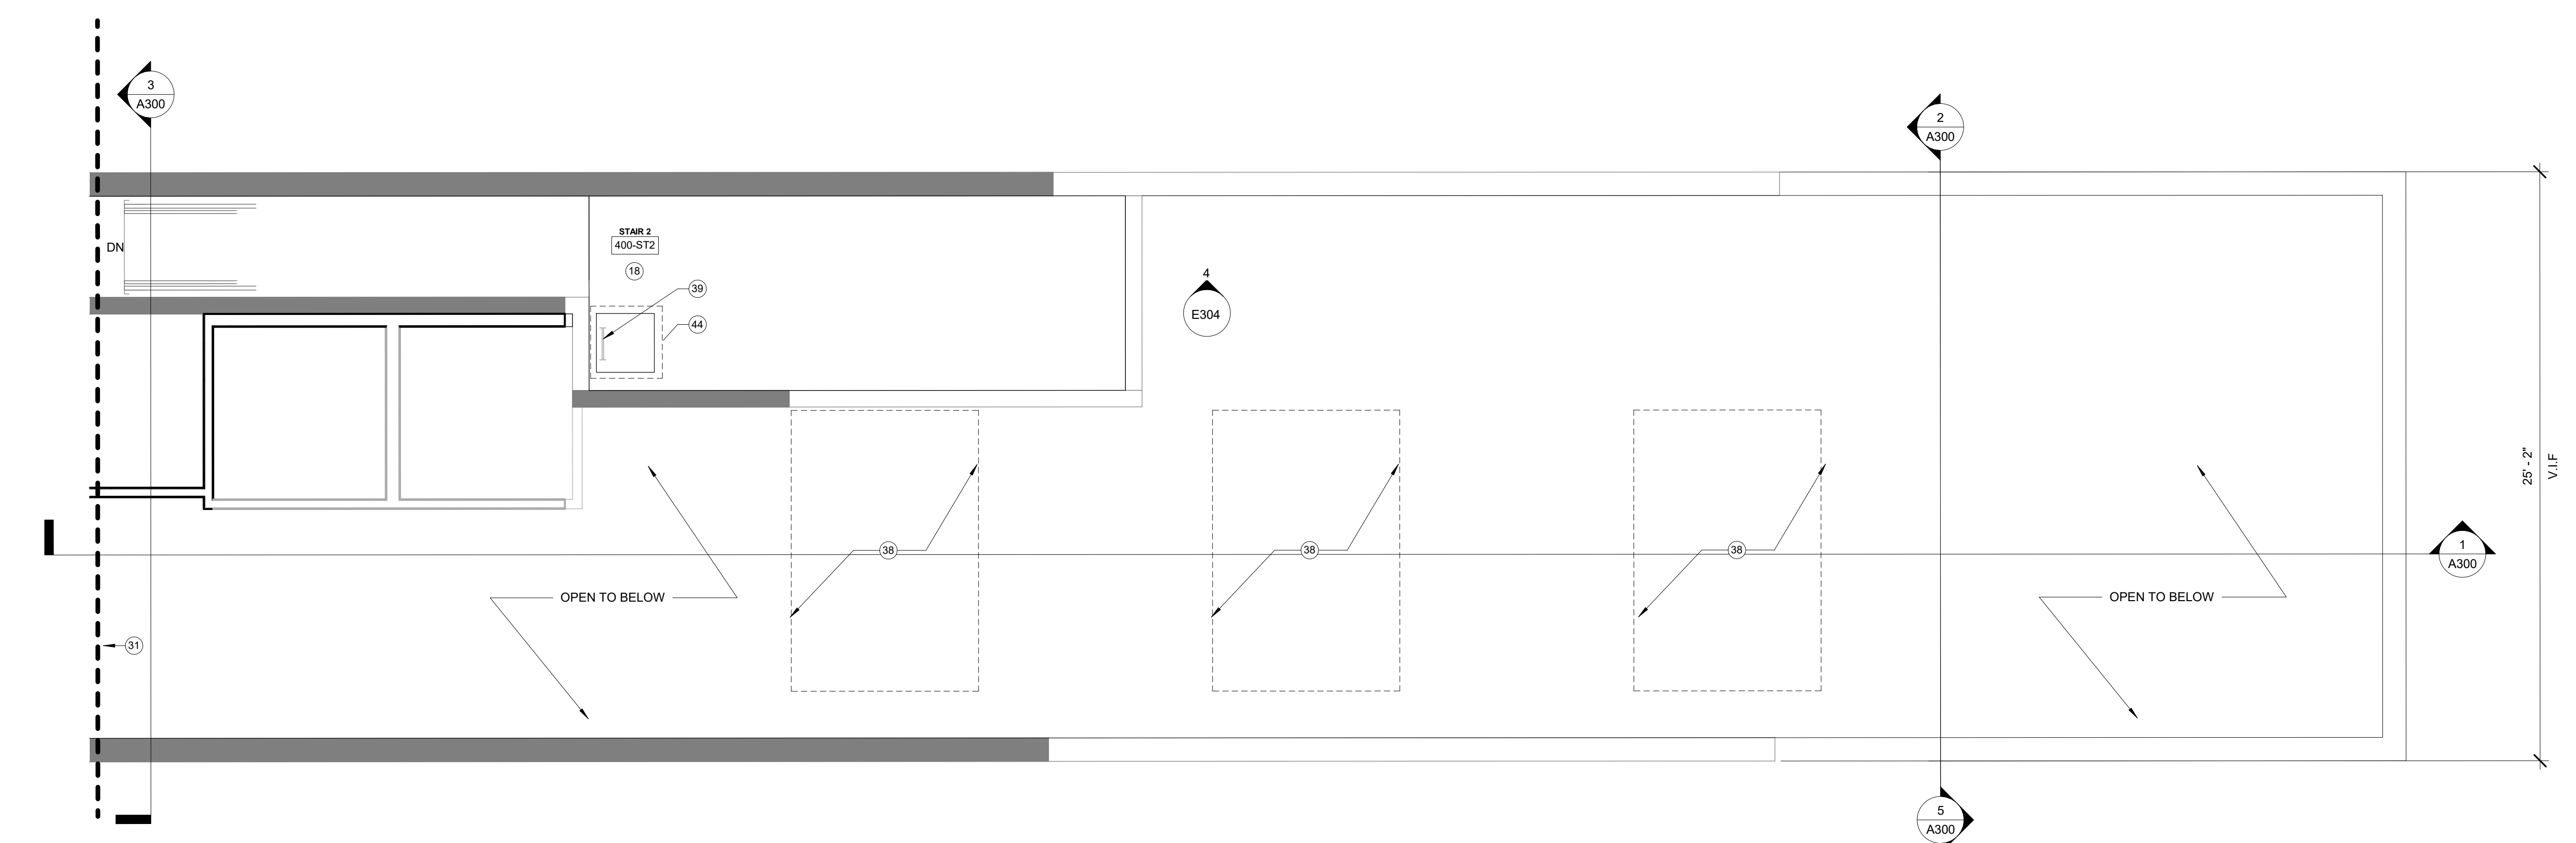

1 ARCHITECTURAL PLAN - LEVEL 04 - NORTH
A104 1/4" = 1'-0"

DKGR

10 W MARKET ST
SUITE 800
INDIANAPOLIS, IN 46204
P: 317.614.0055
F: 317.632.5662
DKGR.AR.COM

OWNER:
THE NUMBERS HOLDING COMPANY

3560 CHESTNUT PLACE
DENVER, CO, GRADO 80216
P: 303.493.0551
www.numbersyrtye.com

STRUCTURAL ENGINEER
KPFF
135 S 4TH STREET
SUITE 100
LOUISVILLE, KY 40202
P: 502.325.0100
www.kpff.com

MEP ENGINEER
CIRCLE DESIGN GROUP
8225 DELEGATES ROW
SUITE 100
INDIANAPOLIS, IN 46240
P: 317.632.5662
www.circledesigngroup.com


CIVIL ENGINEER
LAND DESIGN & DEVELOPMENT
503 WASHBURN AVENUE
SUITE 100
LOUISVILLE, KY 40202
P: 502.408.8724
www.lsd-inc.com

SHEET REVISIONS

#	DESCRIPTION	DATE
1	Issued for #3	11.19.2021
2	A31 #102	08.29.2022
3	A31 #101	01.23.2022

NUMBER 15 ENTERTAINMENT VENUE
121 West Main St
Louisville, KY 40202

DATE: 04.19.2022
PROJECT #: 2021-016

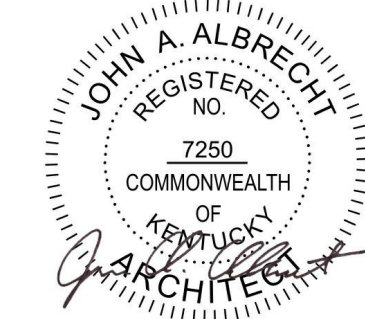

FLOOR PLAN - LEVEL 04

SHEET NO **A104**