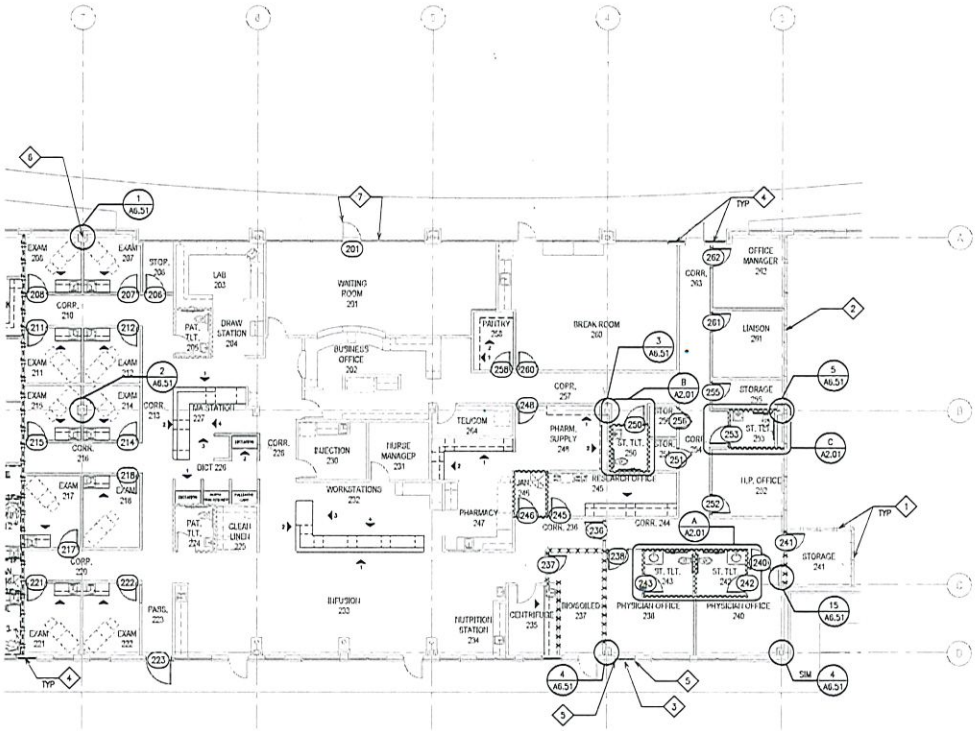

NOTES:

1. EXISTING WALLS TO BE UPGRADED TO ONE WALL TENANT SEPARATION WALLS.
2. EXISTING ONE RATED TENANT SEPARATION WALLS TO BE MAINTAINED. REPAIR AS REQUIRED PER NEW WORK TO MAINTAIN ONE HOUR RATING.
3. NEW BRICK VENEER EXTERIOR WALL TO ALIGN WITH EXISTING AND MATCH EXISTING IN RATING, MATERIAL, COLOR, FINISH AND TEXTURE. INSIDE FINISH TO BE 5/8" TYPE "X" GYP. BD. (EXTENT OF RUN: FLOOR TO FLOOR) ON NEW MTL. STUDS INSPECT EXISTING BATT. INSULATION. ENSURE CAVITY WALL IS FULL & INSULATION IS STILL INSTALLED TIGHT WITHOUT SAGGING PRIOR TO CLOSING WALL. REPLENISH INSULATION AS REQUIRED. UTILIZE CONTROL JOINTS WITH BACKER ROD AND SEALANT COMPATIBLE WITH NEW AND EXISTING BRICK VENEER SYSTEM AT EACH END OF NEW WALL CONSTRUCTION TO EXISTING WALL CONSTRUCTION. NEW BRICK VENEER WALL TO MATCH EXISTING IN COLOR, TEXTURE, FINISH AND PATTERNS.
4. INSTALL BLINDS IN CLOSED POSITION AND ENCLOSE ALL WINDOWS WITH 5/8" TYPE "X" GYP. BD. ON METAL STUDS.
5. CONTROL JOINTS (CJ) ARE TO BE USED AT ALL EXTERIOR WALLS WHERE NEW CONSTRUCTION AND OLD CONSTRUCTION MEET. SEE DETAIL 11 ON A6.51.
6. WRAP ALL COLUMNS TIGHT USING 5/8" TYPE "X" GYP. BD. ON MTL. STUDS, TYPICAL.
7. ADD PUSH BUTTON TO OPERATE DOOR 201. SEE DOOR SCHEDULE A7.01 FOR HARDWARE SET AND ELECTRICAL FOR POWER.

GENERAL NOTES:

A. CONFIRM EXISTING DOOR AND WINDOWS ARE IN GOOD WORKING ORDER. REPAIR AS REQUIRED TO GOOD WORKING ORDER AND REPAINT INSIDE AND OUTSIDE AS REQUIRED PER NEW WORK/ FINISH.

B. TV MOUNT. PER TV MANUFACTURE AND COORDINATE TYPE AND STYLE PRIOR TO INSTALLATION. SEE DETAIL 7/ A6.51.

C. ALL WALLS IN ROOMS 242, 243, 250, 253 WALLS TO ROOF DECK WITH SOUND BATT INSULATION IN THE WALL TO DECK.

D. ALL OTHER NON RATED WALLS TO GO 6" ABOVE CEILING AND SOUND BATT INSULATION IN THE WALLS AND OVER THE TOP OF THE STUD WALL AND LAYING ON TOP OF THE CEILING TILE FOR SOUND ABSORPTION.

EQUIPMENT LEGEND

- OWNER FURNISHED / CONTRACTOR INSTALLED
- CONTRACTOR FURNISHED / INSTALLED

WALL LEGEND

GYP. BD.	WALL CONSTRUCTION TYP.
	EXISTING PARTITION
	UNRATED PARTITION TO ABOVE CLG.
	UNRATED PARTITION TO DECK
-X-X-X	SMOKE PARTITION
—1F—	1 HOUR FIRE BARRIER

NOTE: 1. FOR SOUND WALLS SEE DIMENSIONED PLAN.
2. ALL WALL TYPES MAY NOT BE USED.

NOTED FLOOR PLAN

0 2 4 8 16

TENNESSEE ONCOLOGY

LEBANON, TENNESSEE

DAVIS STOKES COLLABORATIVE P.C.
DSC ARCHITECTS
7201 CROSSROADS BLVD
BRENTWOOD, TN 37027
TEL (615) 790-0100
MAIL dsc@dsc-arch.com
WEB www.dsc-arch.com

REVISIONS

NO	DATE	DESCRIPTION

NOTED FLOOR PLAN

A1.51

ISSUE DATE 12.01.20
DRAWN BY