

FLOOR PLAN NOTES
 Items not in contract noted N.I.C.
 Differences &/or conflicts between contract drawing & specification & shop drawings, shall be called to the Builders attention.
 If differences &/or conflicts are not noted to Builder prior to contract, Builder shall determine governing condition & sub-contractor shall perform work at no additional cost.
 Provide blocking in walls for wall hung cabinetry, benches, coat racks, plumbing fixtures, etc.
 Toilet rooms and darkroom walls shall receive full height ceramic tile wall finish.

Walls where indicated shall receive lead protection weighing approx. 4 P.S.F. to a height of 7'-0". A radiation physicist should verify the protection required for the specific equipment and room layout.

Field applied vinyl, Class A, mildew resistant. Vic-tex, Genon or approved equal. Strippable paste by Vertex F146W or Genon GT-400. Wall coverings installed & cleaned per manufacturers recommendations & according to usual accepted standards of the trade.

| Symbol | Description |
|--------|-------------|
| FAV #1 | |
| FAV #2 | |
| FAV #3 | |
| FAV #4 | |
| FAV #5 | |

See this symbol on plan number from chart above

Dropped headers at reception and nurses' station to be taped and sanded to receive paint.

| Symbol | Description |
|--------|-------------|
| T & P | |

All other walls shall receive harvest colored, vinyl covered gypsum board.

Floors shall be carpeted with Lees "Faculty" carpet. Color: 4109-283 Cream unless indicated as ceramic or vinyl asbestos tile.

All carpet is to be field installed.

Vinyl base shall be Mercer #206 Sand.

All countertops shall be sand plastic laminate.

See Sheet E-1 for electrical information.

Indicates location of fire extinguisher cabinet. Extinguisher is N.I.C.

Aluminum Windows:
 Windows are WF44 and WF47.
 Operating & Fixed window frames & sash of extruded, prefinished, hardcoat aluminum by Wausau Metals Corp. or approved equal.
 Windows pre-glazed w/solar bronze insulating glass & all sash double weatherstripped.

Windows w/ horiz. aluminum blinds. Nanik or approved equal.

Exterior entries shall be steel door in steel frame unless indicated as aluminum entry. Color: Dark Bronze.

Exterior sidelights shall receive solar bronze glass.

Wood & Plastic Doors: (Supplied by Builder)
 Interior 1-3/4" solid core slab, wood Oak plastic doors.
 Light-proof doors w/ an automatic door bottom to prevent light infiltration in addition to the utilized weatherstripping.
 Lead lined doors w/ the equivalent of 4 pounds per square foot of sheet lead.

Abbreviations:

| | |
|----|---------------------|
| CO | Cased opening |
| LL | Lead lined |
| LP | Light proof |
| 20 | 20 min. smoke rated |
| 1H | 1 1/2 hour rated |

Door Hardware: (Supplied by Builder)
 Keyed locksets always free in direction of egress.
 Exterior doors w/ keyed lockset.
 Standard interior door w/ passage lockset. Toilet & dark rooms w/ privacy locksets.
 Interior keyed locksets as noted.


| Symbol | Description |
|----------|---------------------------------|
| (Symbol) | Door w/ closer |
| (Symbol) | Door w/ closer & hold open |
| (Symbol) | Door w/ keyed lockset |
| (Symbol) | Door w/ smoke release hold open |

Abbreviations:

| | |
|-------|-----------------------------------|
| (S) | Indicates location of state seal. |
| (D) | Indicates location of data plate. |
| (PFS) | Indicates location of PFS seal. |
| VBRI | View box rough-in |
| CT | Ceramic tile |
| VAT | Vinyl asbestos tile |
| MO | Masonry opening |
| RO | Rough opening |
| WH | Wall hydrant (by Builder) |
| P.T. | Indicates plaster trap. |

ALL DIMENSIONS ARE FROM EITHER STUD LINE OR CENTER LINE OF STUD.

ONE HOUR FIRE-WALL

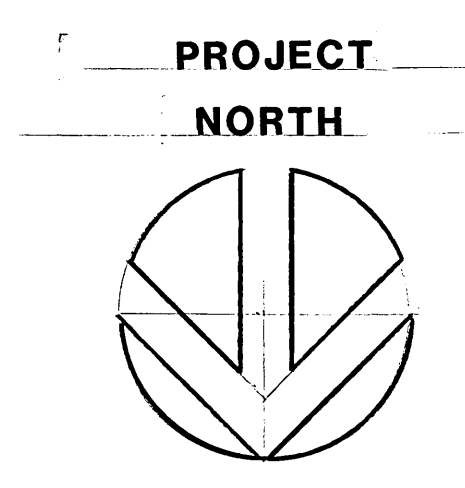

Theron W. Born Architect
 3097 Pres. Dr.
 Atlanta, Georgia 30340

MEDICAL OFFICE BUILDING MORROW, GEORGIA

Marshall Erdman & Associates, Inc.
 DESIGN / ENGINEERING / PREFABRICATION / CONSTRUCTION
 Madison, W. / Hartford, Conn. / Richmond, Va. / Atlanta, Ga. / Dallas, Tex.

FLOOR PLAN
 DATE: 11-22-88 SCALE: 1/8" = 1'-0"
 DRAWN BY: J.M. (J.M.)
 CHECKED BY: J.M. (J.M.)
 DESIGNED BY: J.M. (J.M.)
 PROJECT NO. 42788

PROJECT NORTH

JOB NUMBER A2788

SHEET NUMBER 4