


36" AISLE
44" AISLE

NOTE: ALL FIRE EXTINGUISHER LOCATIONS & QUANTITIES ARE SUBJECT TO FIRE MARSHAL'S FINAL DETERMINATION.
* FIRE EXTINGUISHERS SHALL BE WALL-MOUNTED SUCH THAT THE BOTTOM IS NO LESS THAN 4" ABOVE FIN. FLOOR & THE TOP IS NO MORE THAN 5'-0" ABOVE FINISH FLOOR. (SEE 2012 IFC SEC. 906)

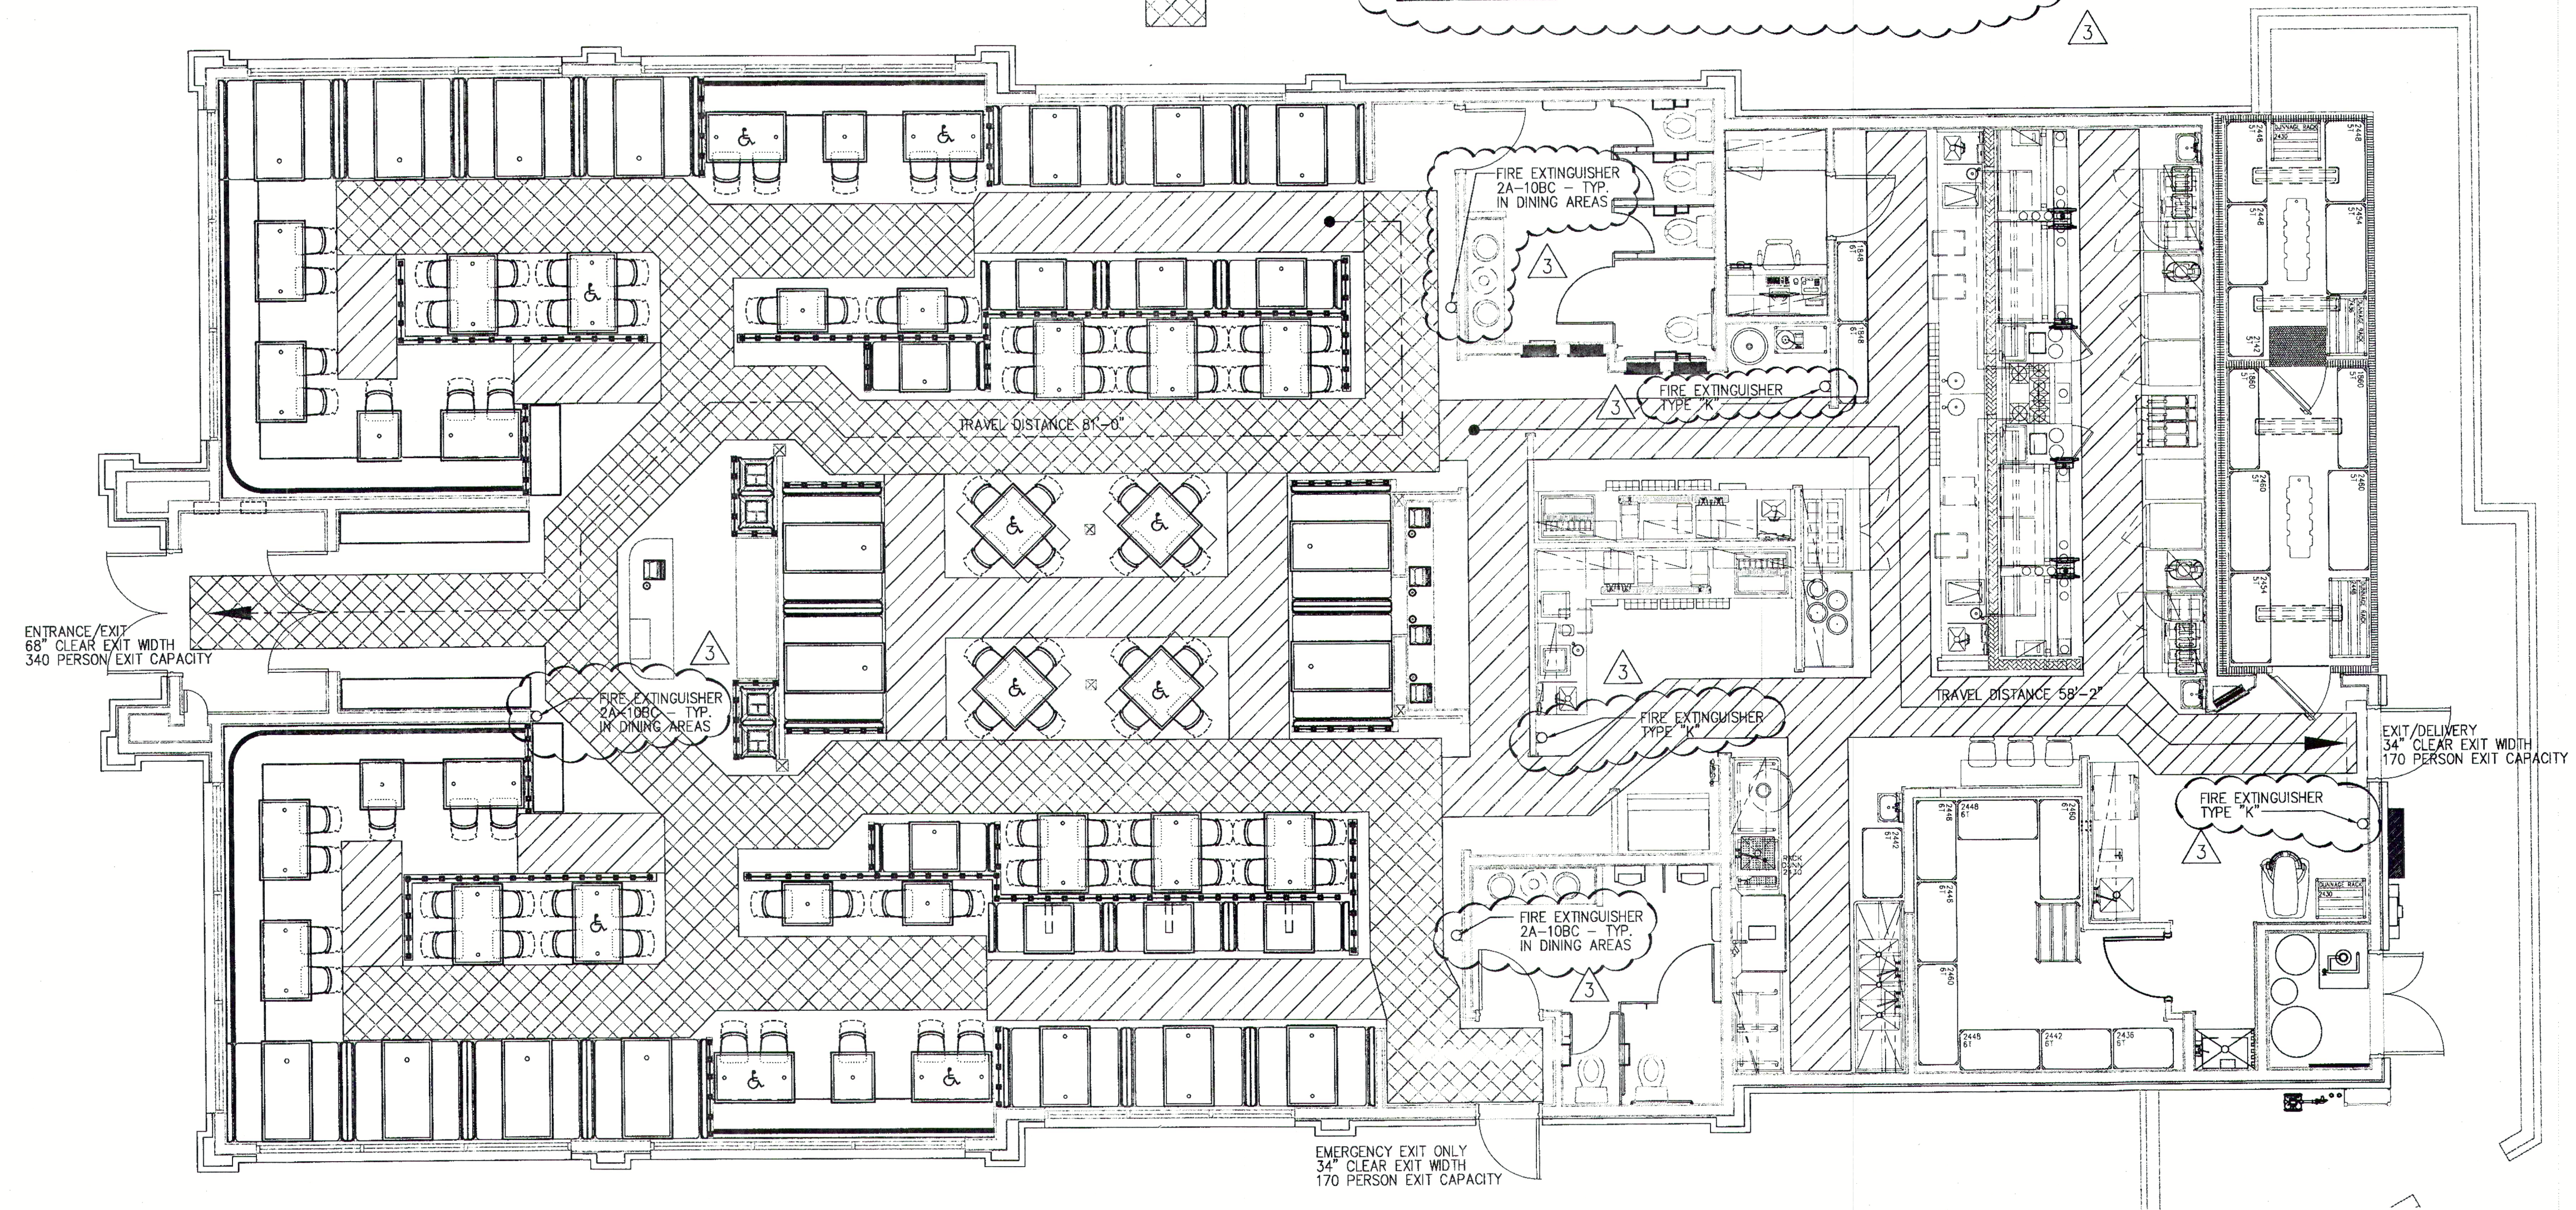

SEATING + LIFE SAFETY PLAN

SCALE: 3/16" = 1'-0"

DEFINITIONS	
EC	- ELECTRICAL CONTRACTOR
F	- FOOD SERVICE EQUIPMENT CONTRACTOR
G	- GENERAL CONTRACTOR
HVAC	- HVAC CONTRACTOR
I	- OWNER
M	- MILLWORK CONTRACTOR
PC	- PLUMBING CONTRACTOR

GENERAL NOTES	
1.	ALL UTILITY CONNECTIONS TO EQUIPMENT (REGARDLESS OF EQUIPMENT PROVIDER) SHALL BE MADE BY CONTRACTOR
2.	ALL FLEX UTILITY CONNECTORS BETWEEN EQUIPMENT AND ROUGH-IN POINTS (REGARDLESS OF EQUIPMENT PROVIDER) SHALL BE PROVIDED BY CONTRACTOR.
3.	SHALL PROVIDE DISCONNECTS FOR ALL DIRECT ELECTRICAL CONNECTIONS AS REQUIRED BY LOCAL CODES.

ITEM NOTES	
1.	E.C. TO PULL FEED LEADS FROM HEAT LAMPS THROUGH CONDUIT TO HEAT LAMP CONTROL PANEL. FOOD SERVICE EQUIPMENT SUPPLIER TO PROVIDE HEAT LAMP CONTROL SWITCHES PRE-MOUNTED ON A STAINLESS STEEL COVER PLATE.
2.	E.C. TO RUN ALL CONDUIT ON EXTERIOR OF BOX. E.C. TO INSTALL FSEC PROVIDED LIGHT FIXTURES AS SHOWN ON ELEC DWG. J-BOX w/20A 120V CKT TO SERVICE LIGHTS, HIGH TEMP ALARM, HEATED VENT, DOOR HEATER & E.C. PROVIDED VAPOR PROOF DOOR MOUNTED IN FREEZER BOX FOR HEAT TAPE POWER SOURCE.
3.	INDICATES HANDICAP ACCESSIBLE TABLE/SEATING 5% OF 188 = 9.4 10 HANDICAP ACCESSIBLE SPACES PROVIDED ALL ACCESSIBLE SEATING AREA TABLES CONSTRUCTED w/ONE SECTION OF THE TABLE TOP HAVING A MAX. OF 28" LENGTH OUT OF 60" w/ 5% OF THE SEATING FOR EACH AREA. TABLE TOPS NOT TO EXCEED 34" A.F.F. PROVIDE 1 HDOP SPACE IN PATIO

SEATING SCHEDULE - STANDARD		
TABLE TYPE	PARTIES	SEATS
2-TOPS	8	16
2-TOP BOOTH	8	16
4-TOPS	26	104
4-TOP BOOTH	6	24
6-TOP BOOTH	10	60
TOTAL	58	220

220x.05 = 11 (11 H/C SEATS PROVIDED)

- GENERAL NOTES: SEE FS SHEETS & PME SHEETS FOR ROUGH-IN INFORMATION
- FIXTURE & EQUIPMENT CONTRACTOR (F.E.C.) PLANS ARE PROVIDED FOR THE SOLE PURPOSE OF INDICATING OUTLET LOCATIONS & EQUIPMENT REQUIREMENTS, and DO NOT RELIEVE THE GENERAL CONTRACTOR, SUBCONTRACTOR, PLUMBERS, ELECTRICIANS OR ANY APPLICABLE CODES.
 - IT SHALL BE THE RESPONSIBILITY OF THE OWNER AND/OR GENERAL CONTRACTOR TO INSURE THAT THE F.E.C. RECEIVES COPIES OF ALL ADDENDUMS AND CHANGES TO BUILDING PLANS WHICH ARE MADE PRIOR TO AND DURING CONSTRUCTION.
 - GENERAL CONTRACTOR TO PROVIDE NECESSARY CORE DRILLING, SLEEVES AND CONDUITS FOR REFRIGERATION, BEVERAGE AND SODA GAS LINES. CONDUITS SHALL BE ROUND NON-METALLIC AND DIAMETER AS SHOWN ON THESE PLANS. MINIMUM RADIUS 2'-0" AND NO FACTORY "L'S" PERMITTED.
 - GENERAL CONTRACTOR SHALL PROVIDE PROPER BACKING FOR ALL WALL AND/OR CEILING HUNG EQUIPMENT, SHELVING, ETC. AS INDICATED ON THESE PLANS. ALL CANTILEVER BRACKETS FOR TABLES AND STOOL SEATS OR OTHER EQUIPMENT TO BE PROVIDED BY THE F.E.C. BUT INSTALLED BY GENERAL CONTRACTOR IN ACCORDANCE WITH SPECIFICATIONS AND DIMENSIONS PROVIDED BY F.E.C. THE GENERAL CONTRACTOR TO PROVIDE PROPER BACKING SUPPORT FOR BRACKETS.
 - GENERAL CONTRACTOR & F.E.C. SHALL BE RESPONSIBLE FOR ALL GENERAL CLEAN-UP AND DISPOSAL OF ALL TRASH, CARTONS, CRATES, DEBRIS, ETC. AFTER FINAL INSTALLATION OF ALL FIXTURES.
 - PLUMBING AND/OR ELECTRICAL CONNECTIONS OF EQUIPMENT AND FIXTURES INDICATED ON THESE PLANS ARE NOT PART OF THE F.E.C. CONTRACTOR AND SHALL BE COMPLETED BY THE GENERAL CONTRACTOR AND/OR HIS SUBCONTRACTORS.
 - GENERAL CONTRACTOR TO CUT OR PROVIDE HOLES THROUGH CEILING, ROOFS AND WALLS FOR DUCTS, ETC., IN ACCORDANCE w/DUCT SIZES SPECIFIED BY THESE DRAWINGS. GENERAL CONTRACTOR ALSO TO PROVIDE ALL DUCT FIRE SEPARATION ENCLOSURES, WRAPPINGS, ETC., AS MAY BE REQUIRED BY LOCAL AND FIRE CODES.
 - INSTALLATION OF WALLS OR FLOORS FOR LOW TEMPERATURE FREEZER WALK-IN BOXES SHALL BE PERFORMED BY F.E.C. AS SHOWN ON PLAN.
 - SPRINKLER HEADS IN FREEZER BOXES WILL BE ADEQUATELY PROTECTED AGAINST FREEZING UP BY GENERAL CONTRACTOR.
 - MAKE-UP AIR SHALL BE DELIVERED IN THE PROXIMITY OF THE EXHAUST SYSTEM IN A MANNER NOT TO CREATE UNDESIRABLE AIR TURBULENCE IN THE WORK AREA.
 - PROCEDURE FOR THE DESIGN OF ALL COMPRESSOR ROOMS: 1200 CFM'S OF AIR PER HP IS REQUIRED TO BE BROUGHT IN TO THE COMPRESSOR ROOM AND BLOWN DOWN ACROSS THE FACE OF COMPRESSORS WITH PROPER GRILLS IN WALLS TO EXHAUST SAME AMOUNT OF AIR. IF COMPRESSOR ROOM WILL EXCEED 100 DEGREES AT ANY TIME, THE AIR BROUGHT IN MUST BE COOLED.
 - WHERE COMPRESSORS ARE INSTALLED OUTSIDE OF BUILDING, PROPER HOUSING OVER UNITS IS TO BE FURNISHED BY THE REFRIGERATION CONTRACTOR w/THE PROPER GRILLS, IF REQUIRED, TO MAINTAIN SUFFICIENT AIR MOVEMENT ACROSS CONDENSERS. HOUSING AND GRILLS MUST COMPLY w/LOCAL BUILDING CODES.
 - THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR AND SHALL HAVE INCLUDED IN THIS SCOPE OF WORK, ALL WORK NECESSARY TO PROPERLY COORDINATE AND FACILITATE THE INSTALLATION OF ALL F.E.C. AND OWNER SUPPLIED TRADE FIXTURES AND EQUIPMENT. THIS WORK SHALL INCLUDE ALL NECESSARY CORE DRILLING, SLEEVES THROUGH WALLS, CEILINGS, FLOORS, COLUMNS, AND BEAMS FOR THE PASSAGE OF LINES & CONTROL WIRING. IT SHALL ALSO INCLUDE ALL EMPTY CONDUITS, ALL CONCRETE EQUIPMENT PADS/CURBS, ALL PLUMBING AND ELECTRICAL REQUIREMENTS AS DESCRIBED ON EQUIPMENT SCHEDULES AND PLUMBING/ELECTRICAL ROUGH-IN PLANS, ALL DUCT SHAFTS, WALL BACKING, AND INSTALLATION OF ALL F.E.C. CANTILEVER BRACKETS AS SHOWN ON THESE PLANS.
 - FIRE EXTINGUISHER CABINET, SEMI-RECESSED AND WITH A HANDLE, SUPPLIED AND INSTALLED BY G.C.
 - VERIFY LOCATIONS OF HIGH AND LOW-BACKED BOOTHS BEFORE FABRICATION.
 - SEE SHEET E5 FOR LOCATIONS OF REMOTE REFRIG. ITEMS #K35A, K43A, & K78.
 - FOR FINAL EQUIPMENT LOCATION AND TYPE REFER TO KITCHEN EQUIPMENT SUPPLIER SHEETS.
 - CUT HOLES FOR OIL PANS IN K21 IN FIELD WHEREVER POSSIBLE.
 - ITEMS NOT SHOWN: # K35A, K43A, K44C, K87A,B, K114C, K143.