

# GEOTECHNICAL EVALUATION REPORT

**CORTLAND APARTMENT HOMES**

5255 East Cortland Boulevard  
Flagstaff, Arizona  
WT Reference No. 2529JW029

**PREPARED FOR:**

Flagstaff Terrace Apartments, Inc.  
PO Box 3568  
Flagstaff, Arizona 86003  
Attn: Mr. Richard Reece

May 8, 2019



Gregory L. E. Burr, R.G.  
Geotechnical Project Manager



Craig P. Wiedeman, P.E.  
Senior Geotechnical Engineer





**Western  
Technologies Inc.**  
The Quality People  
Since 1955

2400 East Huntington Drive  
Flagstaff, Arizona 86004-8934  
(928) 774-8700 • fax 774-6469

May 8, 2019

Flagstaff Terrace Apartments  
PO Box 3568  
Flagstaff, Arizona 86003

Attn: Mr. Richard Reece

Re: Geotechnical Evaluation  
Cortland Apartment Homes  
5255 East Cortland Boulevard  
Flagstaff, Arizona

Job No. 2529JW029

Western Technologies Inc. has completed the geotechnical evaluation for the proposed apartment complex to be located in Flagstaff, Arizona. This study was performed in general accordance with our proposal number 2529PW048 dated March 27, 2019. The results of our study, including the boring location diagram, laboratory test results, boring logs, and the geotechnical recommendations are attached.

We have appreciated being of service to you in the geotechnical engineering phase of this project and are prepared to assist you during the construction phases as well. If design conditions change, or if you have any questions concerning this report or any of our testing, inspection, design and consulting services, please do not hesitate to contact us. We look forward to working with you on future projects.

Sincerely,  
WESTERN TECHNOLOGIES, INC.  
Geotechnical Engineering Services

Gregory L. E. Burr, R.G.  
Geotechnical Project Manager

Copies to: Addressee (emailed)

**TABLE OF CONTENTS**

	Page No.
<b>1.0 PURPOSE .....</b>	<b>1</b>
<b>2.0 PROJECT DESCRIPTION .....</b>	<b>1</b>
<b>3.0 SCOPE OF SERVICES.....</b>	<b>2</b>
3.1 Field Exploration .....	2
3.2 Laboratory Analyses.....	2
3.3 Analyses and Report .....	3
<b>4.0 SITE CONDITIONS.....</b>	<b>3</b>
4.1 Surface .....	3
4.2 Subsurface.....	3
<b>5.0 GEOTECHNICAL PROPERTIES.....</b>	<b>4</b>
5.1 Laboratory Tests.....	4
5.2 Field Tests.....	4
<b>6.0 RECOMMENDATIONS.....</b>	<b>4</b>
6.1 General.....	4
6.2 Design Considerations.....	5
6.3 Foundations .....	5
6.4 Lateral Design Criteria.....	6
6.5 Slab-on-Grade Support .....	7
6.6 Drainage.....	8
6.7 Corrosivity to Concrete .....	9
6.8 Pavements.....	9
6.8.1 Pavement Analyses .....	10
<b>7.0 EARTHWORK.....</b>	<b>10</b>
7.1 General.....	10
7.2 Site Clearing .....	11
7.3 Excavation .....	11
7.4 Foundation Preparation.....	11
7.5 Interior Slab Preparation.....	11
7.6 Pavement Preparation .....	12
7.7 Materials .....	12
7.8 Placement and Compaction .....	13
7.9 Compliance.....	13
<b>8.0 ADDITIONAL SERVICES .....</b>	<b>14</b>
<b>9.0 LIMITATIONS .....</b>	<b>14</b>
<b>10.0 CLOSURE.....</b>	<b>15</b>

**TABLE OF CONTENTS (Continued)**

**BORING LOCATION DIAGRAM** ..... Plate 1

**APPENDIX A**

Definition of Terminology .....A-1  
Method of Soil Classification .....A-2  
Boring Log Notes.....A-3  
Boring Logs.....A-4 to A-13

**APPENDIX B**

Laboratory Tests ..... B-1 to B-7

**GEOTECHNICAL EVALUATION  
CORTLAND APARTMENT HOMES  
APN #113-37-002F  
5255 EAST CORTLAND BOULEVARD  
FLAGSTAFF, ARIZONA  
JOB NO. 2529JW029**

**1.0 PURPOSE**

This report contains the results of our geotechnical evaluation for the proposed apartment complex to be located at 5255 East Cortland Boulevard in Flagstaff, Arizona. The purpose of these services is to provide information and recommendations regarding:

- foundation design parameters
- floor slab support
- lateral earth pressures
- earthwork
- on-site pavement sections
- drainage
- corrosivity to concrete

Results of the field exploration, field tests, and laboratory testing program are presented in the Appendices.

**2.0 PROJECT DESCRIPTION**

Based on information provided by Mr. Richard Reece with Reece and Rowe Architects, PLLC, the proposed project will consist of three, two-story apartment buildings with a total plan area of approximately 27,575 square feet to be constructed on a 7.92-acre lot. The structures will use wood frame and/or masonry construction with slab-on-grade floors. Maximum wall and column loads for the structures are assumed to be 3.5 kips per linear foot and 40 kips, respectively. We anticipate no extraordinary slab-on-grade criteria and that the finished floor levels will be within about 2 to 3 feet of the existing site grades. Final site grading plans were not available prior to preparation of this report. On-site pavement will be included as part of the development. Should any of our information or assumptions not be correct, we request that the Client notify Western Technologies (WT) immediately.

### **3.0 SCOPE OF SERVICES**

#### **3.1 Field Exploration**

Six borings were drilled to depths ranging from about 18 to 19 feet below existing site grades in the proposed building areas. In addition, four borings were each drilled to a depth of about 5 feet in proposed pavement areas. The borings were at the approximate locations shown on the attached boring location diagram. Logs of the borings are presented in Appendix A. Subsoils encountered during drilling were examined visually and sampled at selected depth intervals.

A field log was prepared for each boring. These logs contain visual classifications of the materials encountered during drilling as well as interpolation of the subsurface conditions between samples. Final logs, included in Appendix A, represent our interpretation of the field logs and include modifications based on laboratory observations and tests of the field samples. The final logs describe the materials encountered, their thicknesses, and the locations where samples were obtained. The Unified Soil Classification System was used to classify soils. The soil classification symbols appear on the boring logs and are briefly described in Appendix A.

#### **3.2 Laboratory Analyses**

Laboratory analyses were performed on representative soil samples to aid in material classification and to estimate pertinent engineering properties of the on-site soils for preparation of this report. Testing was performed in general accordance with applicable ASTM and Arizona methods. The following tests were performed and the results are presented in Appendix B.

- Water content
- Dry density
- Compression
- Expansion
- Gradation
- Plasticity
- Soluble salts/sulfates/chlorides

Test results were utilized in the development of the recommendations contained in this report.

### **3.3 Analyses and Report**

This geotechnical evaluation report includes a description of the project, a discussion of the field and laboratory testing programs, a discussion of the subsurface conditions, and design recommendations as required to satisfy the purpose previously described.

This report is for the exclusive purpose of providing geotechnical engineering and/or testing information and recommendations. The scope of services for this project does not include, either specifically or by implication, any environmental assessment of the Site or identification of contaminated or hazardous materials or conditions. If the owner is concerned about the potential for such contamination, other studies should be undertaken. We are available to discuss the scope of such studies with you.

## **4.0 SITE CONDITIONS**

### **4.1 Surface**

At the time of our field exploration, the Site was an undeveloped commercial lot. The Site was bordered on the north by Country Club Terrace Apartments, to the west by Country Club Meadows Apartments, and to the south and east by Big Fill Lake. The ground surface was relatively flat and contained embedded rhyolite cobbles and boulders throughout the Site. Site surface drainage appeared to be fair to poor by means of sheet flow to the east into Big Fill Lake. Evidence of previous surface water ponding was observed throughout the Site. No water was present in Big Fill Lake at the time of our exploration. Vegetation consisted of a moderate growth of native bushes, grasses, and weeds, and a few small pine trees.

### **4.2 Subsurface**

As presented on the boring logs, surface and subsoils extending to the depths of about 8 to 14 feet consisted of medium dense to very dense Silty SANDS with variable amounts of gravel and non-plastic fines. The soils were underlain by severely to moderately weathered, medium to thickly bedded, moderately hard to hard LIMESTONE with moderately close to wide fracture spacing that extended to the full depth of exploration in all the building borings. Groundwater was not encountered in any boring at the time of exploration. The logs in Appendix A show details of the subsurface conditions encountered during the field exploration.

The boring logs included in this report are indicators of subsurface conditions only at the specific location and date noted. Variations from the field conditions represented by the borings may become evident during construction. If variations appear, we should be contacted to re-evaluate our recommendations.

## 5.0 GEOTECHNICAL PROPERTIES

### 5.1 Laboratory Tests

Laboratory test results indicate that native subsoils located near anticipated shallow foundation levels exhibit low to moderate compressibility at existing water contents. Low to moderate additional compression occurs when the water content is increased. When water is added to compacted near-surface soils, no expansion occurs.

### 5.2 Field Tests

Native subsoils located near and below anticipated shallow foundation levels exhibited moderate to high resistance to penetration using test method ASTM D3550. This corresponds to a moderate bearing capacity for native soils in their present condition.

## 6.0 RECOMMENDATIONS

### 6.1 General

Recommendations contained in this report are based on our understanding of the project criteria described in Section 2.0, **PROJECT DESCRIPTION**, and the assumption that the soil and subsurface conditions are those disclosed by the borings. Others may change the plans, final elevations, number and type of structures, foundation loads, and floor levels during design or construction. Substantially different subsurface conditions from those described herein may be encountered or become known. Any changes in the project criteria or subsurface conditions shall be brought to our attention in writing.

## 6.2 Design Considerations

It is suspected that cobbles and boulders will be encountered. These oversized materials, greater than 3 inches, could present construction difficulties for foundation, utility trenches and other excavations.

## 6.3 Foundations

If the recommendations contained in this report are followed, the proposed structures can be supported by conventional shallow spread footings bearing on dense, undisturbed subsoils and/or properly compacted, low expansive, engineered fill. Alternative footing depths and design bearing capacities are presented in the following tabulation:

<b>Footing Depth Below Finished Grade (ft)<sup>1</sup></b>	<b>Design Bearing Capacity (psf)<sup>2</sup></b>
1.5	2000
2.5 <sup>3</sup>	2500

<sup>1</sup> Finished grade is the lowest adjacent grade for perimeter footings and floor level for interior footings.

<sup>2</sup> Allowable bearing capacities assume fulfillment of **EARTHWORK** recommendations.

<sup>3</sup> Minimum perimeter footing depth based on anticipated frost penetration and recommended bearing capacity.

We anticipate that total settlement of the proposed structures, supported as recommended, should be less than 1 inch. Differential settlement should be less than ¾ inch. Additional foundation movements could occur if water from any source infiltrates the foundation soils. Therefore, proper drainage should be provided in the final design and during construction. The design bearing capacities apply to dead loads plus design live load conditions. Recommended minimum widths of column and wall footings are 24 inches and 16 inches, respectively. The bearing values given are net bearing values and the weight of the concrete in the footings may be ignored.

Thickened slab sections can be used to support interior partitions, provided that loads do not exceed 900 pounds per linear foot, thickened sections have a minimum width of 12 inches, and thickness and reinforcement are consistent with structural requirements.

All footings, stem walls, and any masonry walls should be reinforced to reduce the potential for distress caused by differential foundation movements. The use of joints at openings or other discontinuities in any masonry walls is recommended.

We recommend that the geotechnical engineer or his representative observe the footing excavations before reinforcing steel and concrete are placed. It should be determined whether the soils exposed are similar to those anticipated for support of the footings. Any soft, loose or unacceptable soils should be undercut to suitable materials and backfilled with either lean mix or structural concrete.

#### 6.4 Lateral Design Criteria

For cantilevered walls above any free water surface with level backfill and no surcharge loads, recommended equivalent fluid pressures and coefficients of base friction for unrestrained elements are:

- Active:
  - Undisturbed subsoil .....36 psf/ft
  - Compacted granular backfill .....30 psf/ft
  - Compacted site soils .....36 psf/ft
  
- Passive:
  - Shallow wall footings .....225 psf/ft
  - Shallow column footings.....350 psf/ft
  
- Coefficient of base friction..... 0.35\*

\* The coefficient of base friction should be reduced to 0.25 when used in conjunction with passive pressure.

Where the design includes restrained elements, the following equivalent fluid pressures are recommended:

- At-rest:
  - Undisturbed subsoil .....62 psf/ft
  - Compacted granular backfill .....55 psf/ft

These lateral earth pressures are not applicable for submerged soils. We should be consulted for additional recommendations if such conditions are to be included in the design. Any surcharge from adjacent loadings must also be considered. Walls below grade should be waterproofed.

We recommend a free-draining soil layer or manufactured geocomposite material, be constructed adjacent to the back of the retaining wall. A filter may be required between the soil backfill and drainage layer. This drainage zone should help prevent hydrostatic pressure buildup. This vertical drain should be tied into a gravity drainage system at the base of the retaining wall. It is important that all backfill be properly placed and compacted. Backfill should be mechanically compacted in layers. Flooding or jetting should not be permitted. Care should be taken not to damage the walls when placing the backfill. Backfills should be inspected and tested during placement.

Fill against footings, stem walls and retaining walls should be compacted to densities specified in **EARTHWORK**. Medium to high plasticity clay soils should not be used as backfill against retaining walls. Compaction of each lift adjacent to walls should be accomplished with hand-operated tampers or other lightweight compactors. Overcompaction may cause excessive lateral earth pressures which could result in wall movements.

## **6.5 Slab-on-Grade Support**

Floor slabs can be supported on properly placed and compacted, low expansive, engineered fill or approved, properly recompacted native soils. For design of interior slabs-on-grade, we recommend using a modulus of subgrade reaction (k) of 225 pounds per cubic inch (pci) for the on-site soils or imported fill material. The slab subgrade should be prepared by the procedures outlined in this report. A minimum 4-inch thick layer of base course should be provided beneath all slabs to help prevent capillary rise and a damp slab. The use of vapor retarders is desirable for any slab-on-grade where the floor will be covered by products using water based adhesives, wood, vinyl backed carpet, impermeable floor coatings (urethane, epoxy, acrylic terrazzo, etc.) or where the floor will be in contact with moisture sensitive equipment or product. When used, the design and installation should be in accordance with the guidance provided in ACI 302.1R and 302.2R. Final determination on the use of a vapor retarder should be left to the slab designer.

All concrete placement and curing operations should follow the American Concrete Institute manual recommendations. Improper curing techniques and/or high slump

(water-cement ratio) could cause excessive shrinkage, cracking or curling. The plastic properties of the concrete should be documented at the time of placement and specimens should also be prepared for strength testing to verify compliance with project specifications. Concrete slabs should be allowed to cure adequately before placing vinyl or other moisture sensitive floor covering.

## **6.6 Drainage**

The major cause of soil-related foundation and slab-on-ground problems is moisture increase in soils below structures. Properly functioning conventional foundations and floor slabs-on-ground require appropriately constructed and maintained site drainage conditions. Therefore, it is extremely important that positive drainage be provided during construction and maintained throughout the life of the structures. It is also important that proper planning and control of landscape and irrigation practices be performed.

Infiltration of water into utility or foundation excavations must be prevented during construction. Backfill against footings, exterior walls, and in utility and sprinkler line trenches should be well compacted and free of all construction debris to minimize the possibility of moisture infiltration. If utility line trenches are backfilled with clay or clayey soils, care should be taken not to over-compact the backfill. However, if the trenches are backfilled with granular soils, then a clay or concrete plug should be placed in the trench adjacent to the buildings to prevent water from following the trench back under the structures.

In areas where sidewalks, patios or driveways do not immediately adjoin the buildings, protective slopes should be provided with an outfall of about 5 percent for at least 10 feet from perimeter walls. Scuppers and drain pipes should be designed to provide drainage away from the structures for a minimum distance of 10 feet. Planters or other surface features that could retain water adjacent to the buildings should be avoided if at all possible. If planters and/or landscaping are adjacent to or near the structures, there will be a greater potential for moisture infiltration, soil movement and structure distress. As a minimum, we recommend the following:

- Grades should slope away from the buildings.
- Planters should slope away from the structures and should not pond water. Drains should be installed in enclosed planters to facilitate flow out of the planters.

- Only shallow rooted landscaping should be used.
- Watering should be kept to a minimum. Irrigation systems should be situated on the far side of any planting and away from the buildings to minimize infiltration beneath foundations from possible leaks.
- Trees should be planted no closer than a distance equal to three-quarters of their mature height or 15 feet, whichever is greater.

It should be understood that these recommendations will help minimize the potential for soil movement and resulting distress, but will not eliminate this potential.

### 6.7 Corrosivity to Concrete

The chemical test results indicate that the site soils are negligibly corrosive to concrete. However, in order to be consistent with standard local practice and for reasons of material availability, we recommend that Type II portland cement be used for all concrete on and below grade.

### 6.8 Pavements

Based on existing subgrade conditions, the following pavement sections are recommended for the areas indicated:

Traffic Area	Asphalt Concrete (in.)	Base Course (in.)
Passenger car parking and drives	3	4
Major access drives	4	6

Bituminous surfacing should be constructed of dense-graded, central plant-mix, asphalt concrete. Base course and asphalt concrete should conform with City of Flagstaff specifications.

Material and compaction requirements should conform to recommendations presented under **EARTHWORK**. The gradient of paved surfaces should ensure positive drainage. Water should not pond in areas directly adjoining paved sections. The native subgrade

soils will soften and lose stability if subjected to conditions which result in an increase in water content.

Due to the high static loads imposed at dumpster locations, we recommend that a rigid pavement section be considered for these areas. A minimum 6-inch thick concrete pavement over 4 inches of aggregate base course material is recommended.

### **6.8.1 Pavement Analyses**

The recommended pavement sections are based on the following conditions. This firm should be contacted if any of these conditions change so that revised recommendations can be provided, if necessary.

- a. A correlated R-value of 59 for the on-site soils which corresponds to a resilient modulus of approximately 18,000 pounds per square inch. Any required fills should be constructed using on-site or imported materials with subgrade support characteristics equal to or greater than the subgrade soils in the area being filled.
- b. Structural coefficients of 0.40 for asphalt concrete and 0.12 for aggregate base course material.
- c. A present serviceability index of 4.5, a terminal serviceability index of 2.5, an overall standard deviation of 0.35, a reliability factor of 85 percent, a drainage coefficient of 0.85, a seasonal variation factor of 3.5, and a design life of 20 years.
- d. A total 18-kip equivalent single axle load (ESAL) of 40,000 for the major access drives and 20,000 for the passenger car parking areas.

## **7.0 EARTHWORK**

### **7.1 General**

The conclusions contained in this report for the proposed construction are contingent upon compliance with recommendations presented in this section. Any excavating, trenching, or disturbance which occurs after completion of the earthwork must be backfilled, compacted and tested in accordance with the recommendations contained

herein. It is not reasonable to rely upon our conclusions and recommendations if any future unobserved and untested trenching, grading or backfilling occurs.

## **7.2 Site Clearing**

Strip and remove existing vegetation, organic topsoils, debris, trees, and any other deleterious materials from the building and pavement areas. The building area is defined as that area within the building footprint plus 5 feet beyond the perimeter of the footprint. All exposed surfaces should be free of mounds and depressions which could prevent uniform compaction.

## **7.3 Excavation**

We anticipate that excavations will require the use of heavy-duty, specialized equipment to facilitate material break up and removal. Cut and fill slopes should be constructed no steeper than 2.5:1 (horizontal:vertical) to limit erosion, and to provide slope protection. Slopes of 3:1 or flatter may be desirable for landscaping and maintenance.

On-site soils will pump or become unworkable at high water contents. Workability may be improved by scarifying and drying. Overexcavation of wet zones and replacement with drier granular materials may be necessary. The use of lightweight excavation and compaction equipment may be required to minimize subgrade pumping.

## **7.4 Foundation Preparation**

Specialized treatment of existing soils within foundation areas is not required. Remove all loose or disturbed materials from the bottoms and sides of the excavations. Prior to the placement of foundation reinforcement and concrete, surface densify the bottoms of the excavations with a jumping jack-type compactor.

## **7.5 Interior Slab Preparation**

Scarify, moisten or dry as required, and compact all subgrade soils to a minimum depth of 8 inches. The subgrade preparation should be accomplished in a manner which will result in uniform water contents and densities after compaction. All subgrade preparation in building areas should extend a minimum of 5 feet beyond perimeter footings.

## 7.6 Pavement Preparation

Prior to placement of fill and/or pavement materials, the exposed subgrade soils should be proof-rolled to verify that stable subgrade conditions exist. Any loose, soft, disturbed, or otherwise unsuitable materials should be overexcavated and replaced with engineered fill. The subgrade should then be scarified, moistened as required, and recompactd for a minimum depth of 8 inches prior to placement of fill and pavement materials.

## 7.7 Materials

a. Clean on-site native soils with a maximum dimension of 6 inches or imported materials may be used as fill material for the following:

- foundation areas
- interior slab areas
- pavement areas
- backfill

b. Frozen soils should not be used as fill or backfill.

c. Imported soils should conform to the following:

- Gradation (ASTM C136):

	percent finer by weight
6" .....	100
4" .....	85-100
¾" .....	70-100
No. 4 Sieve .....	50-100
No. 200 Sieve .....	40 (max)

- Maximum expansive potential (%)\* ..... 1.5
- Maximum soluble sulfates (%)..... 0.10

\* Measured on a sample compacted to approximately 95 percent of the ASTM D698 maximum dry density at about 3 percent below optimum water content. The sample is confined under a 100 psf surcharge and submerged.

d. Base course should conform to City of Flagstaff specifications.

**7.8 Placement and Compaction**

- a. Place and compact fill in horizontal lifts, using equipment and procedures that will produce recommended water contents and densities throughout the lift.
- b. Uncompacted fill lifts should not exceed 8 inches.
- c. No fill should be placed over frozen ground.
- d. Materials should be compacted to the following:

**Minimum Percent  
Material Compaction (ASTM D698)**

- On-site and imported soil, reworked and fill:
    - Below footings ..... 95
    - Below slabs-on-grade..... 90
    - Below pavement ..... 95
  - Aggregate base:
    - Below slabs-on-grade..... 95
    - Below pavement ..... 100
  - Backfill:
    - Nonstructural ..... 90
    - Structural ..... 95
- e. On-site and imported soils with low expansive potential and aggregate base course materials should be compacted with a moisture content in the range of 3 percent below to 3 percent above optimum.

**7.9 Compliance**

Recommendations for foundations, slabs-on-grade and pavement elements supported on compacted fills or prepared subgrade depend upon compliance with the **EARTHWORK** recommendations. To assess compliance, observation and testing should be performed under the direction of a WT geotechnical engineer. Please contact us to provide these observation and testing services.

## **8.0 ADDITIONAL SERVICES**

The recommendations provided in this report are based on the assumption that a sufficient schedule of tests and observations will be performed during construction to verify compliance. At a minimum, these tests and observations should be comprised of the following:

- Observations and testing during site preparation and earthwork;
- Observation of foundation excavations; and
- Consultation as may be required during construction.

Retaining the geotechnical engineer who developed your report to provide construction observation is the best way to verify compliance, and to help you manage the risks associated with unanticipated conditions.

## **9.0 LIMITATIONS**

This report has been prepared assuming the project criteria described in Section 2.0. If changes in the project criteria occur, or if different subsurface conditions are encountered or become known, the conclusions and recommendations presented herein shall become invalid. In any such event, contact WT to assess the effect that such variations may have on our conclusions and recommendations. If WT is not retained for the construction observation and testing services to determine compliance with this report, our professional responsibility is accordingly limited.


The recommendations presented are based entirely upon data derived from a limited number of samples obtained from widely spaced borings. The attached logs are indicators of subsurface conditions only at the specific locations and times noted. This report assumes the uniformity of the geology and soil structure between borings, however variations can and often do exist. Whenever any deviation, difference or change is encountered or becomes known, WT should be contacted.


This report is for the exclusive benefit of our client alone. There are no intended third-party beneficiaries of our contract with the client or this report, and nothing contained in the contract or this report shall create any express or implied contractual or any other relationship with, or claim or cause of action for, any third party against WT.


This report is valid until the earlier of one year from the date of issuance, a change in circumstances, or discovered variations. After expiration, no person or entity shall have any right to rely on this report without the express written authorization of WT.

## **10.0 CLOSURE**

We prepared this report as an aid to the designers of the proposed project. The comments, statements, recommendations and conclusions set forth in this report reflect the opinions of the authors. These opinions are based upon data obtained at the location of the borings, and from laboratory tests. Work on your project was performed in accordance with generally accepted standards and practices utilized by professionals providing similar services in this locality. No warranty, express or implied, is made.

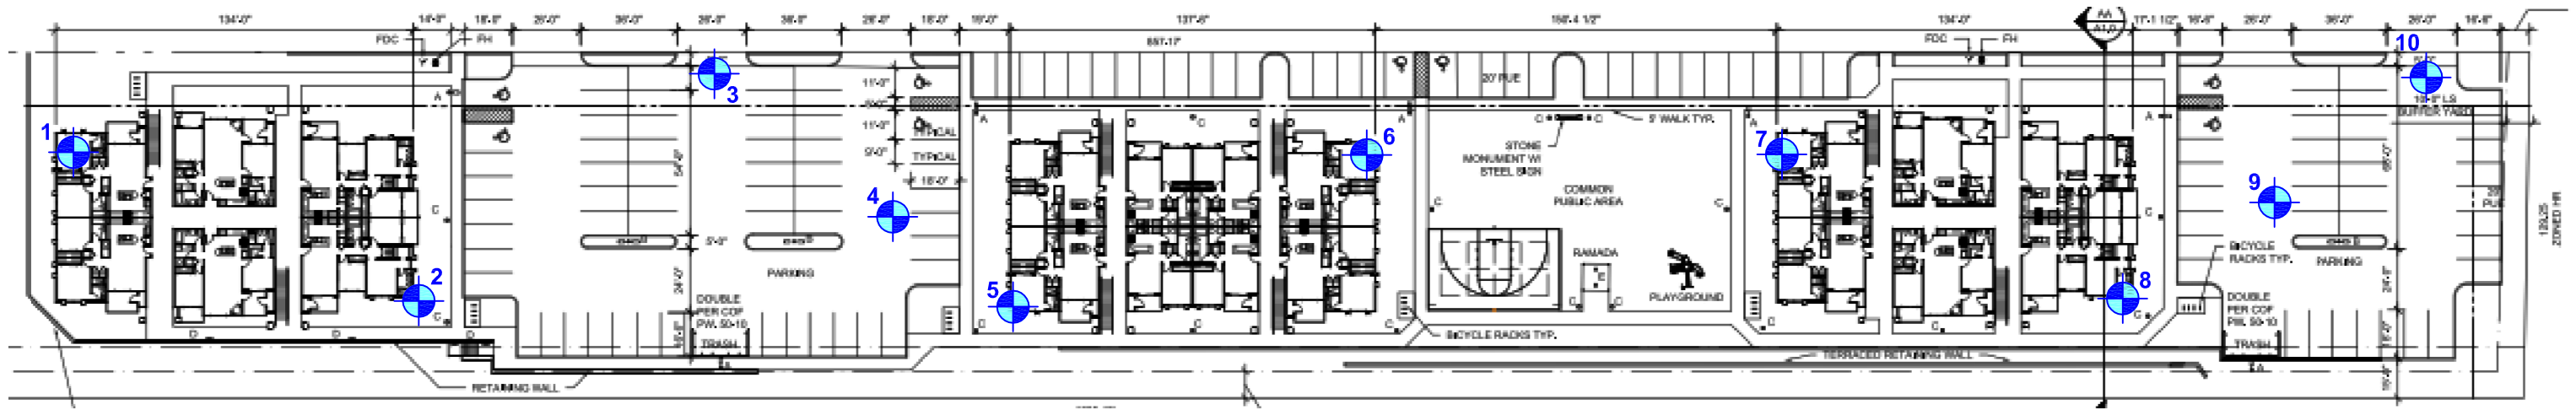

 Not to Scale

 Approximate Test Boring Location

Geotechnical  
 Environmental  
 Inspections  
 Materials



**Western  
 Technologies Inc.**  
 The Quality People  
 Since 1955

CORTLAND APARTMENT HOMES	
Boring Location Diagram	
<b>Western Technologies Inc.</b>	
Job No.: 2529JW029	Plate: 1

<b>Allowable Soil Bearing Capacity</b>	The recommended maximum contact stress developed at the interface of the foundation element and the supporting material.
<b>Backfill</b>	A specified material placed and compacted in a confined area.
<b>Base Course</b>	A layer of specified aggregate material placed on a subgrade or subbase.
<b>Base Course Grade</b>	Top of base course.
<b>Bench</b>	A horizontal surface in a sloped deposit.
<b>Caisson/Drilled Shaft</b>	A concrete foundation element cast in a circular excavation which may have an enlarged base (or belled caisson).
<b>Concrete Slabs-On-Grade</b>	A concrete surface layer cast directly upon base course, subbase or subgrade.
<b>Crushed Rock Base Course</b>	A base course composed of crushed rock of a specified gradation.
<b>Differential Settlement</b>	Unequal settlement between or within foundation elements of a structure.
<b>Engineered Fill</b>	Specified soil or aggregate material placed and compacted to specified density and/or moisture conditions under observations of a representative of a soil engineer.
<b>Existing Fill</b>	Materials deposited through the action of man prior to exploration of the site.
<b>Existing Grade</b>	The ground surface at the time of field exploration.
<b>Expansive Potential</b>	The potential of a soil to expand (increase in volume) due to absorption of moisture.
<b>Fill</b>	Materials deposited by the actions of man.
<b>Finished Grade</b>	The final grade created as a part of the project.
<b>Gravel Base Course</b>	A base course composed of naturally occurring gravel with a specified gradation.
<b>Heave</b>	Upward movement.
<b>Native Grade</b>	The naturally occurring ground surface.
<b>Native Soil</b>	Naturally occurring on-site soil.
<b>Rock</b>	A natural aggregate of mineral grains connected by strong and permanent cohesive forces. Usually requires drilling, wedging, blasting or other methods of extraordinary force for excavation.
<b>Sand and Gravel Base Course</b>	A base course of sand and gravel of a specified gradation.
<b>Sand Base Course</b>	A base course composed primarily of sand of a specified gradation.
<b>Scarify</b>	To mechanically loosen soil or break down existing soil structure.
<b>Settlement</b>	Downward movement.
<b>Soil</b>	Any unconsolidated material composed of discrete solid particles, derived from the physical and/or chemical disintegration of vegetable or mineral matter, which can be separated by gentle mechanical means such as agitation in water.
<b>Strip</b>	To remove from present location.
<b>Subbase</b>	A layer of specified material placed to form a layer between the subgrade and base course.
<b>Subbase Grade</b>	Top of subbase.
<b>Subgrade</b>	Prepared native soil surface.

**COARSE-GRAINED SOILS**  
LESS THAN 50% FINES

GROUP SYMBOLS	DESCRIPTION	MAJOR DIVISIONS
<b>GW</b>	WELL-GRADED GRAVEL OR WELL-GRADED GRAVEL WITH SAND, LESS THAN 5% FINES	GRAVELS MORE THAN HALF OF COARSE FRACTION IS LARGER THAN NO. 4 SIEVE SIZE
<b>GP</b>	POORLY-GRADED GRAVEL OR POORLY-GRADED GRAVEL WITH SAND, LESS THAN 5% FINES	
<b>GM</b>	SILTY GRAVEL OR SILTY GRAVEL WITH SAND, MORE THAN 12% FINES	
<b>GC</b>	CLAYEY GRAVEL OR CLAYEY GRAVEL WITH SAND, MORE THAN 12% FINES	
<b>SW</b>	WELL-GRADED SAND OR WELL-GRADED SAND WITH GRAVEL, LESS THAN 5% FINES	SANDS MORE THAN HALF OF COARSE FRACTION IS SMALLER THAN NO. 4 SIEVE SIZE
<b>SP</b>	POORLY-GRADED SAND OR POORLY-GRADED SAND WITH GRAVEL, LESS THAN 5% FINES	
<b>SM</b>	SILTY SAND OR SILTY SAND WITH GRAVEL, MORE THAN 12% FINES	
<b>SC</b>	CLAYEY SAND OR CLAYEY SAND WITH GRAVEL, MORE THAN 12% FINES	

**NOTE:** Coarse-grained soils receive dual symbols if they contain 5% to 12% fines (e.g., SW-SM, GP-GC).

**FINE-GRAINED SOILS**  
MORE THAN 50% FINES

GROUP SYMBOLS	DESCRIPTION	MAJOR DIVISIONS
<b>ML</b>	SILT, SILT WITH SAND OR GRAVEL, SANDY SILT, OR GRAVELLY SILT	SILTS AND CLAYS LIQUID LIMIT LESS THAN 50
<b>CL</b>	LEAN CLAY OF LOW TO MEDIUM PLASTICITY, SANDY CLAY, OR GRAVELLY CLAY	
<b>OL</b>	ORGANIC SILT OR ORGANIC CLAY OF LOW TO MEDIUM PLASTICITY	
<b>MH</b>	ELASTIC SILT, SANDY ELASTIC SILT, OR GRAVELLY ELASTIC SILT	SILTS AND CLAYS LIQUID LIMIT MORE THAN 50
<b>CH</b>	FAT CLAY OF HIGH PLASTICITY, SANDY FAT CLAY, OR GRAVELLY FAT CLAY	
<b>OH</b>	ORGANIC SILT OR ORGANIC CLAY OF HIGH PLASTICITY	
<b>PT</b>	PEAT AND OTHER HIGHLY ORGANIC SOILS	HIGHLY ORGANIC SOILS

**NOTE:** Fine-grained soils may receive dual classification based upon plasticity characteristics (e.g. CL-ML).

**SOIL SIZES**

COMPONENT	SIZE RANGE
BOULDERS	Above 12 in.
COBBLES	3 in. – 12 in.
GRAVEL	No. 4 – 3 in.
Coarse	¾ in. – 3 in.
Fine	No. 4 – ¾ in.
SAND	No. 200 – No. 4
Coarse	No. 10 – No. 4
Medium	No. 40 – No. 10
Fine	No. 200 – No. 40
Fines (Silt or Clay)	Below No. 200

**NOTE:** Only sizes smaller than three inches are used to classify soils

**CONSISTENCY**

CLAYS & SILTS	BLOWS PER FOOT
VERY SOFT	0 – 2
SOFT	3 – 4
FIRM	5 – 8
STIFF	9 – 15
VERY STIFF	16 – 30
HARD	OVER 30

**RELATIVE DENSITY**

SANDS & GRAVELS	BLOWS PER FOOT
VERY LOOSE	0 – 4
LOOSE	5 – 10
MEDIUM DENSE	11 – 30
DENSE	31 – 50
VERY DENSE	OVER 50

**NOTE:** Number of blows using 140-pound hammer falling 30 inches to drive a 2-inch-OD (1½-inch ID) split-barrel sampler (ASTM D1586).

**PLASTICITY OF FINE GRAINED SOILS**

PLASTICITY INDEX	TERM
0	NON-PLASTIC
1 – 7	LOW
8 – 20	MEDIUM
Over 20	HIGH

**DEFINITION OF WATER CONTENT**

DRY
SLIGHTLY DAMP
DAMP
MOIST
WET
SATURATED



The number shown in "**BORING NO.**" refers to the approximate location of the same number indicated on the "Boring Location Diagram" as positioned in the field by pacing or measurement from property lines and/or existing features.

"**DRILLING TYPE**" refers to the exploratory equipment used in the boring wherein **HSA = hollow stem auger**, and the dimension presented is the outside diameter of the HSA used.

"**R**" in "**BLOW COUNTS**" refers to a 3-inch outside diameter ring-lined split barrel sampler driven into the ground with a 140 pound drop-hammer dropped 30 inches repeatedly until a penetration of 12 inches is achieved or until refusal. The number of blows required to advance the sampler 12 inches is defined as the "**R**" blow count. The "**R**" blow count requires an engineered conversion to an equivalent SPT N-Value. Refusal to penetration is considered more than 50 blows per foot. A double vertical line within the symbol indicates no sample recovery. A circle within the symbol indicates sample disturbance.

"**SAMPLE TYPE**" refers to the form of sample recovery, in which **R** = Ring-lined sample and **G** = Grab sample.

"**DRY DENSITY (LBS/CU FT)**" refers to the laboratory-determined dry density in pounds per cubic foot.


"**WATER (MOISTURE) CONTENT**" (% of Dry Wt.) refers to the laboratory-determined water content in percent using the standard test method ASTM D2216.

"**USCS**" refers to the "Unified Soil Classification System" Group Symbol for the soil type as defined by ASTM D2487 and D2488. The soils were classified visually in the field, and where appropriate, classifications were modified by visual examination of samples in the laboratory and/or by appropriate tests.

These notes and boring logs are intended for use in conjunction with the purposes of our services defined in the text. Boring log data should not be construed as part of the construction plans nor as defining construction conditions.

Boring logs depict our interpretations of subsurface conditions at the locations and on the date(s) noted. Variations in subsurface conditions and characteristics may occur between borings. Groundwater levels may fluctuate due to seasonal variations and other factors.

The stratification lines shown on the boring logs represent our interpretation of the approximate boundary between soil or rock types based upon visual field classification at the boring location. The transition between materials is approximate and may be more or less gradual than indicated.

<p><i>Geotechnical Environmental Inspections Materials</i></p>  <p><b>Western Technologies Inc.</b> The <u>Quality</u> People Since 1955 wt-us.com</p>	<p><b>BORING LOG NOTES</b></p>	<p>PLATE <b>A-3</b></p>
---	--------------------------------	-----------------------------

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 1**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
13.0	99	G				SM		Silty SAND; trace to some gravel, cobbles and boulders, tan/brown, dense to very dense, damp
		R		45				
15.4	88	R		50/3"	5			LIMESTONE; white, severely to moderately weathered, moderately close to wide fracture spacing, medium to thick bedded, moderately hard to hard
16.8	97	R		50/4"	10			
9.3	92	R		50/10"	15			
10.9	90	R		50/10"				
Boring Stopped at 19 Feet								
20								

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**

PLATE  
**A-4**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 2**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
		G						
22.2	91	R		28		SM		Silty SAND; some gravel, cobbles and boulders, tan/brown, medium dense to very dense, moist to slightly damp
								decreased moisture with depth
10.8	93	R		50	5			
6.4	97	R		50/6"	10			LIMESTONE; white, severely to moderately weathered, moderately close to wide fracture spacing, medium to thick bedded, moderately hard to hard
		R		50/1"	15			
5.5	95	R		50				
								Boring Stopped at 19 Feet
					20			

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**



PLATE  
**A-5**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 3**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
12.0	99	G R		46	5	SM		Silty SAND; some gravel, cobbles and boulders, tan/brown, dense, damp
								Boring Stopped at 5 Feet

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**



PLATE  
**A-6**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 4**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
18.8	94	G R		50	5	SM		Silty SAND; trace to some gravel, cobbles and boulders, tan/brown, very dense, moist
								Boring Stopped at 5 Feet

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**

PLATE  
**A-7**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 5**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
20.0	101	G				SM		Silty SAND; some gravel, cobbles and boulders, tan/brown, dense to very dense, moist to slightly damp
		R		36				
8.7	93	R		50/9"	5			LIMESTONE; white, severely to moderately weathered, moderately close to wide fracture spacing, medium to thick bedded, moderately hard to hard
		R		50/6"	10			
7.0	91	R		50/1"	15			
		R		50/5"				
2.7	116	R						Boring Stopped at 18 Feet
					20			

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**

PLATE  
**A-8**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 6**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
		G						
18.4	94	R	50/11"			SM		Silty SAND; trace to some gravel, cobbles and boulders, tan/brown, very dense, moist
16.6	87	R	50/9"	5				
9.0	92	R	50/9"	10				LIMESTONE; white, severely to moderately weathered, moderately close to wide fracture spacing, medium to thick bedded, moderately hard to hard
6.3	96	R	50/7"	15				
5.5	112	R	50/8"					
Boring Stopped at 19 Feet								
20								

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

BORING LOG

PLATE  
**A-9**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 7**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
26.5	92	G				SM		Silty SAND; some gravel, cobbles and boulders, tan/brown, very dense, moist to damp
		R	50/10"					
12.5	100	R	50/7"	5				
11.2	97	R	50/8"	10				LIMESTONE; white, severely to moderately weathered, moderately close to wide fracture spacing, medium to thick bedded, moderately hard to hard
6.7	109	R	50/10"	15				
6.3	91	R	50/10"					
Boring Stopped at 19 Feet								
20								

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**

PLATE  
**A-10**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 8**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
18.5	88	G				SM		Silty SAND; some gravel, cobbles and boulders, tan/brown, very dense, moist to slightly damp
		R	50/10"					
13.2	100	R	50/9"	5				
5.3	95	R	50/4"	10				
7.5	93	R	50/4"	15				LIMESTONE; white, severely to moderately weathered, moderately close to wide fracture spacing, medium to thick bedded, moderately hard to hard
		R	50					
Boring Stopped at 19 Feet								
20								

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

BORING LOG

PLATE  
**A-11**

DATE DRILLED: 4-18-19  
 LOCATION: See Location Diagram  
 ELEVATION: Not Determined

**BORING NO. 9**

EQUIPMENT TYPE: CME-75  
 DRILLING TYPE: 7"HSA  
 FIELD ENGINEER: J. Quinlan

THIS SUMMARY APPLIES ONLY AT THIS LOCATION AND AT THE TIME OF LOGGING. CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH TIME. DATA PRESENTED IS A SIMPLIFICATION.

MOISTURE CONTENT (% OF DRY WT.)	DRY DENSITY (LBS/CU FT)	SAMPLE TYPE	SAMPLE	BLOWS/FT.	DEPTH (FEET)	USCS	GRAPHIC	SOIL DESCRIPTION
20.9	92	G R		28	0 5 10 15 20	SM		Silty SAND; some gravel, cobbles and boulders, tan/brown, medium dense, moist
								Boring Stopped at 5 Feet

- N- STANDARD PENETRATION TEST
- R- RING SAMPLE
- CA- CALIFORNIA MODIFIED SAMPLER
- G- GRAB SAMPLE
- B- BUCKET SAMPLE

NOTES: Groundwater Not Encountered



**WESTERN TECHNOLOGIES INC.**  
 2400 Huntington Drive  
 Flagstaff, AZ 86004-8934

PROJECT: CORTLAND APARTMENT HOMES  
 PROJECT NO.: 2529JW029

**BORING LOG**

PLATE  
**A-12**




Boring No.	Depth (ft)	USCS Class.	Particle Size Distribution (% Passing by Weight)							Atterberg Limits		Laboratory Compaction Characteristics			Remarks
			3"	¾"	#4	#10	#40	#200	2μ	LL	PI	Dry Density (pcf)	Optimum Moisture (%)	Method	
1	0-5	SM	100	98	93	83	59	37.6			NP				2
4	0-5	SM	100	96	91	82	59	37.4			NP				2
6	0-5	SM	100	99	91	79	57	36.2			NP				2
8	0-5	SM		100	86	75	54	36.1			NP				2
10	0-5	SM	100	98	93	81	58	37.4			NP				2

**NOTE:** NP = Non-plastic  
μ = microns (2μ = 0.002mm)

**REMARKS**

Classification / Particle Size / Moisture-Density Relationship

1. Visual
2. Laboratory Tested
3. Minus #200 Only
4. Test Method ASTM D698/AASHTO T99
5. Test Method ASTM D1557/AASHTO T180
6. From the ADOT Family of Curves

 <p><i>Geotechnical Environmental Inspections Materials</i> wt-us.com</p> <p><b>Western Technologies Inc.</b> The Quality People Since 1955</p>	PROJECT: CORTLAND APARTMENT HOMES JOB NO.: 2529JW029	PLATE  <b>B-1</b>
	<b>SOIL PROPERTIES</b>	

Boring No.	Depth (ft.)	USCS Class.	Initial Dry Density (pcf)	Initial Water Content (%)	Compression Properties			Expansion Properties		Plasticity		Percent Passing #200	Soluble		Remarks
					Surcharge (ksf)	Total Compression (%)		Surcharge (ksf)	Expansion (%)	LL	PI		Salts (ppm)	Sulfate (ppm)	
						In-Situ	After Saturation								
1	0-5	SM	108.9	14.6				0.1	0						1,2
4	0-5	SM	101.7	18.1				0.1	0						1,2
6	0-5	SM	106.3	15.8				0.1	0						1,2

**Notes:** Initial Dry Density and Initial Water Content are remolded.

**Remarks**

1. Compacted density (approx. 95% of ASTM D698 max. density at moisture content slightly below optimum.)
2. Submerged to approximate saturation.

*Geotechnical  
Environmental  
Inspections  
Materials*

**Western Technologies Inc.**  
 The Quality People  
 Since 1955  
 wt-us.com

PROJECT: CORTLAND APARTMENT HOMES  
 JOB #: 2529JW029

PLATE  
**B-2**

**SOIL PROPERTIES**



## Soil Analysis Report

Western Technologies - Flagstaff  
 Crockett Saline  
 2400 East Huntington  
 Flagstaff, AZ 86004-8934

Project: 2529JW029  
 Date Received: 4/25/2019  
 Date Reported: 4/30/2019  
 PO Number: 2529P011

<b>Lab Number: 928392-1</b>	<b>1 (0-5)</b>
-----------------------------	----------------

<i>Soluble Salts, Sulfate &amp; Chloride</i>	Method	Result	Units	Levels
Soluble Salts	ARIZ 237b SS	240	ppm	
Sulfate, SO4	ARIZ 733	6	ppm	
Chloride, Cl	ARIZ 736	7	ppm	


<b>Lab Number: 928392-2</b>	<b>6 (0-5)</b>
-----------------------------	----------------

<i>Soluble Salts, Sulfate &amp; Chloride</i>	Method	Result	Units	Levels
Soluble Salts	ARIZ 237b SS	193	ppm	
Sulfate, SO4	ARIZ 733	10	ppm	
Chloride, Cl	ARIZ 736	7	ppm	

<b>Lab Number: 928392-3</b>	<b>10 (0-5)</b>
-----------------------------	-----------------

<i>Soluble Salts, Sulfate &amp; Chloride</i>	Method	Result	Units	Levels
Soluble Salts	ARIZ 237b SS	443	ppm	
Sulfate, SO4	ARIZ 733	10	ppm	
Chloride, Cl	ARIZ 736	15	ppm	

# COMPRESSION TEST REPORT

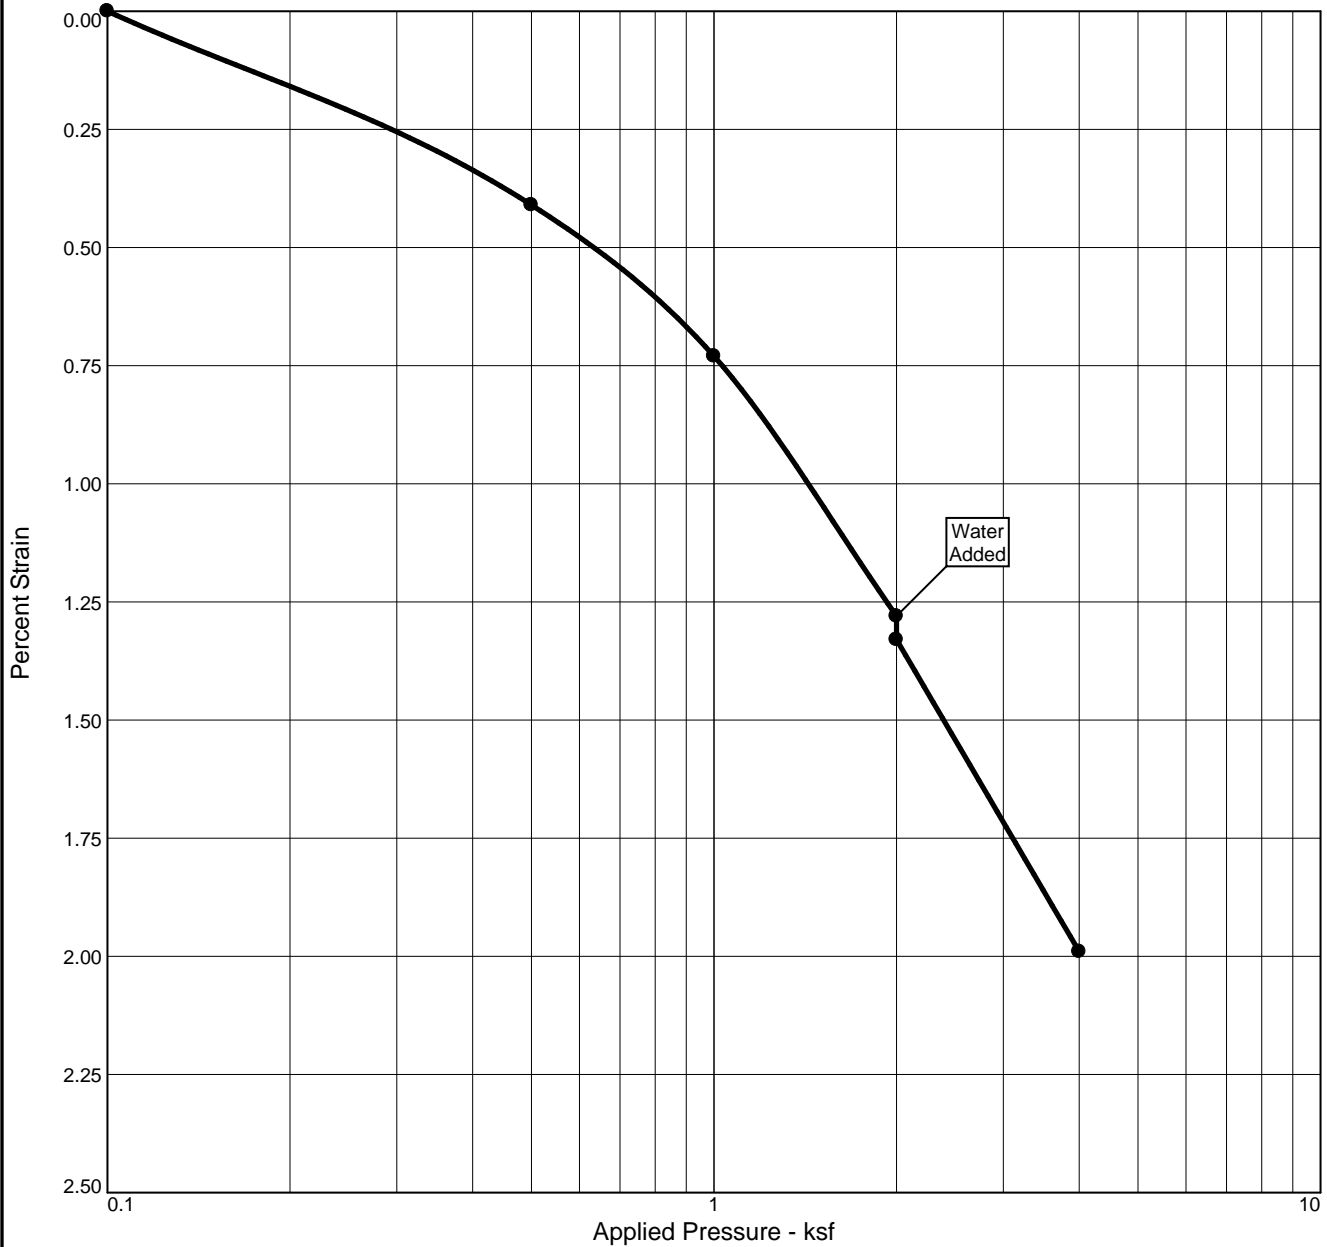


Natural Sat.	Moist.	Dry Dens. (pcf)	LL	PI	Sp. Gr.	Overburden (ksf)	e <sub>o</sub>	Swell Press. (ksf)	Clpse. %	C <sub>r</sub>
50.6 %	13.0 %	99.0			2.65		0.681		0.0	

MATERIAL DESCRIPTION	USCS	AASHTO
SILTY SAND	SM	

<p><b>Project No.</b> 2529JW029      <b>Client:</b> FLAGSTAFF TERRACE APARTMENTS, INC.</p> <p><b>Project:</b> CORTLAND APARTMENT HOMES</p> <p><b>Source:</b> RING SAMPLE      <b>Depth:</b> 2-3 FEET      <b>Sample No.:</b> BORING 1</p> <p style="text-align: center;"><b>Western Technologies, Inc.</b></p> <p style="text-align: center;"><b>Flagstaff, AZ</b></p>	<p><b>Remarks:</b></p>     <p style="text-align: right;"><b>Plate B-4</b></p>
--	--

# COMPRESSION TEST REPORT

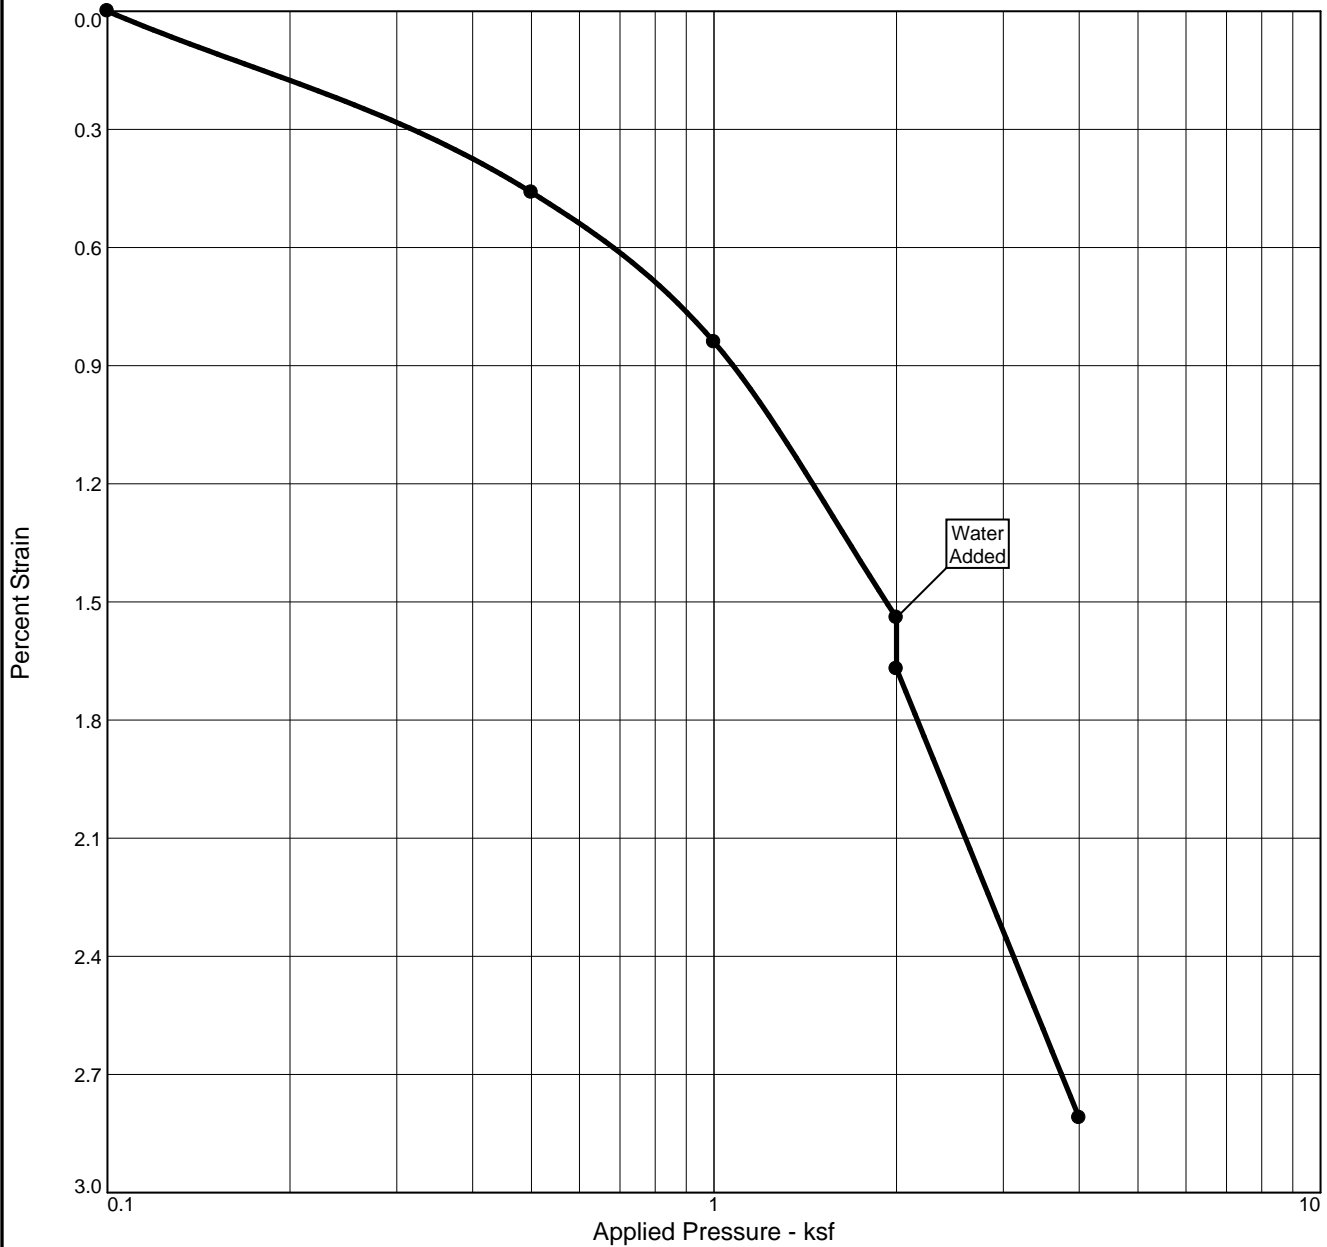


Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	Overburden (ksf)	$e_o$	Swell Press. (ksf)	Cipse. %	$C_r$
Sat.	Moist.									
77.1 %	22.2 %	90.7			2.65		0.764		0.1	

MATERIAL DESCRIPTION		USCS	AASHTO
SILTY SAND		SM	

<p><b>Project No.</b> 2529JW029      <b>Client:</b> FLAGSTAFF TERRACE APARTMENTS, INC.</p> <p><b>Project:</b> CORTLAND APARTMENT HOMES</p> <p><b>Source:</b> RING SAMPLE      <b>Depth:</b> 2-3 FEET      <b>Sample No.:</b> BORING 2</p> <p style="text-align: center;"><b>Western Technologies, Inc.</b></p> <p style="text-align: center;"><b>Flagstaff, AZ</b></p>	<p><b>Remarks:</b></p>     <p style="text-align: right;"><b>Plate B-5</b></p>
--	--

# COMPRESSION TEST REPORT

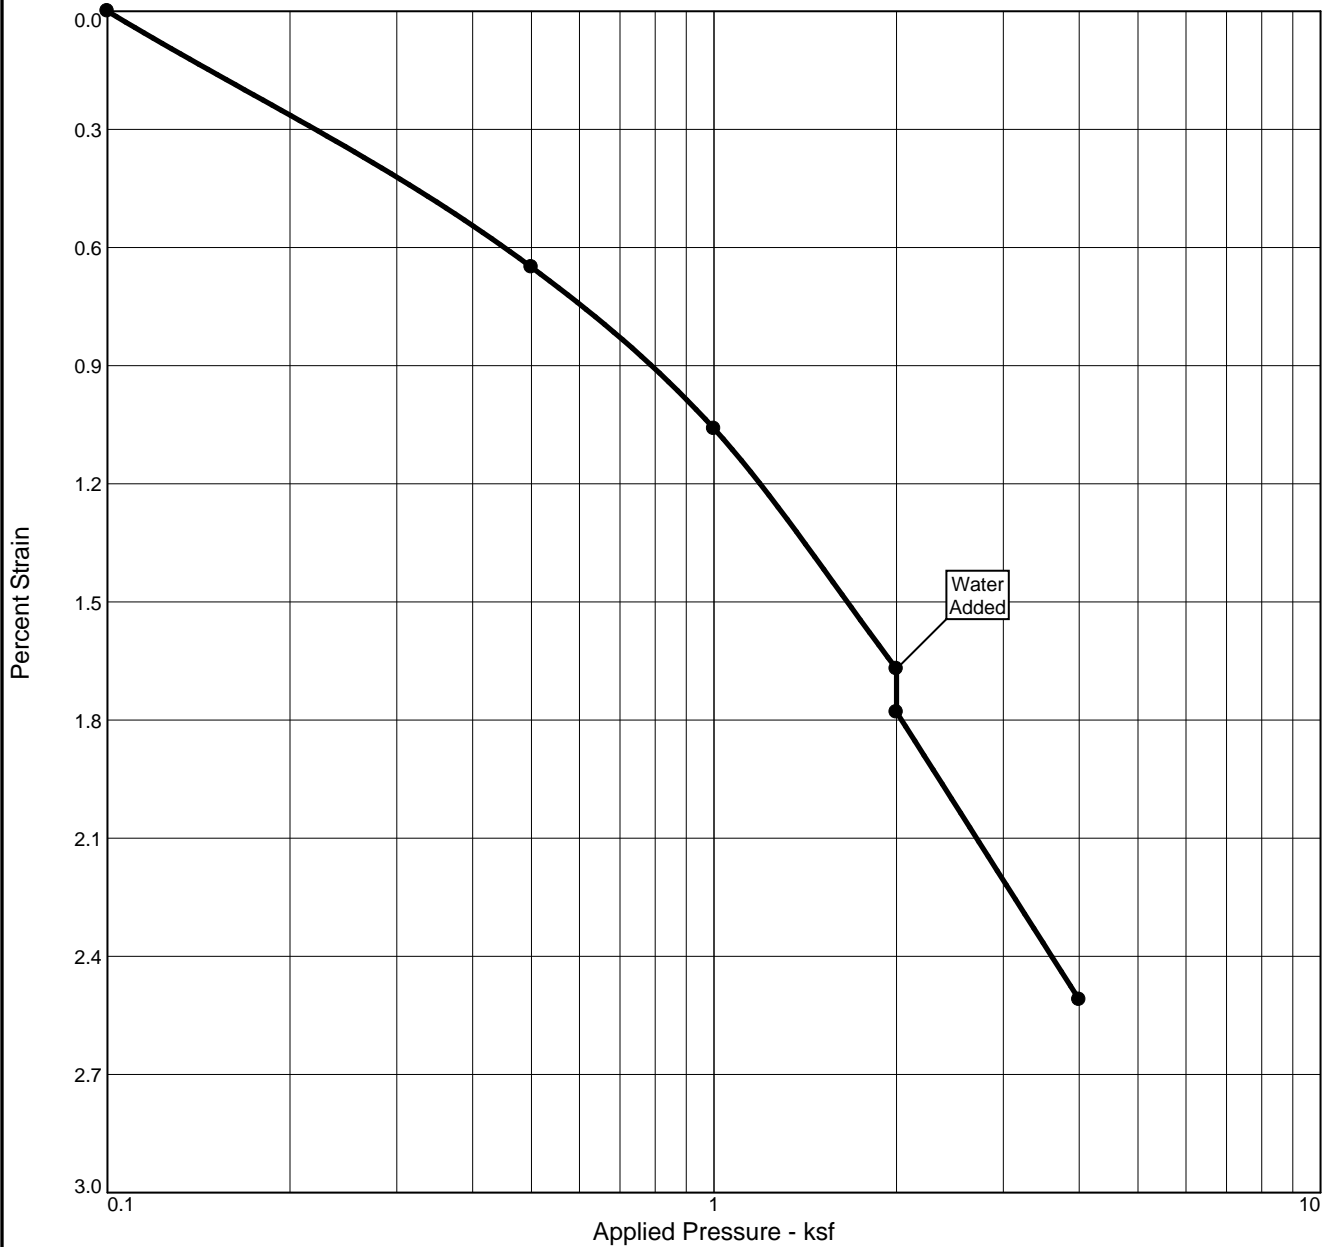


Natural Sat.	Moist.	Dry Dens. (pcf)	LL	PI	Sp. Gr.	Overburden (ksf)	e <sub>o</sub>	Swell Press. (ksf)	C <sub>ip</sub> se. %	C <sub>r</sub>
86.6 %	20.0 %	101.2			2.65		0.614		0.1	

MATERIAL DESCRIPTION	USCS	AASHTO
SILTY SAND	SM	

<p><b>Project No.</b> 2529JW029     <b>Client:</b> FLAGSTAFF TERRACE APARTMENTS, INC.</p> <p><b>Project:</b> CORTLAND APARTMENT HOMES</p> <p><b>Source:</b> RING SAMPLE     <b>Depth:</b> 2-3 FEET     <b>Sample No.:</b> BORING 5</p> <p style="text-align: center;"><b>Western Technologies, Inc.</b></p> <p style="text-align: center;"><b>Flagstaff, AZ</b></p>	<p><b>Remarks:</b></p>          <p style="text-align: right;"><b>Plate B-6</b></p>
---	--

# COMPRESSION TEST REPORT

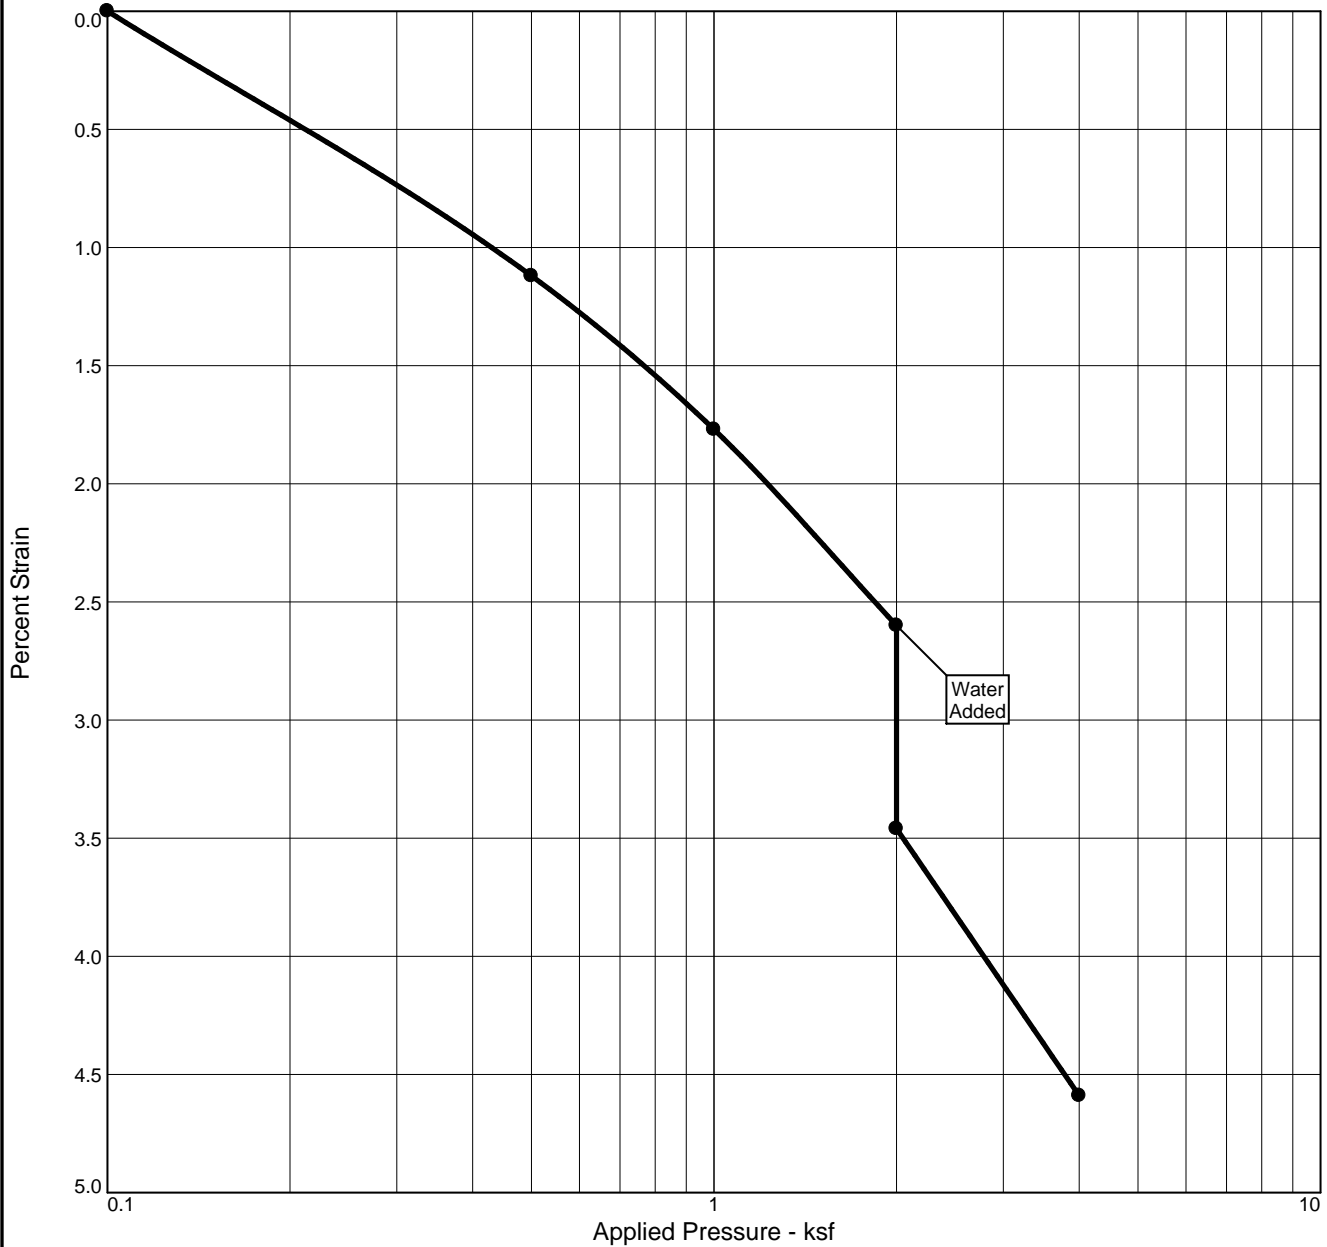

Natural	Dry Dens.	LL	PI	Sp. Gr.	Overburden	e <sub>0</sub>	Swell Press.	C <sub>p</sub> se.	C <sub>r</sub>
Sat.	Moist.	(pcf)		Gr.	(ksf)		(ksf)	%	
59.2 %	18.4 %	93.9		2.65		0.825		0.9	

<b>MATERIAL DESCRIPTION</b>	<b>USCS</b>	<b>AASHTO</b>
SILTY SAND	SM	

<p><b>Project No.</b> 2529JW029     <b>Client:</b> FLAGSTAFF TERRACE APARTMENTS, INC.</p> <p><b>Project:</b> CORTLAND APARTMENT HOMES</p> <p><b>Source:</b> RING SAMPLE     <b>Depth:</b> 2-3 FEET     <b>Sample No.:</b> BORING 6</p> <p style="text-align: center;"><b>Western Technologies, Inc.</b></p> <p style="text-align: center;"><b>Flagstaff, AZ</b></p>	<p><b>Remarks:</b></p>     <p style="text-align: right;"><b>Plate B-7</b></p>
---	--