
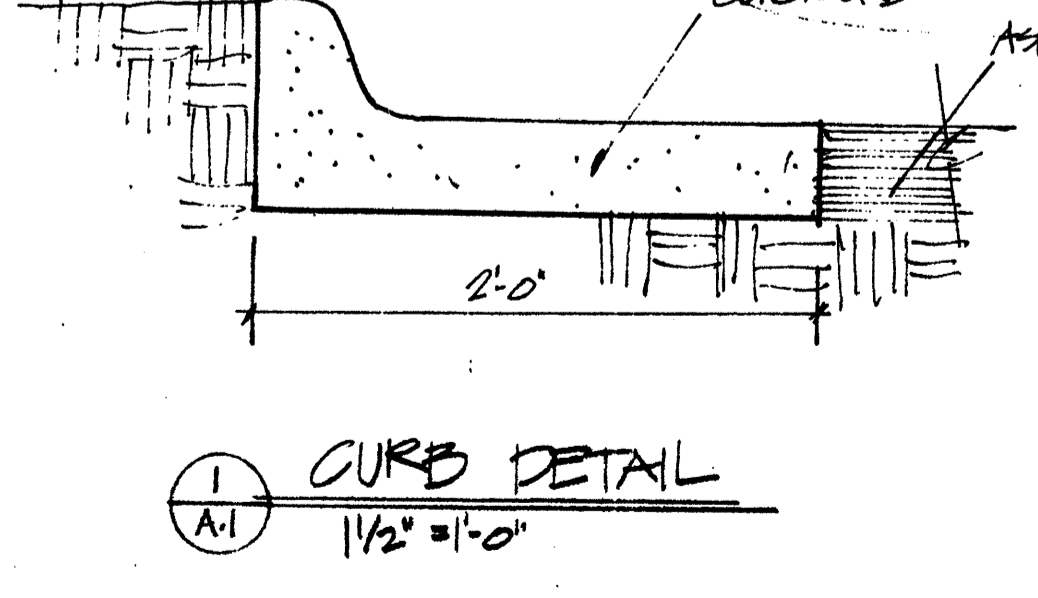


DOOR SCHEDULE													
DOOR		HARDWARE				FRAME			SPECIAL NOTES				
CODE	T	W	H	DESCPTN.	FIN.	PASS	PRIV.	LK.	FIN.	HD.	JMS	SILL	FIN.
1	FR	13/4	3'-0"	8'-0"	KAINNEEK #112			●		AL	AL	AL	PARK ANODIZED
2	FR	13/4	3'-0"	8'-0"	KAINNEEK #112			●		AL	AL	AL	" "
3	FR	13/4	2'-10"	7'-0"	36-FLUSH RD. OAK					WD	WD	W.	STAIN/PAINTED
4	FR	13/4	2'-10"	7'-0"	FLUSH BIRCH					WD	WD	WD	PAINTED
5	FR	13/4	2'-0"	7'-0"	FLUSH BIRCH					WD	WD	WD	PAINTED
6	FR	11/8	4'-0"	7'-0"	FLUSH BIRCH B-TOLD					WD	WD	WD	PAINTED
7	FR	13/4	3'-0"	7'-0"	H. METAL			●		H.M.	H.M.	H.M.	* NO HARDWARE ON EXTERIOR
8	FR	13/4	3'-0"	7'-0"	H. METAL			●		H.M.	H.M.	H.M.	PAINTED
9													
10													

FINISH SCHEDULE										
RM	NAME	FLOOR	BASE	WNSCT	N	E	S	W	CEILING	REMARKS
1	VESTITULE	TILE/MAT	-	-	-	-	-	-	8'-0" ANODIZED GR. BD.	
2	BANK LOBBY	CARPET/TILE	VINYL 4'	-	PAINTED	GYP BOARD	-	-	2" X 6" ACUSTIC	* 20 YR. AL.
3	OFFICE	CARPET	VINYL 4'	-	PAINTED	GYP BOARD	-	-		
4	OFFICE	CARPET	-	-	PAINTED	GYP BOARD	-	-		
5	MEN	SEAMLESS VINYL	-	-	VINYL WALL COVERING	-	-	-		
6	WOMEN	SEAMLESS VINYL	-	-	VINYL WALL COVERING	-	-	-		
7	TELLER AREA	CARPET	-	-	PAINTED	GYP BOARD	-	-		
8	NEW ACCOUNTS	CARPET	-	-	PAINTED	GYP BOARD	-	-		
9										
10	LEASE #1	NO FLOOR	NO BASE	-	UNPAINTED	GYP BOARD	-	-	GYP BD ON BOT. OF TRUSS	
11	LEASE #2	NO FLOOR	-	-						
12	LEASE #3	NO FLOOR	-	-						
13	VESTITULE	TILE/MAT	-	-	-	-	-	-	8'-0" GYP. BD.	
14										
15										

WINDOW SCHEDULE							
CODE	DESCRIPTION	SERIES	R.O.	FIN.	CAT. NO.	MANUF.	NOTES
A	ALUMINUM STOREFRONT	152 GLAZE 450T	5'-0" HIGH X SEE PLANS	PARK ANODIZED		KAINNEEK	
B	TELLER WINDOW	REGAL-LINE	10'-10 3/4" X 3'-0 3/8"	BLACK	121-US	DEBOLD	
C	FIXED GLASS	*	2'-0" X 6'-0"	STAINED OAK			* TEMPERED
D	CIRCLEHEAD WINDOW	VINYL CLAD	5'-11 3/4" X 3'-0 1/8"	PAINT TO MATCH STOREFRONT	CHT190	PELLA	
E							

- GENERAL NOTES:**
- THIS BUILDING WILL BE CONVENTIONALLY CONSTRUCTED AS NOTED ON PLANS. TRUSSES AND DESIGN PER LOCAL REQUIREMENTS AND PRE-ENGINEERED BY SUPPLIER.
 - WRITTEN DIMENSIONS OF THESE DRAWINGS TAKE PRECEDENCE OVER SCALED DIMENSIONS ON THE JOB. THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND THE CONDITIONS SHOWN BY THESE DOCUMENTS.
 - ALL DIMENSIONS ARE TAKEN TO STUD LINE OR MASONRY WALLS, UNLESS OTHERWISE NOTED.
 - EXTERIOR WALLS ARE 2X4 STUD, 16" O.C. OR 2X6 IF SO NOTED.
 - ALL INTERIOR PARTITIONS ARE 2X4 STUD (3 1/2"), UNLESS OTHERWISE NOTED. ALL FURRING ON INTERIOR SIDE OF MASONRY WALLS WHERE NOTED ON PLANS TO BE 1X3 PRESSURE TREATED LAID FLAT (3/4").
- CARPENTRY NOTES:**
- DESIGN LIVE LOADS: R OF 50 PSI
 - RECOMMENDED WALL FRAMING LUMBER SHALL HAVE A MINIMUM ALLOWABLE EXTREME FIBER BENDING STRESS OF 600 PSI, A MINIMUM MODULUS OF ELASTICITY OF 1,000,000 PSI AND A MINIMUM SHEAR STRESS OF 80 PSI.
 - ALL STRUCTURAL MEMBERS INCLUDING JOISTS, HEADERS AND BEAMS SHALL HAVE MINIMUM DESIGN VALUES OF: F_b=1550, F_v=1400, F_v=95 AND E=1,700,000.
 - USE 2-X2LL HEADERS OVER ALL EXTERIOR LOAD BEARING OPENINGS UNLESS NOTED OTHERWISE.
 - DOUBLE FLOOR JOISTS UNDER ALL PARALLEL PARTITIONS.
 - ALL PLATES SET ON CONCRETE TO BE PRESSURE TREATED.
 - ALL DOORS AND INTERIOR OPENINGS ARE 6'-8" HIGH UNLESS NOTED OTHERWISE.
 - TRUSS DATA TO BE SUPPLIED BY TRUSS MANUFACTURER.
 - NO STUDS TO BE NOTCHED, DRILLED ONLY.

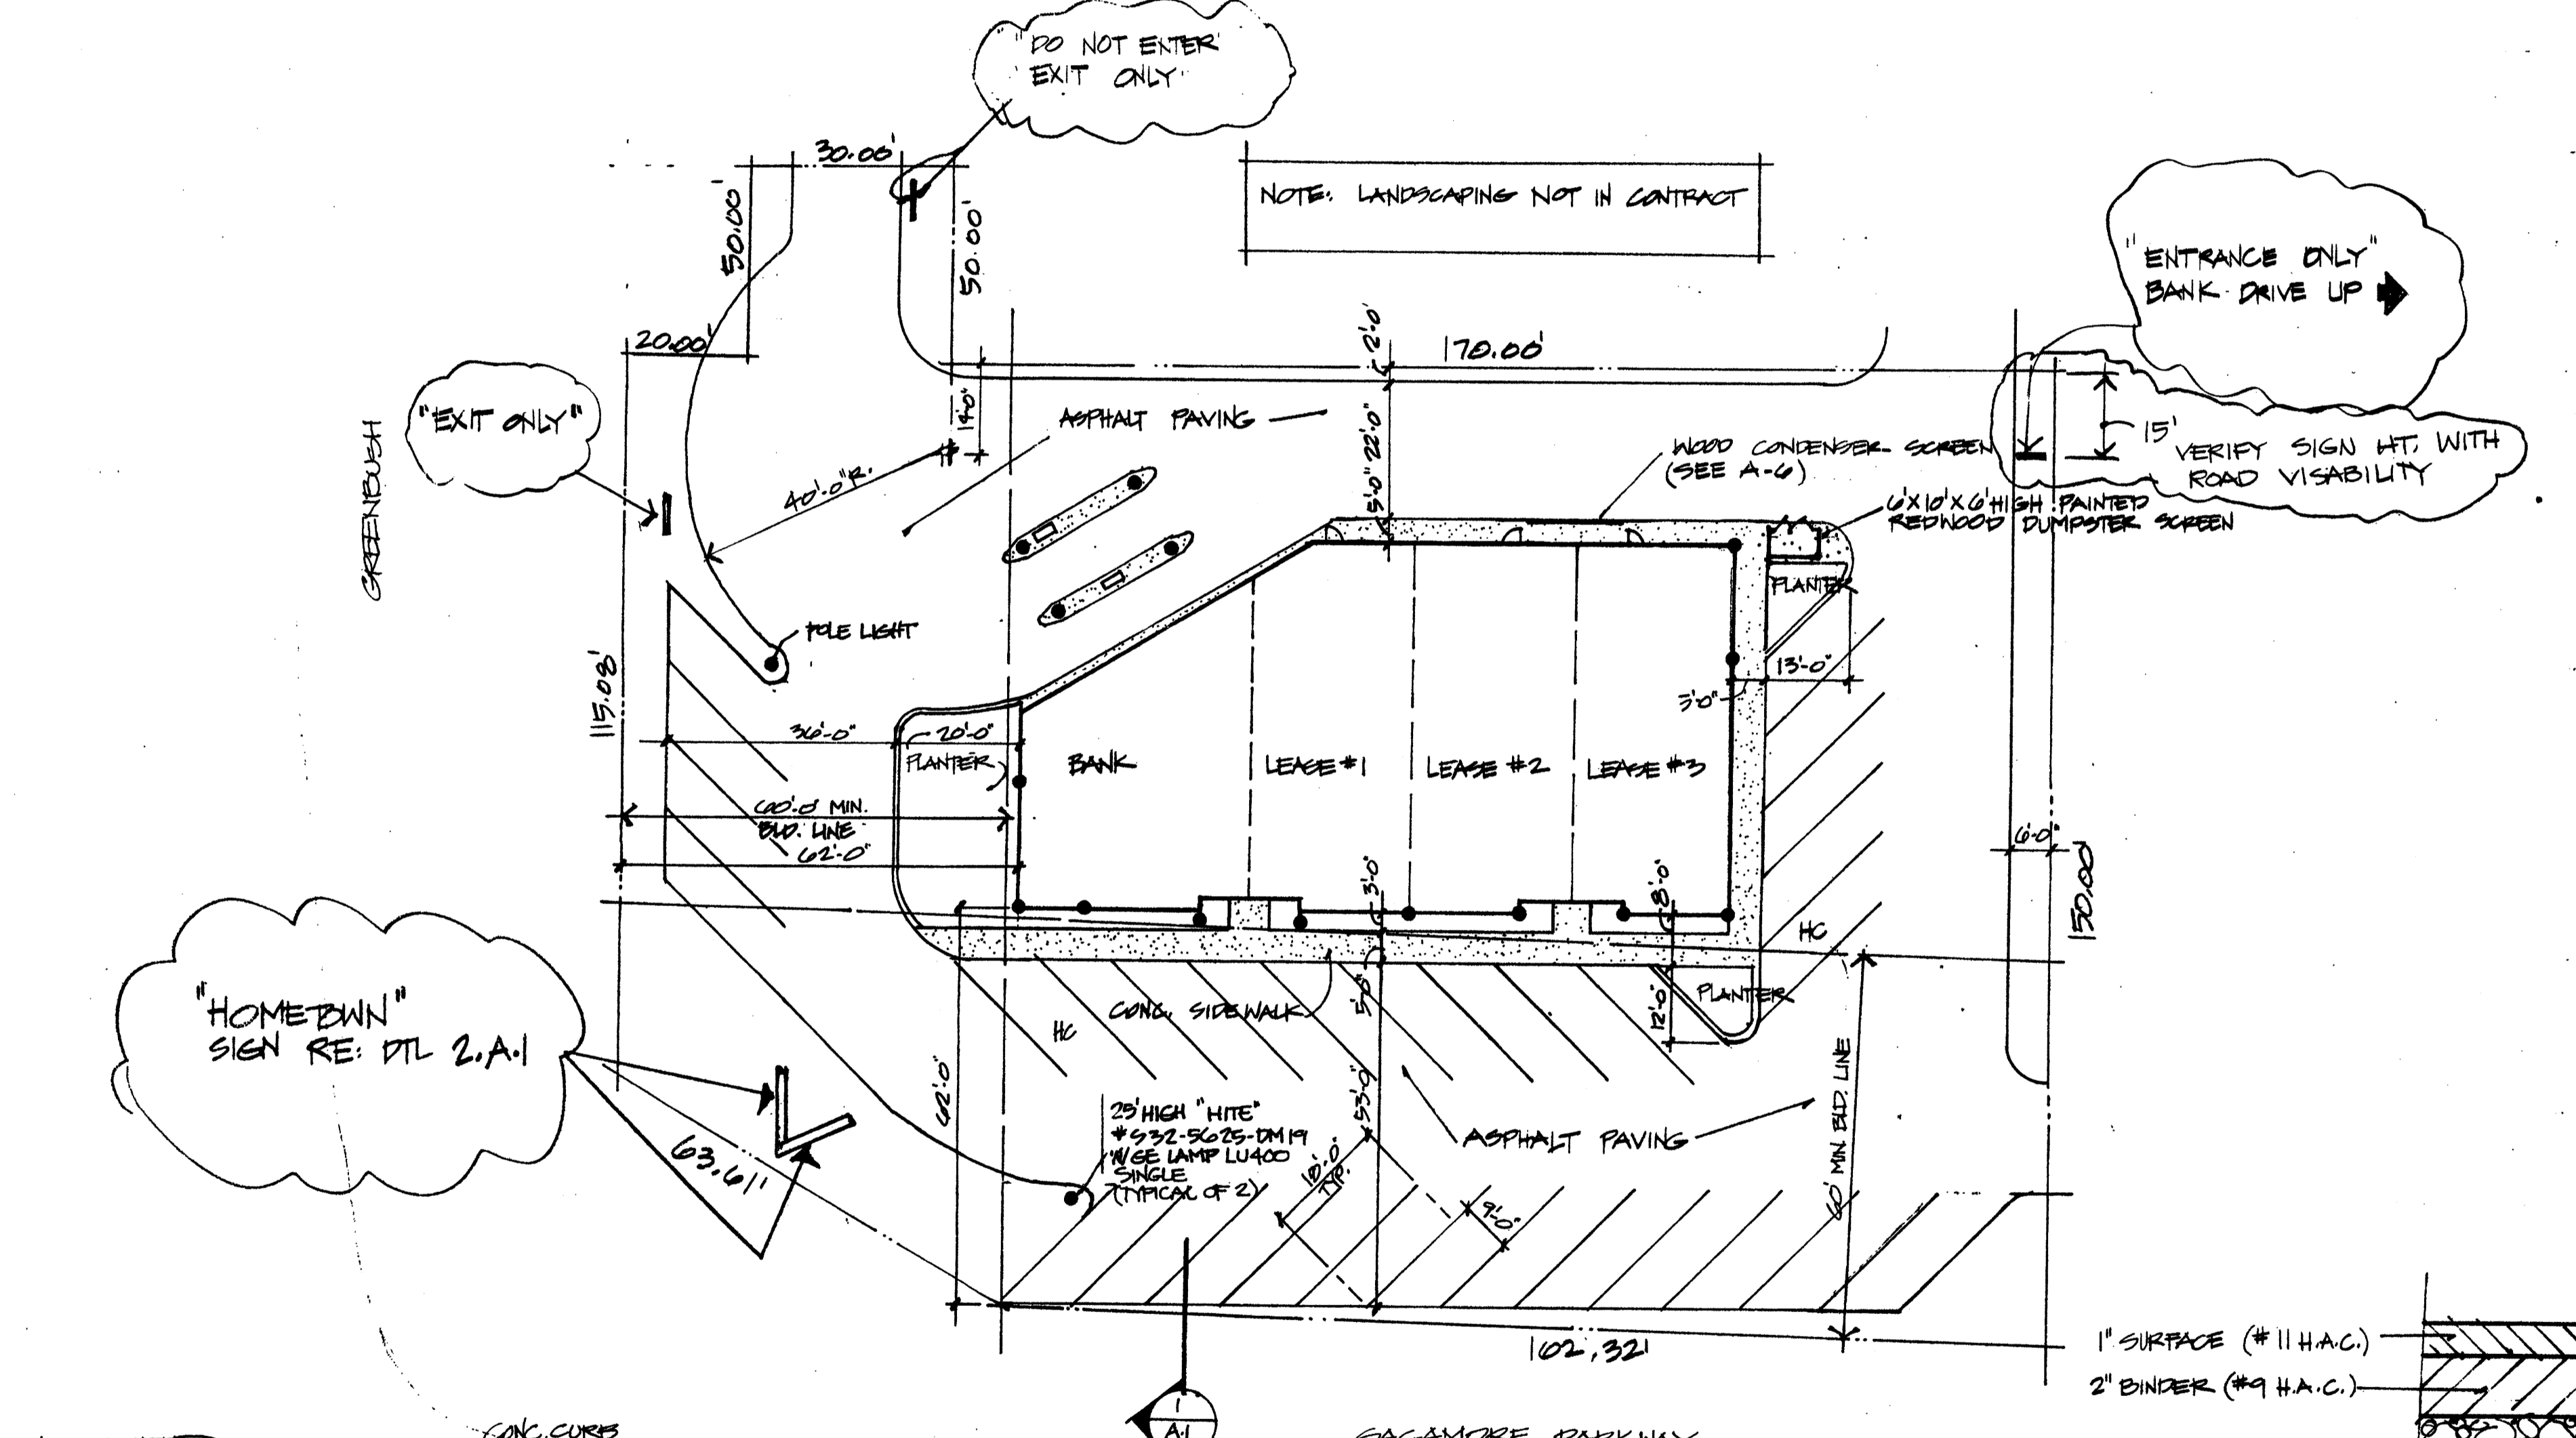

SITE PLAN
102'-32"

SITE DATA:
 PARKING: 30 CARS (2 HANDICAP)
 BLDG. SQ. FEET: 5,792 SQ. FT.
 BANK SQ. FEET: 1,512 SQ. FT.
 TOTAL LEASE AREA: 4,280 SQ. FT.
 BUILDING CLASSIFICATION: B-2

