EQUIPMENT LIST

ID# ON PLAN	EQUIPMENT	MAKE & MODEL #	NEW, USED, EXISTING	PLUMB READY YES/NO	INSTALLATION METHOD: FLOOR MOUNT – CASTERS	FLOOR MOUNT – LEGS (AT LEAST 6")	FLOOR MOUNT – SEALED IN PLACE	TABLE MOUNT – PORTABLE	TABLE MOUNT – LEGS (AT LEAST 4")	TABLE MOUNT – SEALED IN PLACE
1	ICE MAKER	MANITOWOC NEOUY*-0310A-161B	N	Y		X				
2	HAND SINK	REGENCY 12X16	N	Y			X			
3	MOP SINK	REGENCY 18" UTILITY SINK	N	Y		X				
4	REFRIGERATOR	TRUE T-23G-HC	N	N		X				
5	SYRUP/CO TANKS	COKE	N	Y		X				
6	UNDER REFRIG	TRUE TUC-36-HC	N	N	X					
7	KEGERATOR	TRUE TDD-3-HC	N	Y		X				
8	NOT USED		N	N		X				
9	ICE BIN	COCO-COLA	N	Y		X				
10	4 COMP SINK	REGENCY 72X18-3/4	N	Y		X				
11	PIZZA OVEN	WARING WPO350	N	N				X		
12	COOKER BURNER	YESCOM 5500W	N	N				X		
13	WARMER	AVANTCO W500CR	N	N				X		
14	WORK TABLE	REGENCY 30"X72"	N	N		X				
15	WORK TABLE	REGENCY 24"X24"	N	N		X				
16	SANDWICH PRESS	AVANTCO P88SS	N	N				X		
17	FREEZER	GALAXY CF13HC	N	N		X				

1 A1 EQUIPMENT LIST
NTS

ROOM FINISH SCHEDULE

ROOM NAME	FLOOR	CEILING	WALLS
DINING	SEALED CONCRETE	WOOD	PAINT
PREP KITCHEN	SEALED CONCRETE	WASHABLE PAINT	WASHABLE PAINT
BAR	SEALED CONCRETE	WOOD	WASHABLE PAINT
ASSESSIBLE TOILET	SEALED CONCRETE	PAINT	WASHABLE PAINT
TOILET	SEALED CONCRETE	PAINT	WASHABLE PAINT

KNEE SPACE UNDER KITCHEN AND DINING BARS TO BE WOOD WALL
BACKSPLASH AT BAR TO BE TILE

2 A1 ROOM FINISH SCHEDULE
NTS

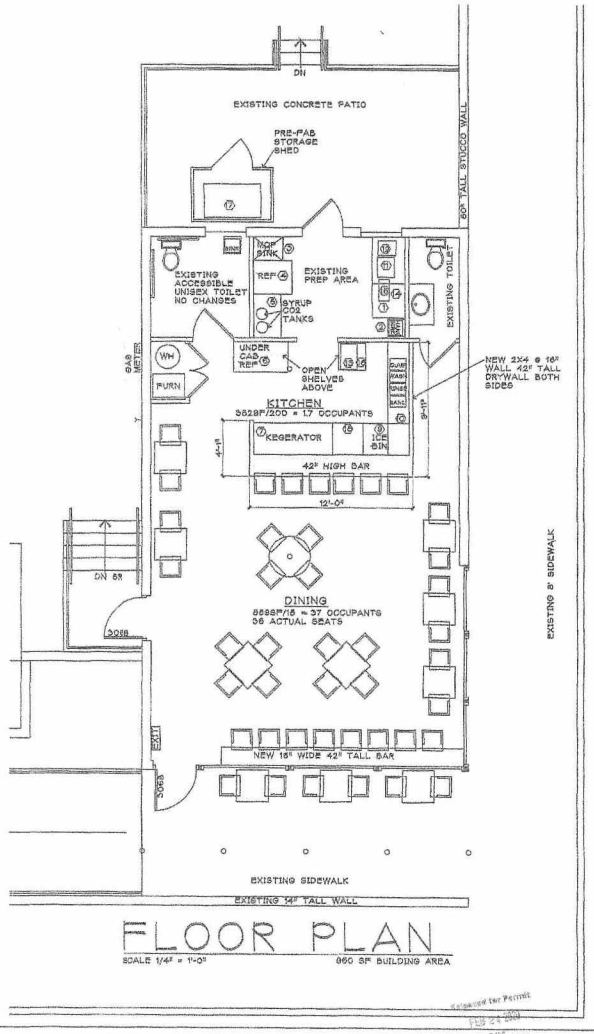

FLOOR PLAN

SCALE 1/4" = 1'-0" 860 SF BUILDING AREA

3 A1 MAIN FLOOR PLAN
SCALE 1/4" = 1'-0"

SEAL

DATE
2-3-20

REVISIONS

RHAPSODY INTERIOR REMODEL
121 W. MIDLAND AVE.
LOT 1, BLOCK 4, BERGSTROM ADDN
WOODLAND PARK, COLORADO

CRS Architects, LLC
1231 Rampart Range Road
Woodland Park, CO 80863
719-331-8179

SHEET
A1