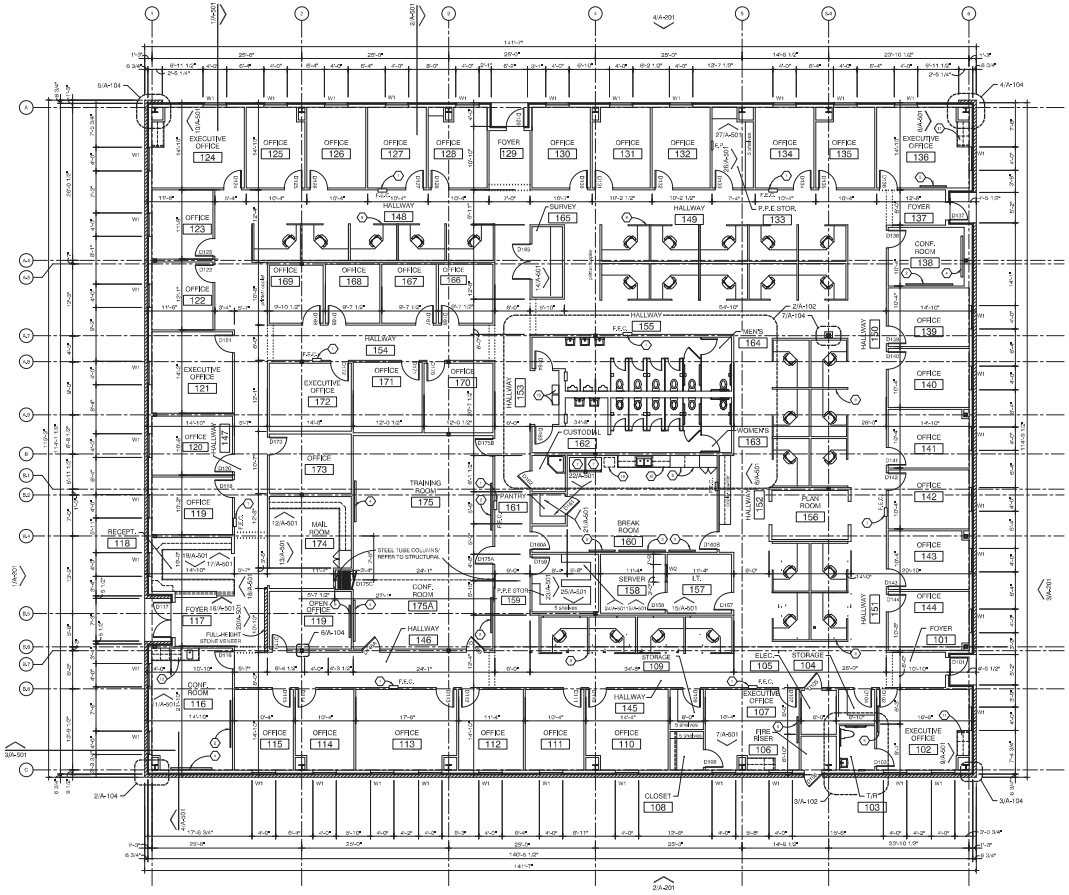

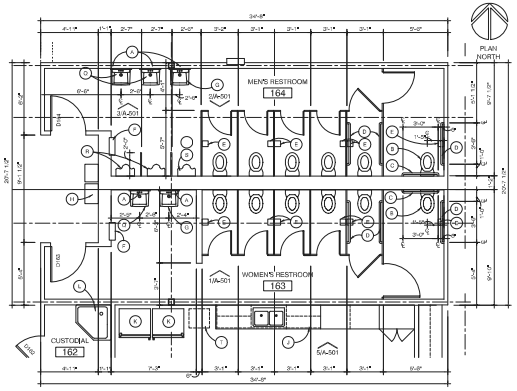

2 PARTIAL ENLARGED FLOOR PLAN
WOMENS REST ROOM AT 163 & MENS RESTROOM AT 164
1/4" = 1'

PLAN NORTH

TRUE NORTH

1 OVERALL FLOOR PLAN
1/8" = 1'

GENERAL NOTES

1. INSTALL 2" PARK WINDOW BLINDS THROUGHOUT AS SELECTED BY OWNER



3 PARTIAL ENLARGED FLOOR PLAN
TOILET ROOM AT 103
1/4" = 1'

EQUIPMENT SCHEDULE

MARK	EQUIPMENT	QUANTITY	CF/OI	CF/CI	CF/CI	GAS	VOLTS	AMPS	REMARKS
	FIRE EXTINGUISHER CABINET	10			X				TYPE ABC | STAINLESS STEEL
	8' X 4' DRY ERASE MARKER BOARD	4			X				
	8' X 4' CORK BOARD	1			X				
	70" LED TV (WALL MOUNTED)			X					INSTALL IN-WALL SOLID WOOD BLOCKING
	48" LED TV (WALL MOUNTED)			X					INSTALL IN-WALL SOLID WOOD BLOCKING
	60" LED TV (WALL MOUNTED)			X					INSTALL IN-WALL SOLID WOOD BLOCKING
	REFRIGERATOR W/ ICE MAKER	2		X					
	MICROWAVE OVEN	4		X					
	MODULAR FURNITURE			X					
	FILTERED WATER DISPENSER	3		X					
	AUTOMATIC UNDERCOUNTER ICE MAKER	2		X					115VAC X 24W
	HIGH CAPACITY AUTOMATIC UNDERCOUNTER ICE MAKER	1		X					115VAC X 24W

TOILET ACCESSORIES SCHEDULE

#	MODEL	DESCRIPTION	QUANTITY
A		ADA COMPLIANT MIRROR (WALL MOUNTED)	6
B		ADA COMPLIANT FLOOR MOUNTED TOILET FIXTURE	3
C		36" STAINLESS STEEL WALL MOUNTED ADA COMPLIANT GRAB BAR	3
D		42" STAINLESS STEEL WALL MOUNTED ADA COMPLIANT GRAB BAR	1
E		WALL MOUNTED TOILET TISSUE HOLDER	10
F		PAPER TOWEL DISPENSER	2
G		ADA COMPLIANT WALL HUNG LAVATORY	5
H		FILTERED WATER DISPENSERS	3
I		HIGH CAPACITY AUTOMATIC UNDER COUNTER ICE MAKER	1
J		REFRIGERATOR FREEZER WITH ICE MAKER	2
K		CUSTODIAL FLOOR SINK	1
L		STANDARD WALL HUNG LAVATORY	3
M		STANDARD WALL HUNG URINAL	2
N		ADA COMPLIANT WALL HUNG LAVATORY	1
O		FILTERED WATER DISPENSER	1

PROJECT NO. 18002

DATE 07/18/2018

DNT CONSTRUCTION OFFICE BUILDING

2300 PICADILLY DRIVE
ROUND ROCK, TEXAS 78664

REVISIONS

DNT CONSTRUCTION
2300 Picadilly Drive
Round Rock, Texas 78664
(512) 852-0700
inquiries@dntconstruction.com

A-102

OVERALL FLOOR PLAN